

AC axial fan

straight blades (A series)

with guard grille for short nozzle

S2D250-AF14-09 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S2D250-AF14-09	
Motor	M2D068-CC	
Nominal voltage	VAC	460
Wiring		Y
Frequency	Hz	60
Method of obtaining data		ce
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	2470
Power consumption	W	190
Current draw	A	0.27
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40
Starting current	A	0.53

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC axial fan

straight blades (A series)

with guard grille for short nozzle

Technical description

Weight	2.5 kg
Fan size	250 mm
Rotor surface	Painted black
Terminal box material	PC/ABS plastic
Blade material	Sheet steel, painted black
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-1; CSA C22.2 No. 100




AC axial fan

straight blades (A series)

with guard grille for short nozzle

Product drawing

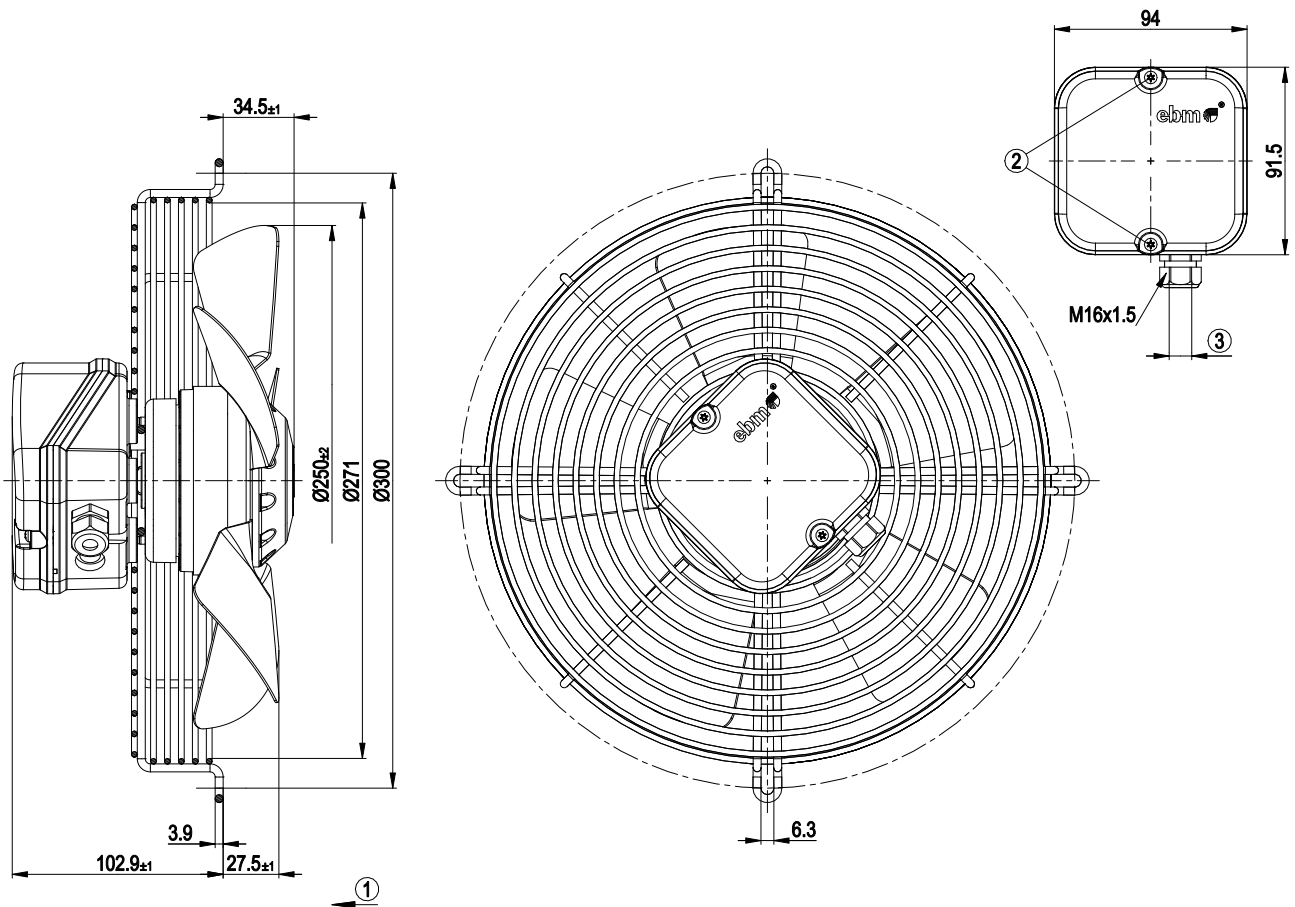


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter max. 10 mm, tightening torque 3 ± 0.4 Nm

AC axial fan

straight blades (A series)
with guard grille for short nozzle

Connection diagram

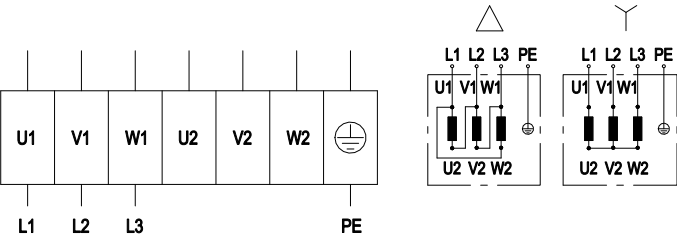


	Three-phase motor	Y	Star connection	Δ	Delta connection
L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
U2	green	V2	white	W2	yellow
PE	PE (green/yellow)				



AC axial fan

straight blades (A series)
with guard grille for short nozzle

Curves: Air performance 60 Hz

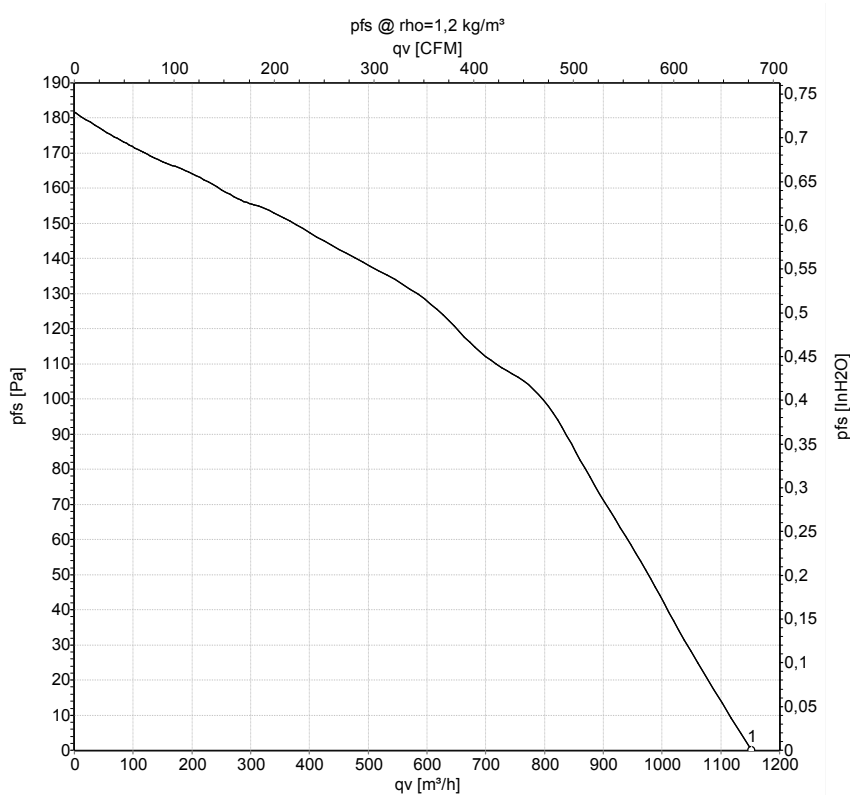

Measurement: LU-50203-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	CFM	inH2O
1	460	60	2470	190	0.27	1150	680	0.00

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow

