

EC axial fan

sickled blades (S series)
with guard grille for short nozzle

S3G300-AD56-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G300-AD56-12	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		me
Speed	min ⁻¹	1500
Power input	W	70
Current draw	A	0.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



EC axial fan

sickled blades (S series)
with guard grille for short nozzle

Technical features


Mass	3.4 kg
Size	300 mm
Surface of rotor	Coated in black
Material of terminal box	ABS plastic, black
Material of blades	PP plastic, black
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limit - Soft start - Over-temperature protected electronics / motor
EMC interference immunity	Acc. to EN 61000-6-2
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE



EC axial fan

sickled blades (S series)
with guard grille for short nozzle

Product drawing

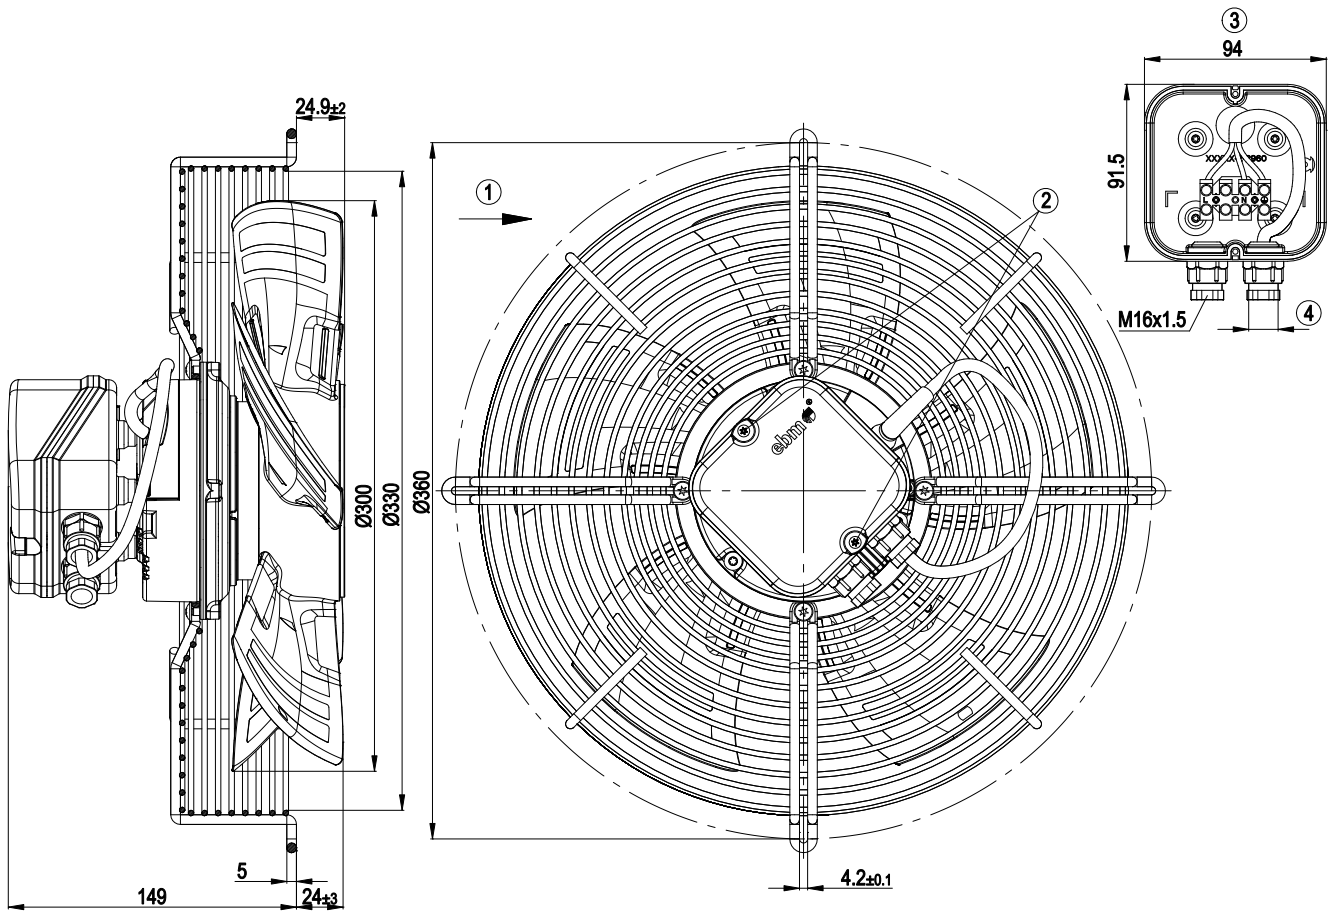


1	Direction of air flow "A"
2	Tightening torque 0.8 ± 0.15 Nm
3	Illustration without terminal box cover
4	Cable diameter: max. 7.5 mm; tightening torque 2 ± 0.3 Nm

EC axial fan

sickled blades (S series)
with guard grille for short nozzle

Connection screen

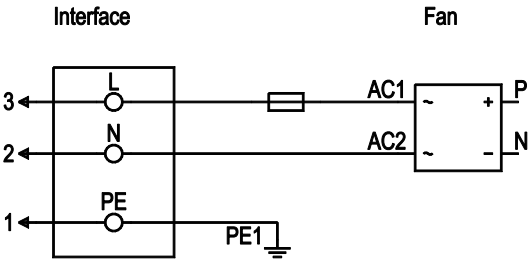


1	PE, green / yellow	2	N, blue	3	L, black
---	--------------------	---	---------	---	----------



EC axial fan

sickled blades (S series)
with guard grille for short nozzle

Charts: Air flow 50 Hz

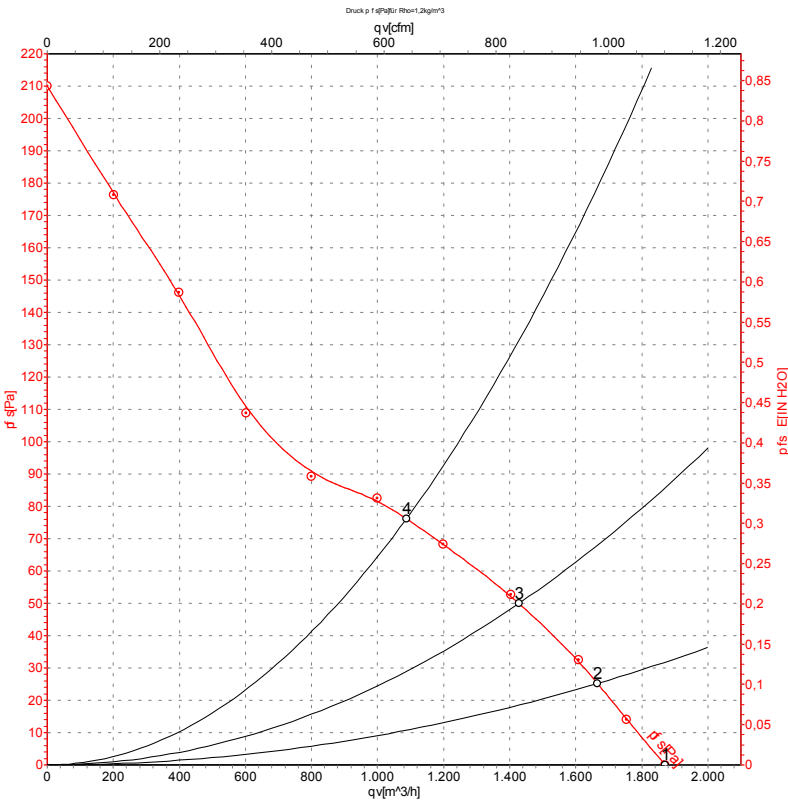

Measurement: LU-127918

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	1500	50	0.43	1870	0
2	230	50	1500	56	0.48	1665	25
3	230	50	1500	61	0.52	1430	50
4	230	50	1500	70	0.60	1090	76

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

