

EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

S3G315-AA58-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S3G315-AA58-01	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	1660
Power consumption	W	110
Current draw	A	0.8
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Technical description


Weight	4.1 kg
Fan size	315 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77; UL 2111



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Product drawing

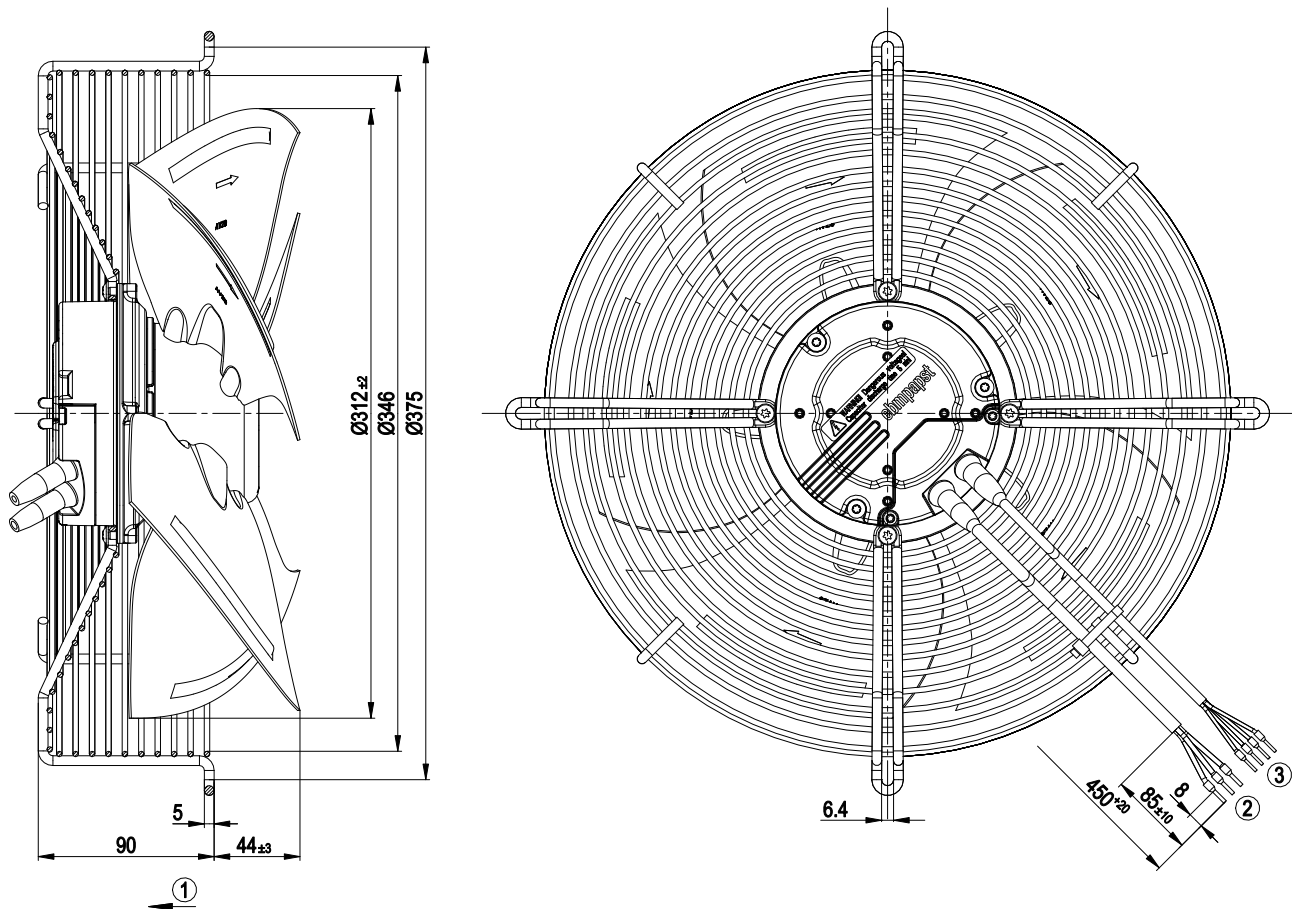


- | | |
|---|---|
| 1 | Direction of air flow "V" |
| 2 | Cable PVC 3X AWG18, 3x crimped ferrules |
| 3 | Cable PVC 4X AWG22, 4x crimped ferrules |



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Connection diagram

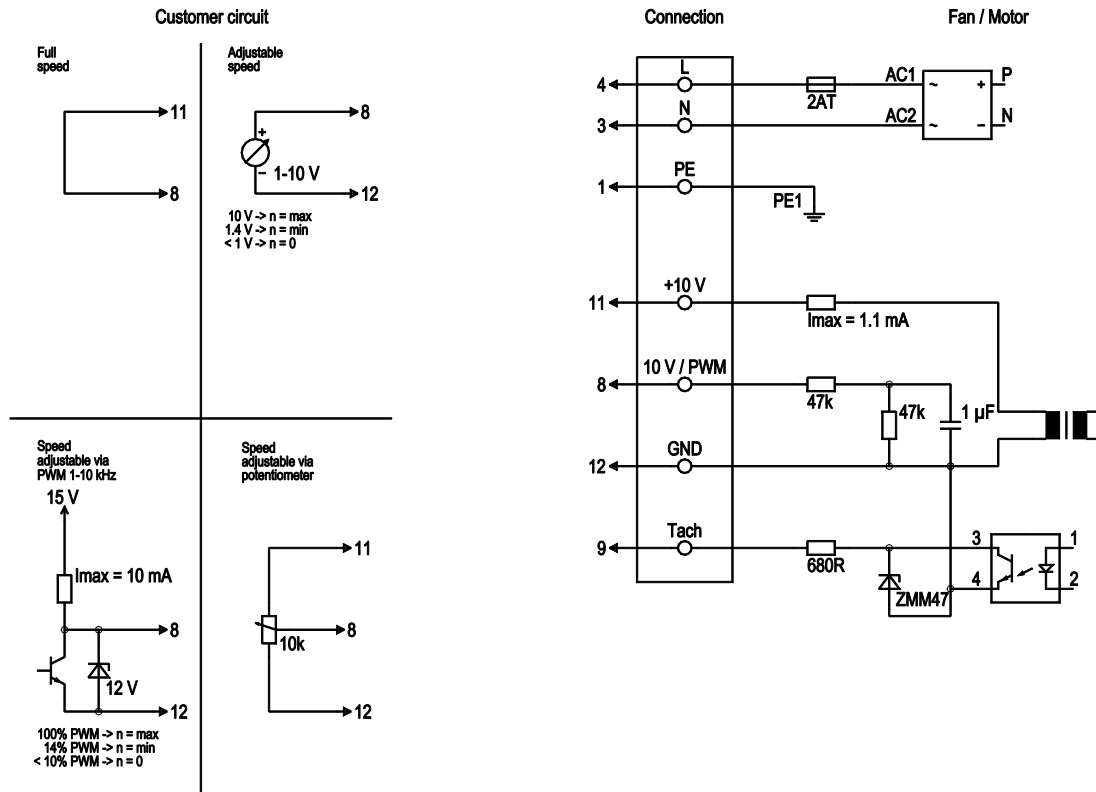


No.	Conn.	Designation	Color	Function/assignment
	4	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	8	0-10 V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	9	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	11	10V / max 1.1 mA	red	Voltage output 10 V/max. 1.1 mA, electrically isolated
	12	GND	blue	GND connection for control interface



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 50 Hz

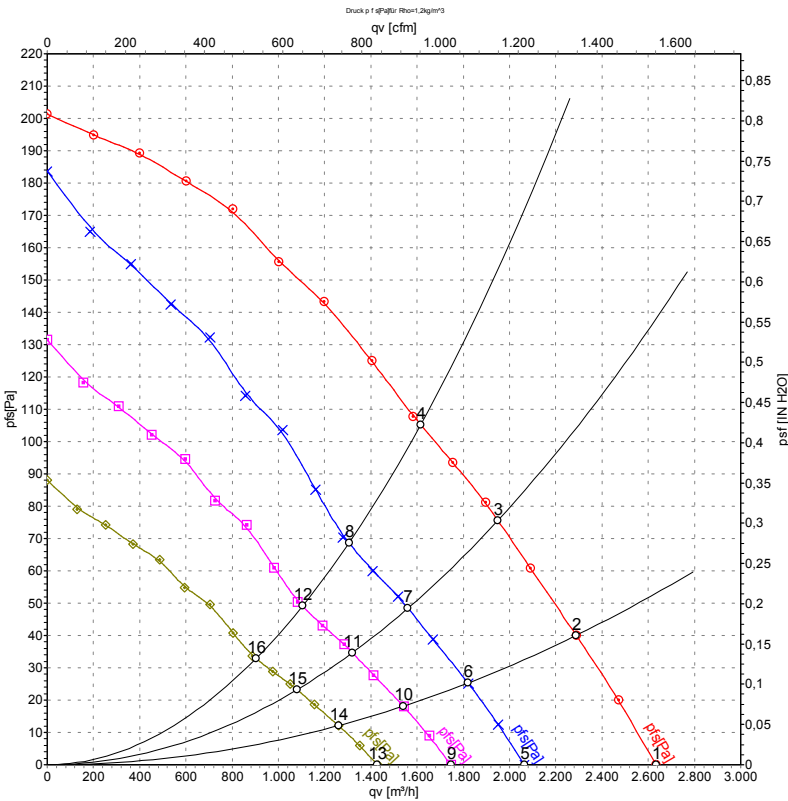

Measurement: LU-72779-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	230	50	1660	110	0.80	2635	0	1550	0.00
2	230	50	1635	120	0.88	2290	40	1345	0.16
3	230	50	1625	127	0.92	1950	75	1145	0.30
4	230	50	1610	134	0.99	1615	105	950	0.42
5	230	50	1300	52	0.38	2065	0	1215	0.00
6	230	50	1300	61	0.44	1820	26	1070	0.10
7	230	50	1300	65	0.47	1560	48	920	0.19
8	230	50	1300	71	0.52	1305	68	770	0.27
9	230	50	1100	31	0.23	1745	0	1030	0.00
10	230	50	1100	37	0.27	1540	18	905	0.07
11	230	50	1100	39	0.29	1320	35	775	0.14
12	230	50	1100	43	0.32	1105	49	650	0.20
13	230	50	900	17	0.13	1430	0	840	0.00
14	230	50	900	20	0.15	1260	12	740	0.05
15	230	50	900	22	0.16	1080	23	635	0.09
16	230	50	900	23	0.17	905	33	530	0.13

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



ebmpapst