

EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

S3G315-AE13-35 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S3G315-AE13-35	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1325
Power consumption	W	85
Current draw	A	0.8
Max. back pressure	Pa	65
Max. back pressure	in. wg	0.26
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan - HyBlade

sickle-shaped blades (S series)
with guard grille for short nozzle

Technical description

Weight	2.56 kg
Size	315 mm
Motor size	55
Rotor surface	Thick-film passivated
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Approval	CSA C22.2 No. 77; UL 1004-7 + 60730-1




EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

Product drawing

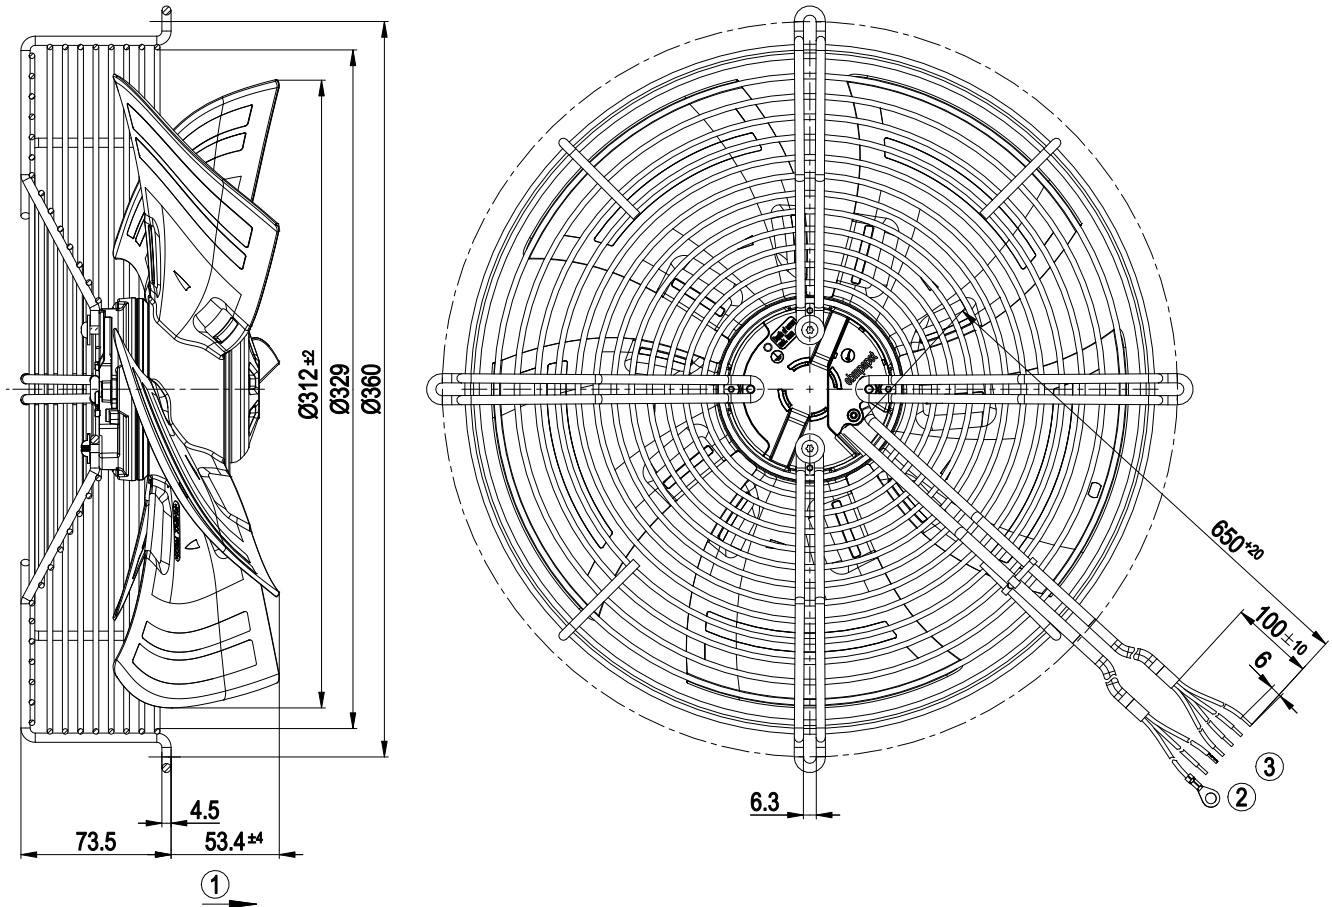


1	Direction of air flow "A"
2	Cable PVC AWG20 2x splice, 1x ring terminal dia. 5.2
3	Cable PVC AWG22 4x splice



EC axial fan - HyBlade

sickle-shaped blades (S series)
with guard grille for short nozzle


Connection diagram

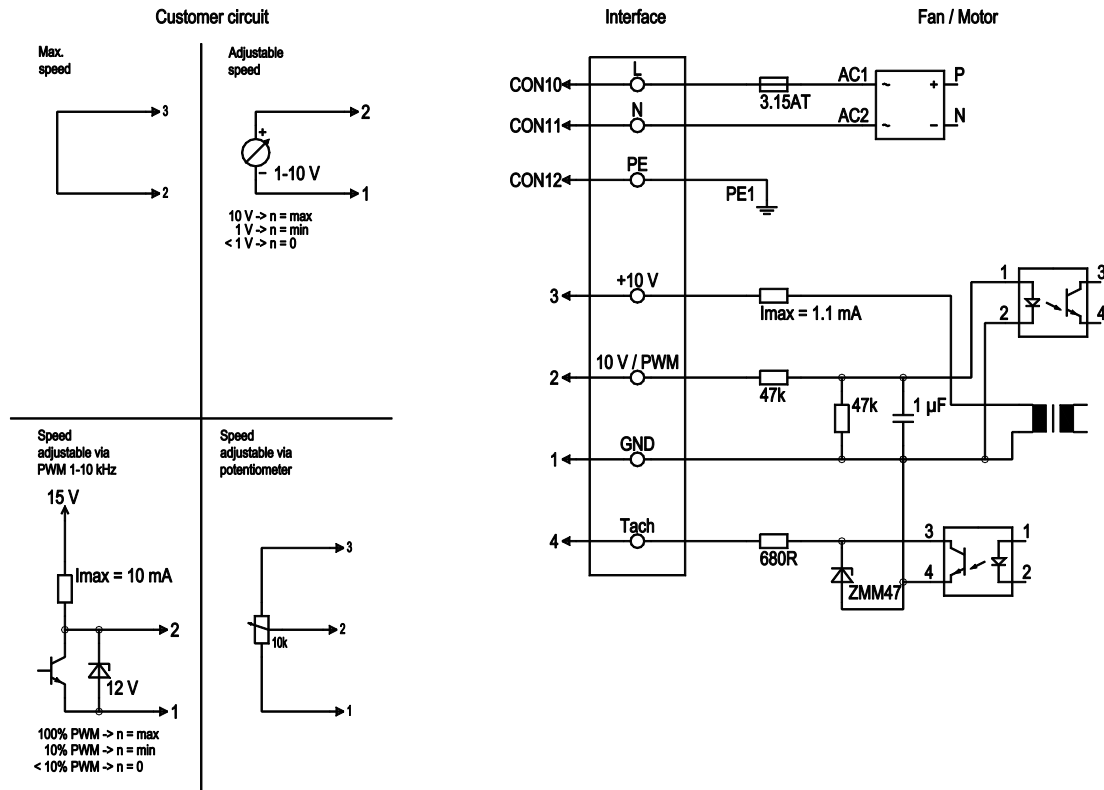

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10 V / max. 1,1 mA	red	Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof
	4	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated



Curves: Air performance 50 Hz

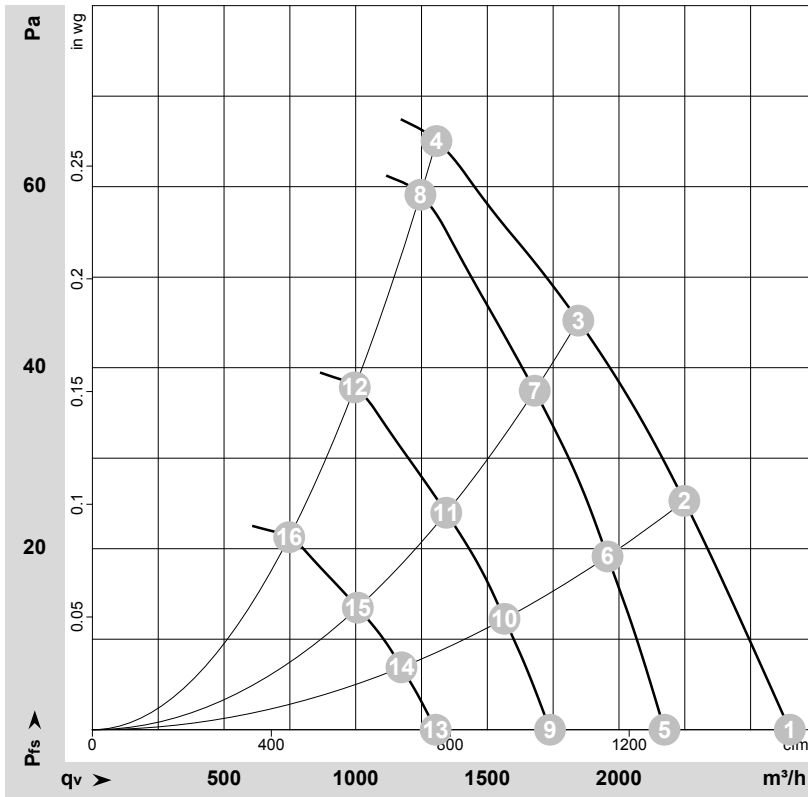

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-164675-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	1525	85	0.80	2650	0	1560	0.00
2	230	50	1435	85	0.80	2250	25	1325	0.10
3	230	50	1375	85	0.80	1845	45	1085	0.18
4	230	50	1325	85	0.80	1305	65	770	0.26
5	230	50	1250	45	0.40	2175	0	1280	0.00
6	230	50	1250	54	0.48	1955	19	1150	0.08
7	230	50	1250	62	0.55	1680	37	990	0.15
8	230	50	1250	71	0.63	1245	60	735	0.24
9	230	50	1000	23	0.21	1740	0	1025	0.00
10	230	50	1000	28	0.25	1565	12	920	0.05
11	230	50	1000	32	0.28	1345	24	790	0.10
12	230	50	1000	36	0.32	995	38	585	0.15
13	230	50	750	10.0	0.09	1305	0	770	0.00
14	230	50	750	12	0.10	1175	7	690	0.03
15	230	50	750	13	0.12	1010	13	595	0.05
16	230	50	750	15	0.14	745	21	440	0.08

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

