

# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for short nozzle

S3G400-AO03-62 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | S3G400-AO03-62    |            |
| Motor                    | M3G074-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml/ce      |
| Speed (rpm)              | min <sup>-1</sup> | 1200       |
| Power consumption        | W                 | 165        |
| Current draw             | A                 | 1.3        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 34.9   | 28.7      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 46.2   | 40        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 0.16 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 3155 |
| 09 Pressure increase $p_{fs}$ | Pa                | 63   |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1190 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-155047



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for short nozzle

## Technical description


|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 4.6 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Size                                                                       | 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Motor size                                                                 | 74                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Rotor surface                                                              | Galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Blade material                                                             | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Guard grille material                                                      | Steel, coated with black plastic (RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                              |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Max. permitted ambient temp. for motor (transport/storage)                 | +70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                             |
| Condensation drainage holes                                                | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Cooling hole/opening                                                       | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Motor bearing                                                              | Ball bearing with low-temperature lubricant                                                                                                                                                                                                                                                                                                                                                                                                              |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                                                              |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                         |
| Conformity with standards                                                  | EN 60204-1; EN 60034-1; EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Approval                                                                   | EAC; UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1                                                                                                                                                                                                                                                                                                                                                                                            |



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for short nozzle

## Product drawing

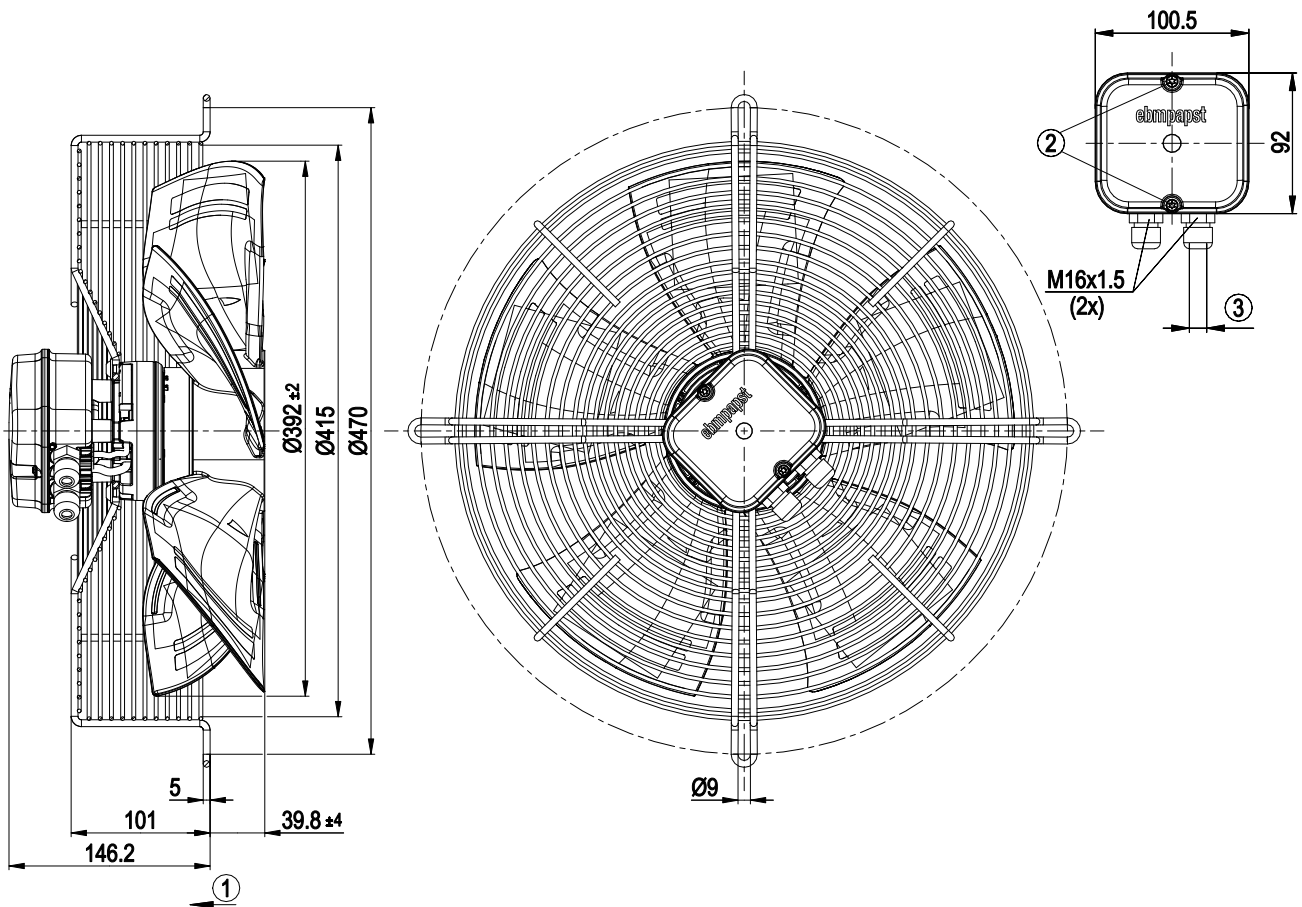


|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Airflow direction "V"                                          |
| 2 | Tightening torque $1.5 \pm 0.2$ Nm                             |
| 3 | Cable diameter max. 7.5 mm; tightening torque $1.3 \pm 0.2$ Nm |

# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for short nozzle

## Connection diagram

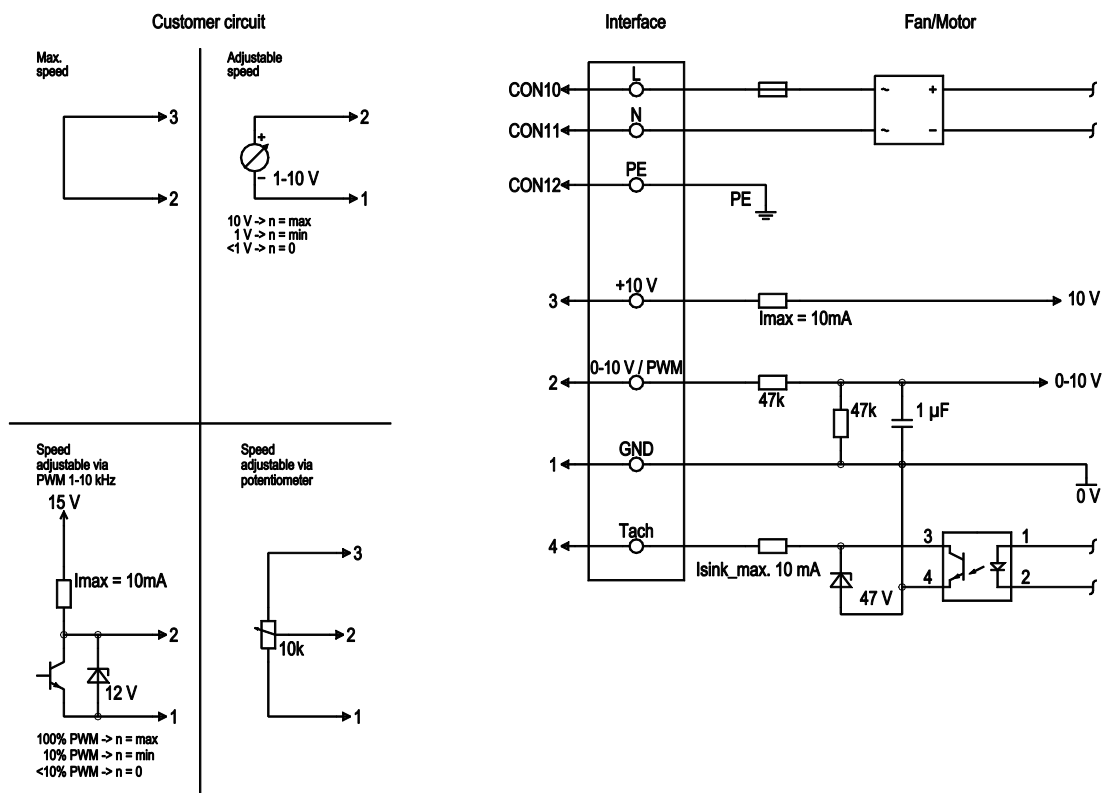


| No. | Conn. | Designation | Color        | Function/assignment                                                                                                                   |
|-----|-------|-------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------|
|     | CON10 | L           | black        | Supply connection, power supply, phase, see nameplate for voltage range                                                               |
|     | CON11 | N           | blue         | Supply connection, power supply, neutral conductor, see nameplate for voltage range                                                   |
|     | CON12 | PE          | green/yellow | Ground connection                                                                                                                     |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V / PWM control input, $R_i=100\text{ k}\Omega$ , SELV                                                                           |
|     | 4     | Tach        | white        | Tach output, open collector, 1 pulse per revolution, $I_{sink\ max} = 10\text{ mA}$ , SELV                                            |
|     | 3     | +10 V       | red          | Fixed voltage output 10 VDC $\pm 3\%$ , $I_{max.} 10\text{ mA}$ , short-circuit-proof, power supply for ext. devices (e.g. pot), SELV |
|     | 1     | GND         | blue         | Reference ground for control interface, SELV                                                                                          |



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for short nozzle

## Curves: Air performance 50 Hz

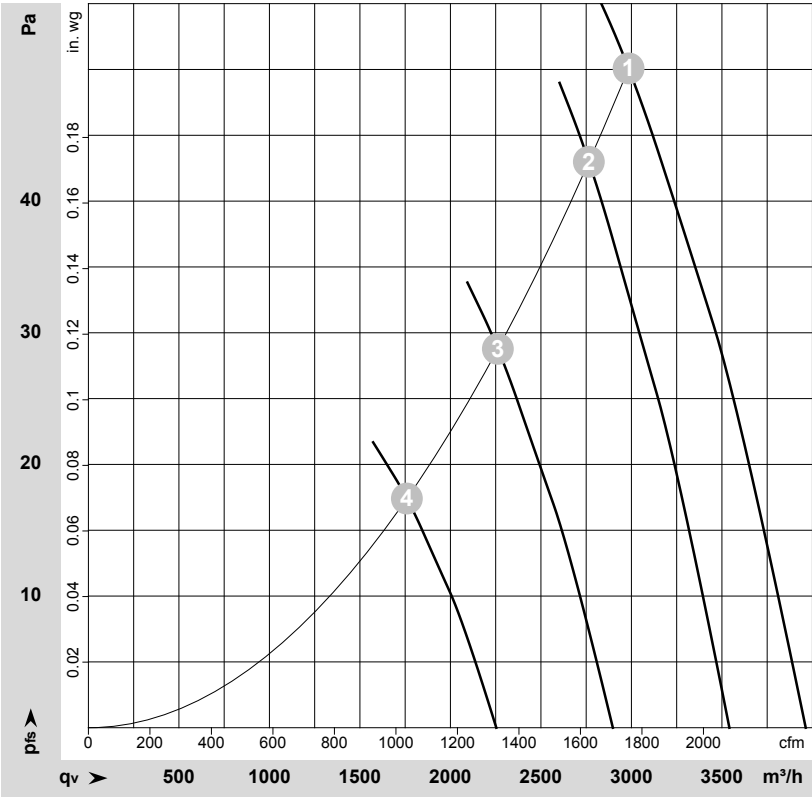

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-153456-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 1~    | 230 | 50 | 1200              | 165             | 1.30 | 58                | 66                | 2985              | 50              | 1755           | 0.20            |
| 2 | 1~    | 230 | 50 | 1100              | 131             | 1.08 | 56                | 64                | 2765              | 43              | 1625           | 0.17            |
| 3 | 1~    | 230 | 50 | 900               | 72              | 0.59 | 51                | 59                | 2260              | 29              | 1330           | 0.12            |
| 4 | 1~    | 230 | 50 | 700               | 34              | 0.28 | 45                | 53                | 1760              | 18              | 1035           | 0.07            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

