

EC axial fan - HyBlade

sickled blades (S series)
with guard grille for short nozzle

S3G450-CK65-02 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G450-CK65-02	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		me
Speed (rpm)	min ⁻¹	835
Power input	W	105
Current draw	A	0.8
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	4.8 kg
Size	450 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of rotation	"A"
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Control input 0-10 VDC / PWM - Output 10 VDC, max. 1.1 mA - Tach output - Over-temperature protected electronics / motor - Motor current limit - Soft start
EMC interference immunity	Acc. to EN 61000-6-2
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1

EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

Product drawing

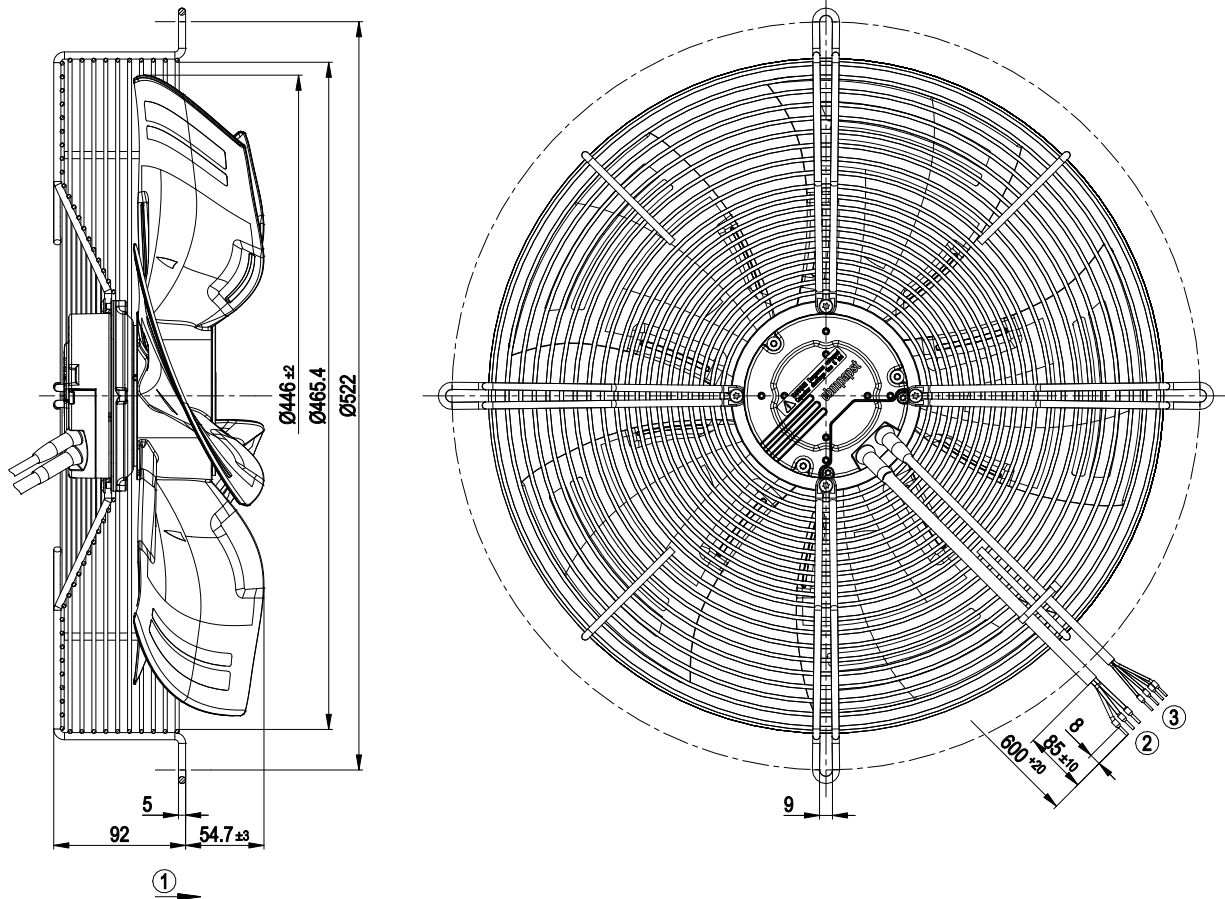


1	Direction of air flow "A"
2	Connection line PVC AWG18, 3x crimped core-end sleeves
3	Connection line PVC AWG22, 4x crimped core-end sleeves

EC axial fan - HyBlade

sickled blades (S series)


with guard grille for short nozzle

Connection screen

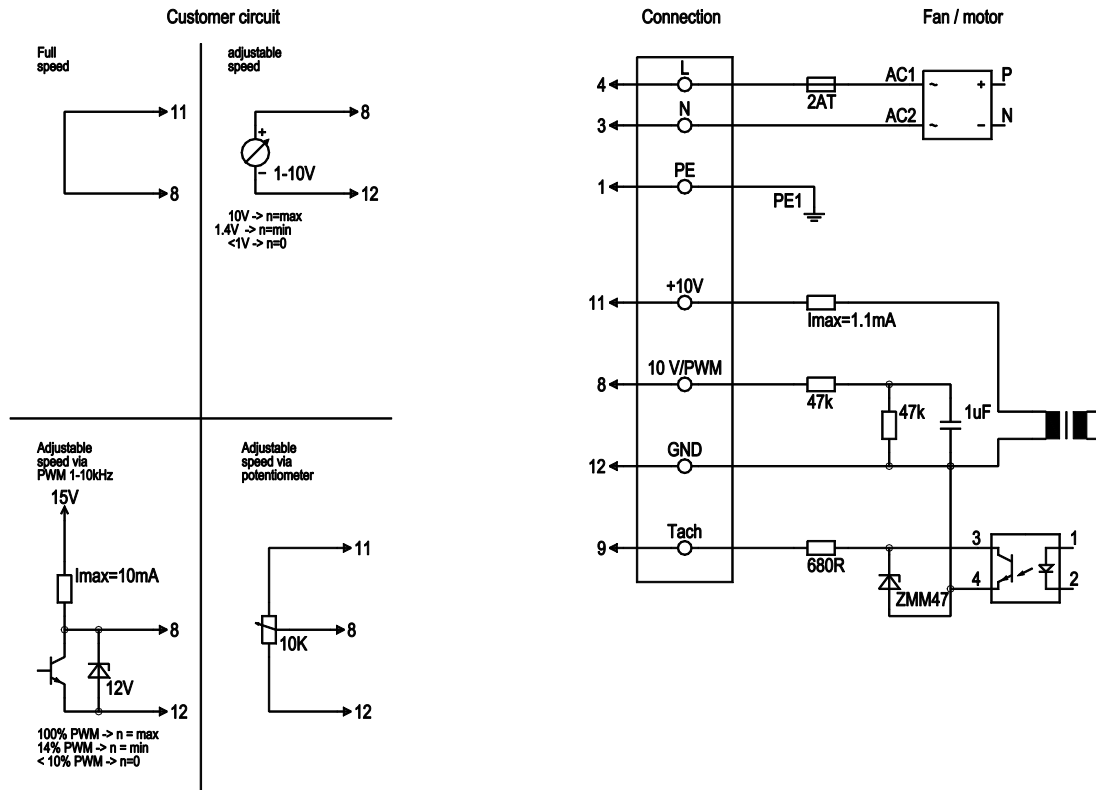

No.	Conn.	Designation	Colour	Function / assignment
	4	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	8	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	9	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	11	10V / max 1.1 mA	red	Voltage output 10 V / max. 1.1 mA, electrically isolated
	12	GND	blue	GND - Connection for control interface

Charts: Air flow 50 Hz

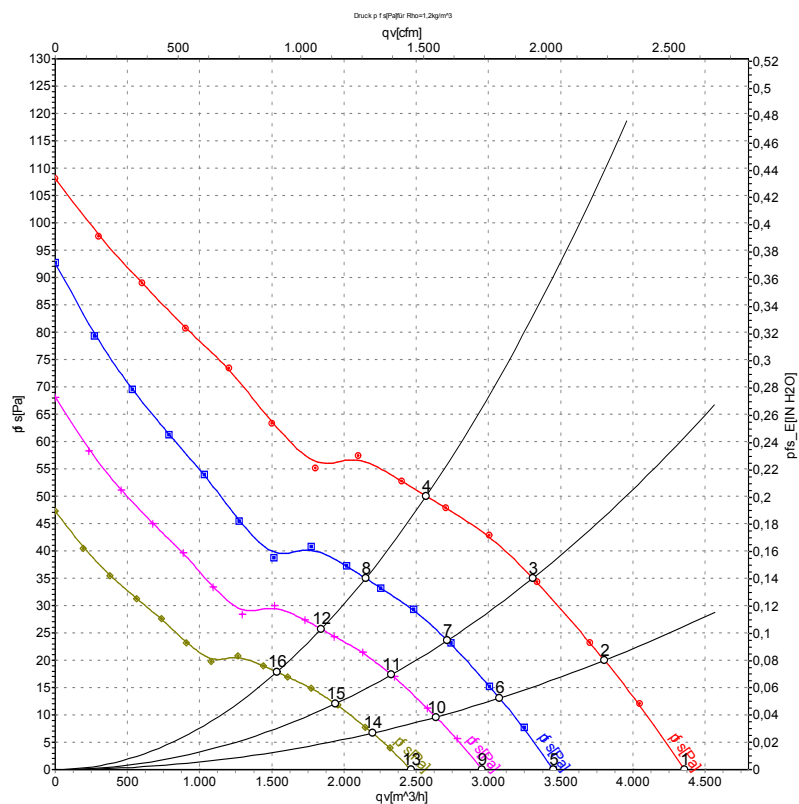

Measurement: LU-122753-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH2O
1	230	50	885	90	0.68	56	62	4355	0	2565	0.00
2	230	50	865	96	0.73	54	60	3800	20	2240	0.08
3	230	50	850	100	0.76	51	58	3305	35	1945	0.14
4	230	50	835	105	0.80	50	57	2570	50	1510	0.20
5	230	50	700	45	0.34	51	57	3450	0	2030	0.00
6	230	50	700	51	0.39	49	55	3075	13	1810	0.05
7	230	50	700	56	0.42	47	53	2715	24	1600	0.10
8	230	50	700	62	0.47	46	53	2150	35	1265	0.14
9	230	50	600	28	0.21	48	54	2955	0	1740	0.00
10	230	50	600	32	0.24	46	52	2635	10	1550	0.04
11	230	50	600	35	0.27	44	50	2325	17	1370	0.07
12	230	50	600	39	0.29	43	50	1840	26	1085	0.10
13	230	50	500	16	0.12	44	50	2465	0	1450	0.00
14	230	50	500	19	0.14	42	48	2195	7	1295	0.03
15	230	50	500	20	0.15	40	46	1940	12	1140	0.05
16	230	50	500	22	0.17	39	46	1535	18	905	0.07

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

