

EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

S3G500-BE33-01 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G500-BE33-01	
Motor	M3G112-GA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1440
Power consumption	W	1050
Current draw	A	1.9
Max. back pressure	Pa	180
Max. back pressure	in. wg	0.72
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	37.4	33.8
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		43.6	40
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	1.03
09 Air flow q_v	m³/h	6540
09 Pressure increase p_{fs}	Pa	196
10 Speed (rpm) n	min ⁻¹	1455
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-102191



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Technical description


Weight	11.7 kg
Size	500 mm
Motor size	112
Rotor surface	Cast in PA plastic
Electronics housing material	Die-cast aluminum, painted black
Impeller material	PA plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - Alarm relay - Integrated PID controller - Motor current limitation - PFC, passive - RS-485 ebmBUS - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CCC; EAC



EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Product drawing

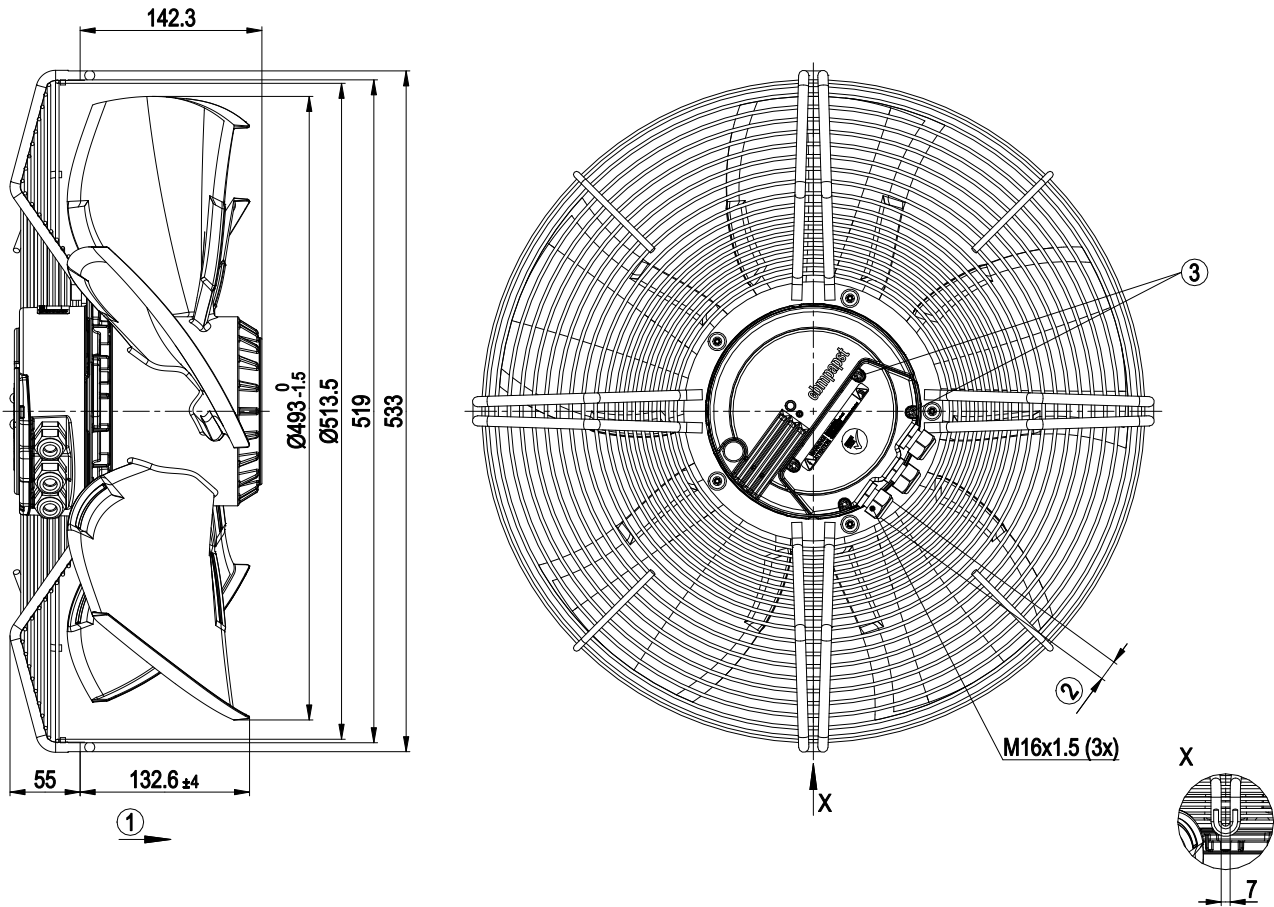


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 2.5 ± 0.4 Nm
3	Tightening torque 3.5 ± 0.5 Nm

EC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle


Connection diagram

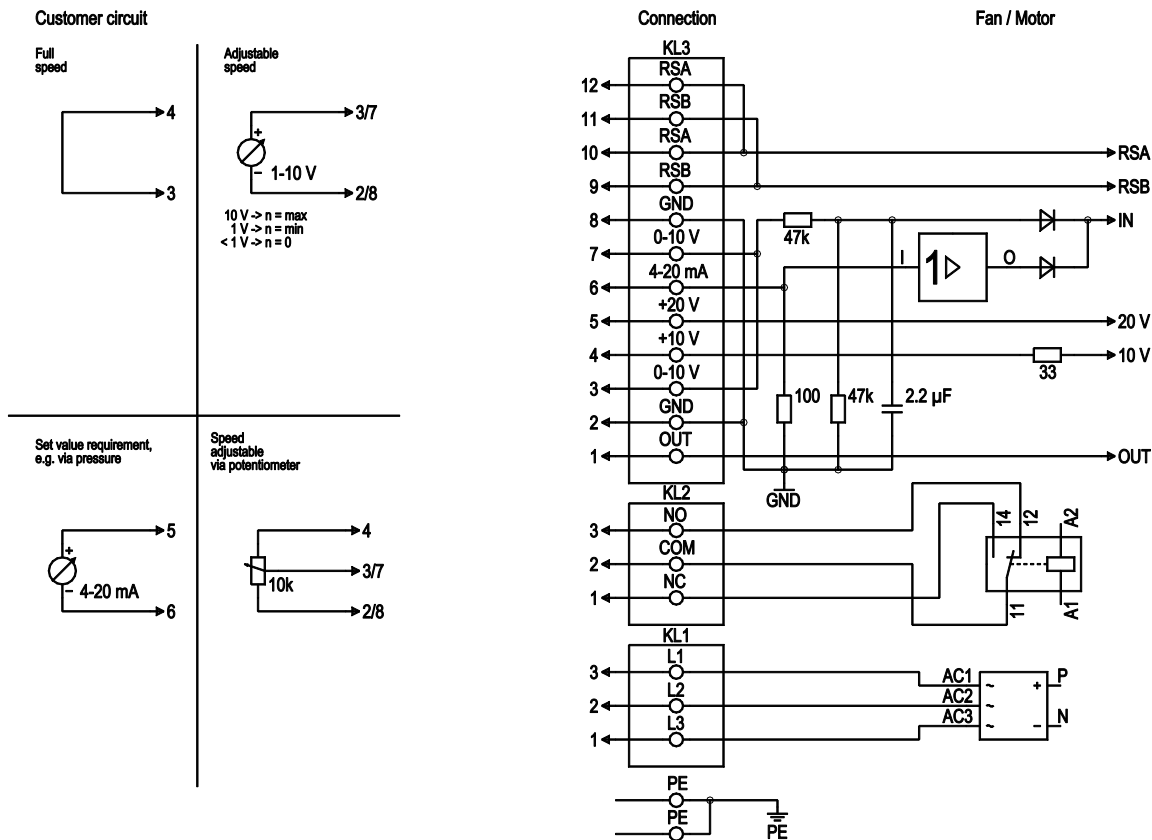

No.	Conn.	Designation	Function/assignment
PE		PE	Protective earth terminal
KL1	1, 2, 3	L1, L2, L3	Power supply 50/60 Hz
KL2	1	NC	Floating status contact, break for failure
KL2	2	COM	floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status contact, make for failure
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of current motor modulation level: 1 V corresponds to 10% modulation level. 10 V corresponds to 100% modulation level.
KL3	2, 8	GND	Reference ground for control interface, SELV
KL3	3, 7	0-10 V	Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBUS, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBUS, RSA, SELV



Curves: Air performance 50 Hz

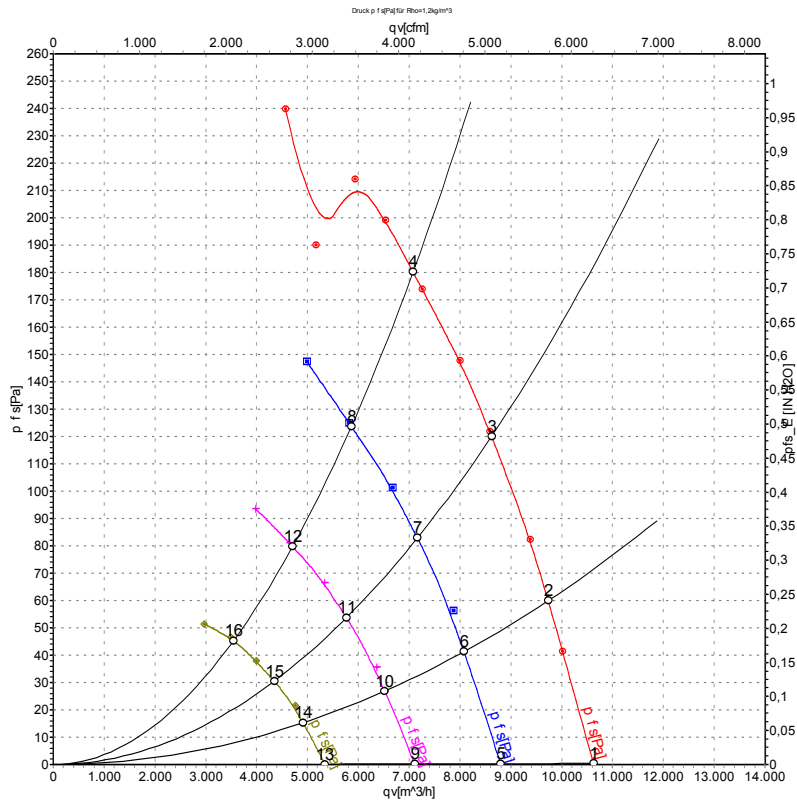

Measurement: LU-102191-1
 Measurement: LU-120643-1
 Measurement: LU-120644-1
 Measurement: LU-120645-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _V	P _{fs}	q _V	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	400	50	1440	918	1.48	72	77	10630	0	6255	0.00
2	400	50	1440	979	1.56	73	79	9735	60	5730	0.24
3	400	50	1440	1030	1.64	74	80	8620	120	5075	0.48
4	400	50	1440	1050	1.90	75	82	7075	180	4165	0.72
5	400	50	1195	499	0.92	67	73	8790	0	5175	0.00
6	400	50	1195	539	0.97	68	74	8080	44	4755	0.18
7	400	50	1195	562	1.01	69	75	7165	83	4215	0.33
8	400	50	1195	567	1.02	70	76	5865	124	3450	0.50
9	400	50	960	267	0.54	61	68	7105	0	4185	0.00
10	400	50	960	286	0.57	61	69	6515	29	3835	0.12
11	400	50	960	303	0.61	62	70	5765	54	3395	0.22
12	400	50	960	312	0.62	63	71	4710	80	2770	0.32
13	400	50	720	125	0.30	52	60	5345	0	3145	0.00
14	400	50	720	133	0.31	53	61	4910	16	2890	0.06
15	400	50	720	140	0.32	53	61	4345	30	2555	0.12
16	400	50	720	141	0.32	54	62	3545	46	2085	0.18

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_V = Air flow · P_{fs} = Pressure increase

