

EC axial fan - HyBlade

sickled blades (S series)
with guard grille for full nozzle

S3G630-CC52-57 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G630-CC52-57	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	690
Power input	W	184
Current draw	A	1.2
Max. back pressure	Pa	55
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	41.5	29
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		52.5	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.18
09 Air flow q_v	m³/h	4985
09 Pressure increase p_{fs}	Pa	48
10 Speed (rpm) n	min ⁻¹	700
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-116824



Technical features


Mass	11 kg
Size	630 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H2
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Output 10 VDC, max. 10 mA - Alarm relay - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

EC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle


Product drawing

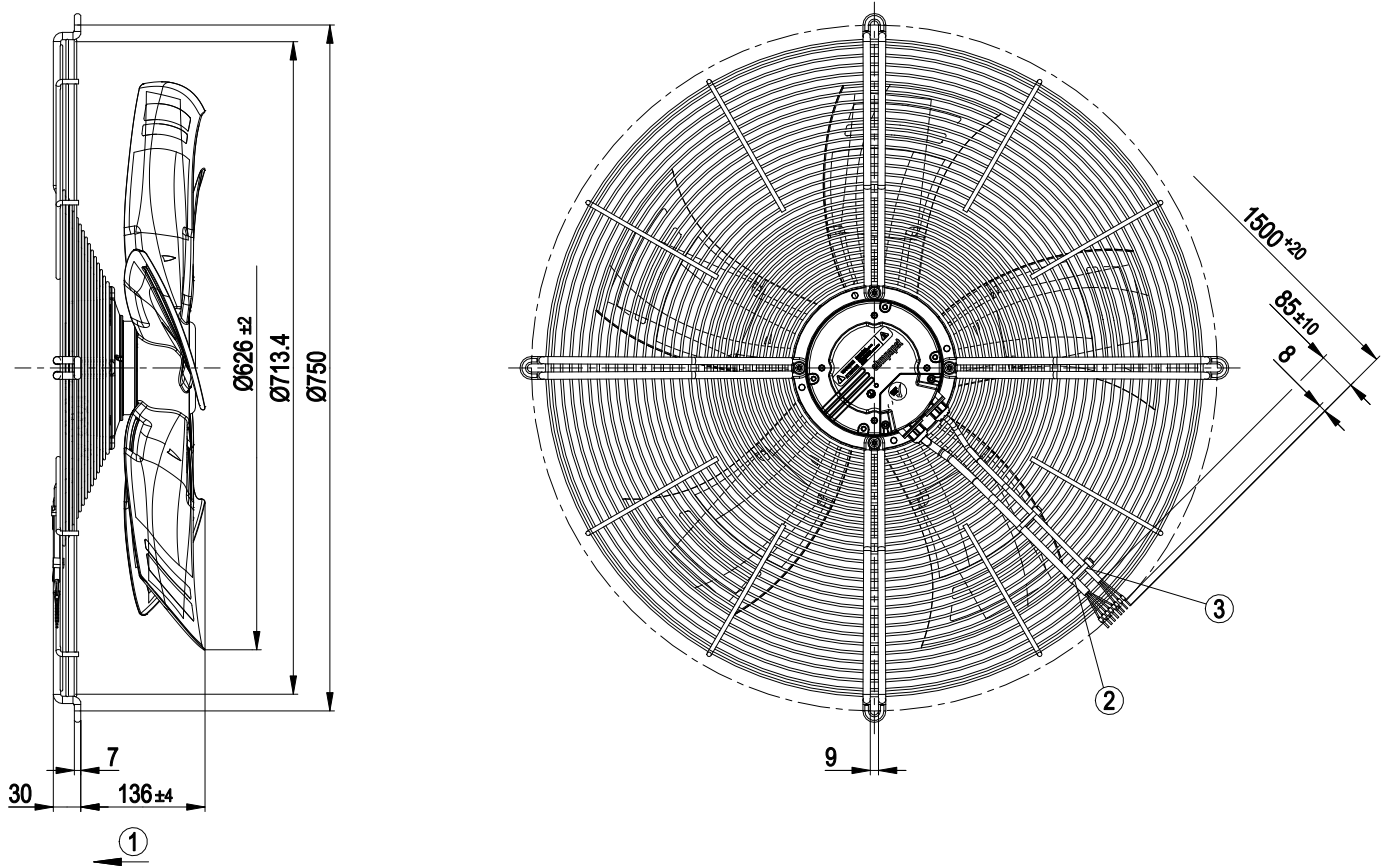

- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Connection line AWG18, 5x crimped core-end sleeves |
| 3 | Connection line PVC AWG22, 3x crimped core-end sleeves |

Connection screen

Customer circuit

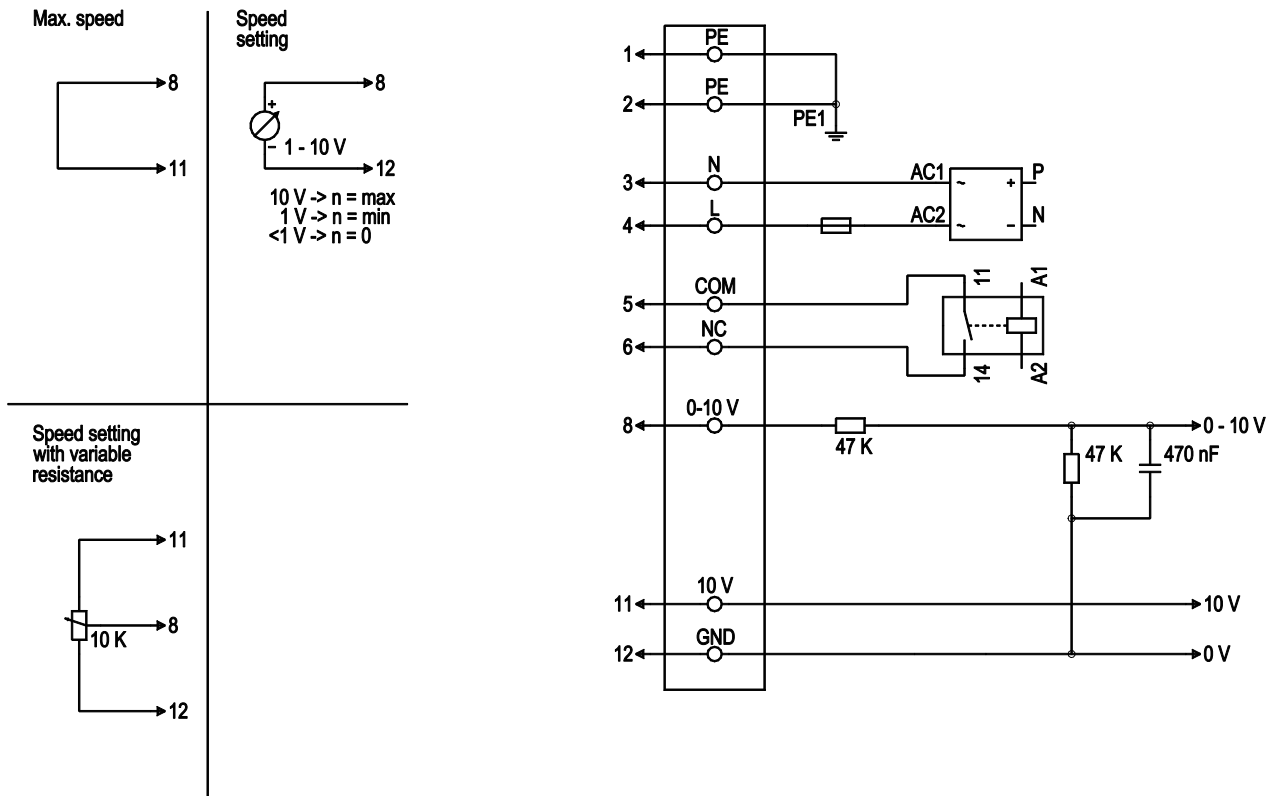


No.	Conn.	Designation	Colour	Function / assignment
1	1,2	PE	green/yellow	Protective earth
1	3	N	blue	Supply voltage, neutral conductor, 50/60 Hz
1	4	L	black	Supply voltage, phase, 50/60 Hz
1	5	COM	white 1	Floating status message contact, break for failure (2 A, max. 250 VAC, min. 10 mA, AC1)
1	6	NC	white 2	Floating status message contact, break for failure
2	8	0 - 10 V	yellow	Control input, set value 0 - 10 VDC, impedance 100 kOhm, SELV
2	11	10 VDC	red	Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for ext. devices (e.g. potentiometer), SELV
2	12	GND	blue	Reference mass for control interface, SELV

EC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Charts: Air flow 50 Hz

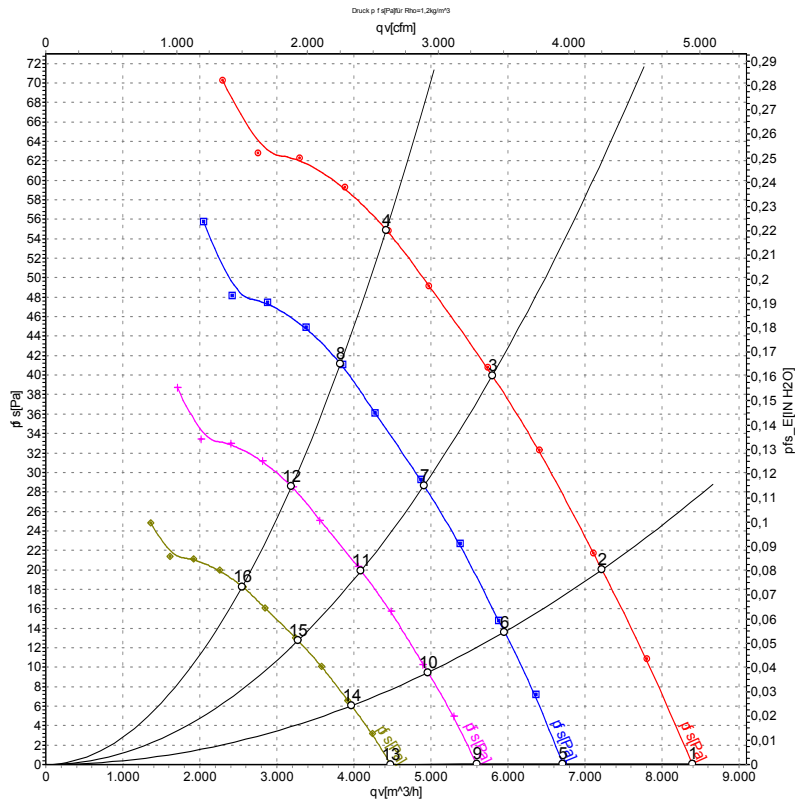

Measurement: LU-116824-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	L _{pA_{in}}	L _{wA_{in}}	L _{wA_{out}}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	inH2O
1	230	50	750	141	0.90	55	61	60	8395	0	4940	0.00
2	230	50	730	158	1.01	55	60	60	7220	20	4250	0.08
3	230	50	710	174	1.10	55	61	60	5800	40	3415	0.16
4	230	50	690	184	1.20	56	63	63	4420	55	2605	0.22
5	230	50	600	72	0.46	50	56	55	6715	0	3955	0.00
6	230	50	600	89	0.56	51	56	55	5955	14	3505	0.06
7	230	50	600	106	0.67	51	57	56	4910	29	2890	0.12
8	230	50	600	119	0.75	53	60	60	3830	41	2255	0.16
9	230	50	500	42	0.27	46	52	52	5595	0	3295	0.00
10	230	50	500	51	0.33	47	52	51	4965	10	2920	0.04
11	230	50	500	61	0.39	47	53	52	4095	20	2410	0.08
12	230	50	500	69	0.43	49	56	56	3190	29	1880	0.12
13	230	50	400	21	0.14	41	47	47	4475	0	2635	0.00
14	230	50	400	26	0.17	42	47	47	3970	6	2335	0.02
15	230	50	400	31	0.20	42	48	47	3275	13	1930	0.05
16	230	50	400	35	0.22	44	51	51	2550	18	1500	0.07

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side · L_{wA_{out}} = Sound power level outlet side
q_v = Air flow · p_{fs} = Pressure increase

