

sickle-shaped blades (S series)

with guard grille for full nozzle

S3G800-CI95-J5 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	S3G800-CI95-J5	
Motor	M3G112-IA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	950
Power consumption	W	1550
Current draw	A	2.5
Max. back pressure	Pa	180
Max. back pressure	in. wg	0.72
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	65

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	47.9	34.6	09 Power consumption P_{ed}	kW	1.42
02 Measurement category		A		09 Air flow q_v	m ³ /h	15425
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	148
04 Efficiency grade N		53.3	40	10 Speed (rpm) n	min ⁻¹	955
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-206108

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



Technical description

Weight	23.3 kg
Size	800 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Blade pitch	0°
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Rotor on bottom
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"> - Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected

EC axial fan - AxiBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE
Approval	EAC




EC axial fan - AxiBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

Product drawing

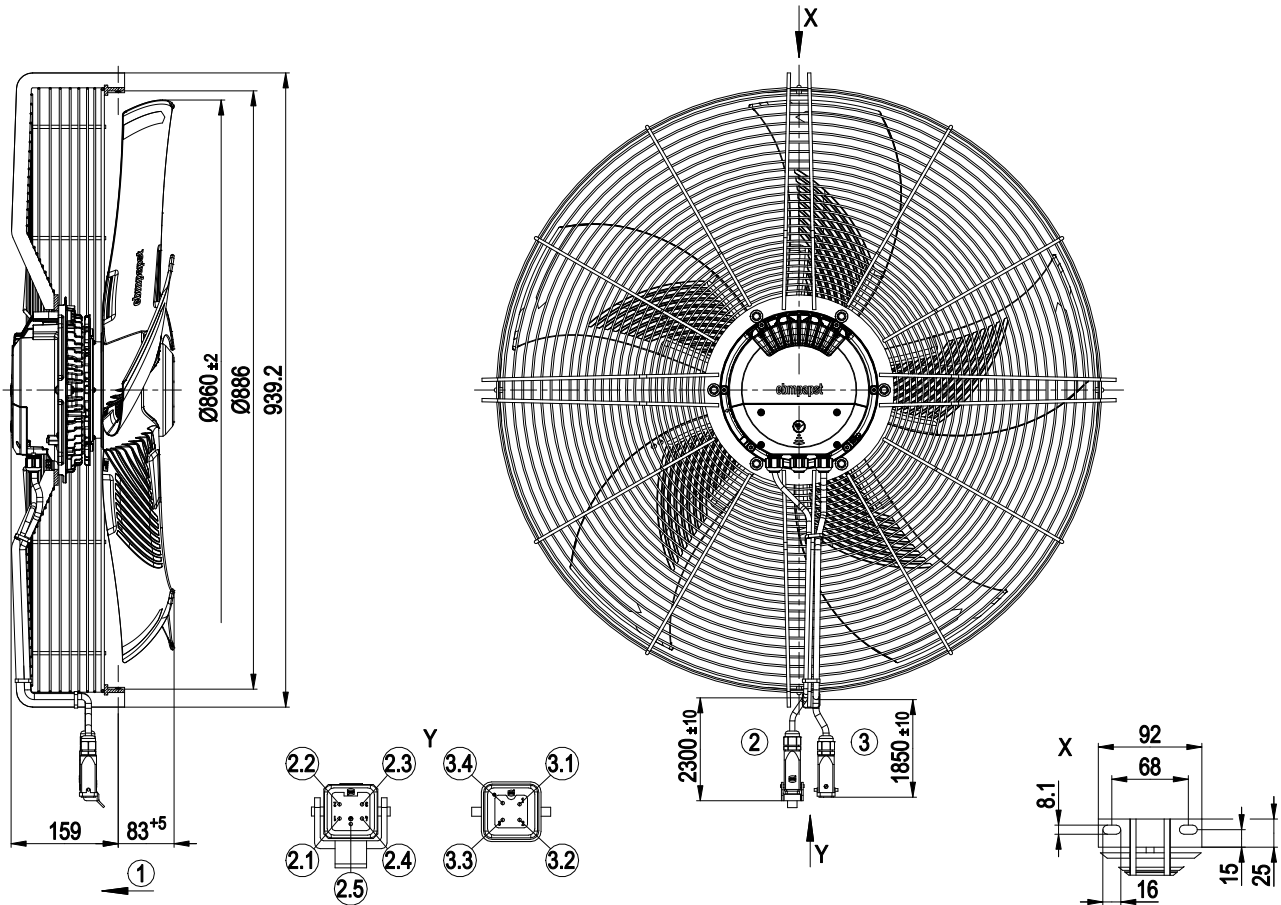


1	Airflow direction "V"
2	Cable Ölflex Heat 105 MC 3x 1.0 mm ² Connector housing WESTEC 7803.6231.1, 5-pole pin insert WESTEC 7204.6102.4
2.1	not used
2.2	IO3
2.3	IO2
2.4	GND
2.5	not used
3	Cable Ölflex Heat 105 MC 4G 1.5 mm ² Connector housing WESTEC 7803.6227.1, 4-pole pin insert WESTEC 7203.6101.0
3.1	L1
3.2	L2
3.3	L3
3.4	PE



EC axial fan - AxiBlade

sickle-shaped blades (S series)
with guard grille for full nozzle

Connection diagram

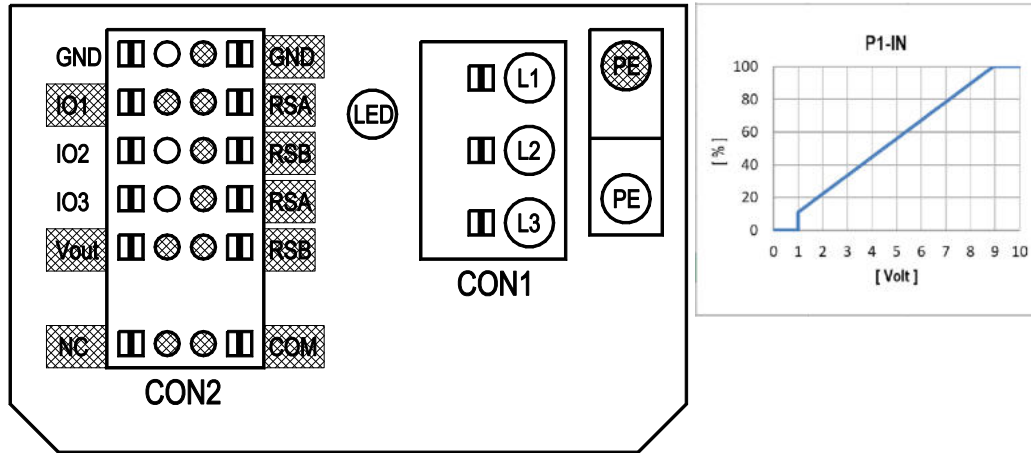


shaded gray => not brought out via leads

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Diagnostic output (open collector), SELV U _{max} = 50 VDC, I _{max} = 20 mA
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, R _i =100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - low active, function: Disable input, SELV - inactive: Pin open or applied voltage 3.5-50 VDC - active: applied voltage < 1.5 VDC
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, P _{max} =800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve



Curves: Air performance 50 Hz

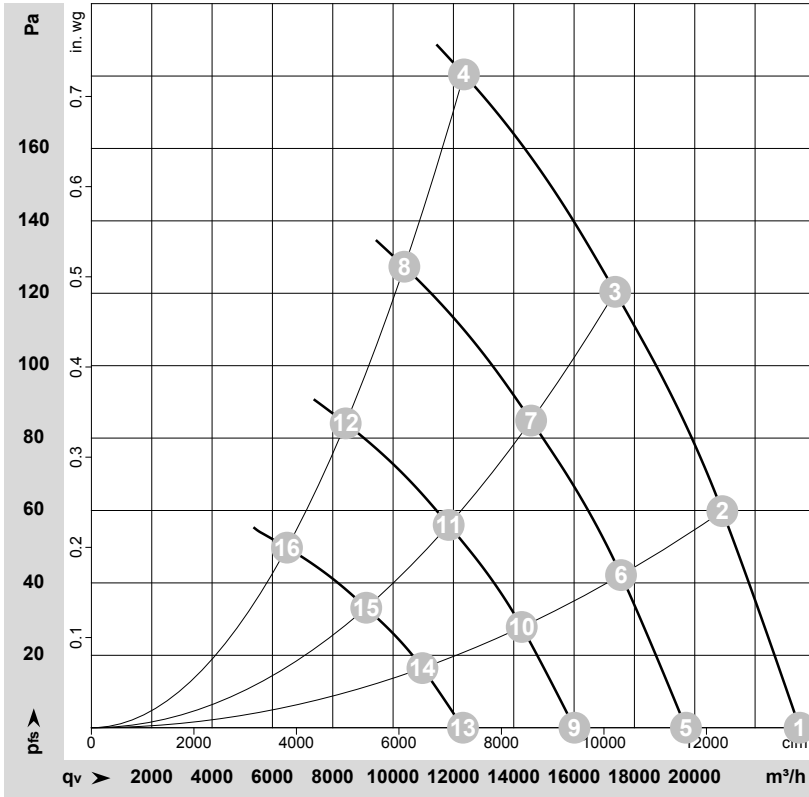

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-206108-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	950	862	1.51	69	75	76	23475	0	13815	0.00
2	3~	400	50	950	1101	1.83	67	74	75	20915	60	12310	0.24
3	3~	400	50	950	1319	2.14	68	75	75	17365	120	10220	0.48
4	3~	400	50	950	1550	2.50	75	82	83	12350	180	7270	0.72
5	3~	400	50	800	510	0.89	64	71	72	19705	0	11600	0.00
6	3~	400	50	800	651	1.08	63	70	70	17555	42	10335	0.17
7	3~	400	50	800	781	1.27	64	70	71	14575	85	8580	0.34
8	3~	400	50	800	926	1.47	70	78	79	10375	127	6105	0.51
9	3~	400	50	650	274	0.48	59	66	66	16010	0	9425	0.00
10	3~	400	50	650	349	0.58	58	64	65	14265	28	8395	0.11
11	3~	400	50	650	419	0.68	59	65	65	11845	56	6970	0.22
12	3~	400	50	650	496	0.79	65	72	73	8430	84	4960	0.34
13	3~	400	50	500	125	0.22	52	59	60	12315	0	7250	0.00
14	3~	400	50	500	159	0.26	51	58	58	10975	17	6460	0.07
15	3~	400	50	500	191	0.31	52	58	59	9110	33	5360	0.13
16	3~	400	50	500	226	0.36	59	66	67	6485	50	3815	0.20

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

