

# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for full nozzle

S3G910-BO83-01 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRB 590142



## Nominal data

Type	S3G910-BO83-01	
Motor	M3G112-IA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	610
Power consumption	W	625
Current draw	A	1.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	45.5	32.2	09 Power consumption $P_{ed}$	kW	0.59
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	11680
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	76
04 Efficiency grade N		53.3	40	10 Speed (rpm) n	min <sup>-1</sup>	615
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-120677



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for full nozzle

## Technical description


<b>Weight</b>	19.9 kg
<b>Fan size</b>	910 mm
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum
<b>Blade material</b>	Press-fitted sheet steel blank, sprayed with PP plastic
<b>Guard grille material</b>	Steel, coated with black plastic (RAL 9005)
<b>Number of blades</b>	5
<b>Airflow direction</b>	"V"
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP54
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	F4-1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Shaft horizontal or rotor on bottom
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC circuit feedback</b>	According to EN 61000-3-2/3
<b>EMC interference emission</b>	According to EN 61000-6-4 (industrial environment)
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>With cable</b>	Variable
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	EAC



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for full nozzle

## Product drawing

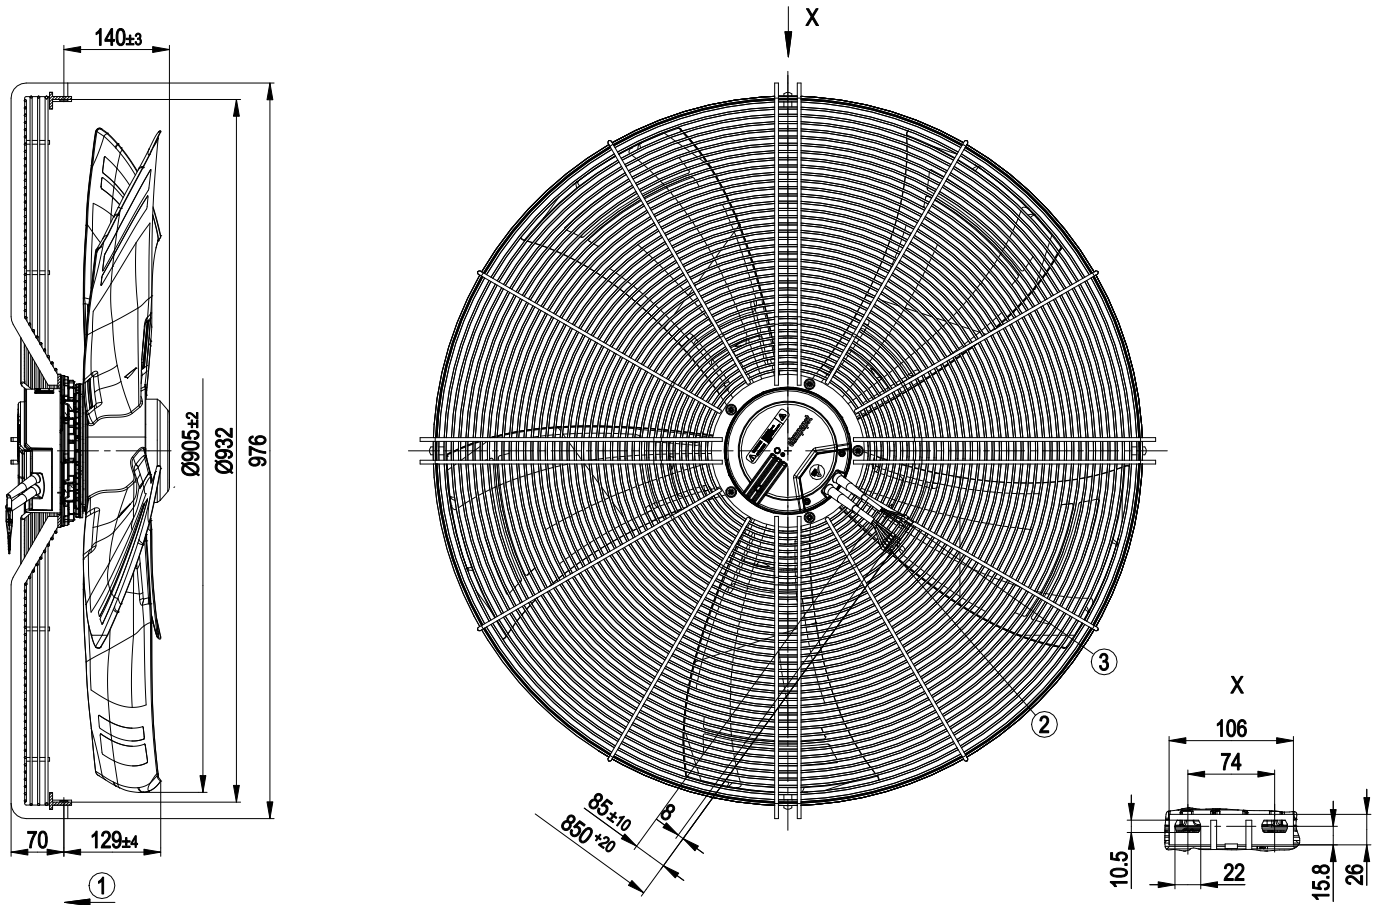


1	Direction of air flow "V"
2	Cable PVC AWG18, 6x crimped ferrules
3	Cable PVC AWG22, 3x crimped ferrules



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for full nozzle

## Connection diagram

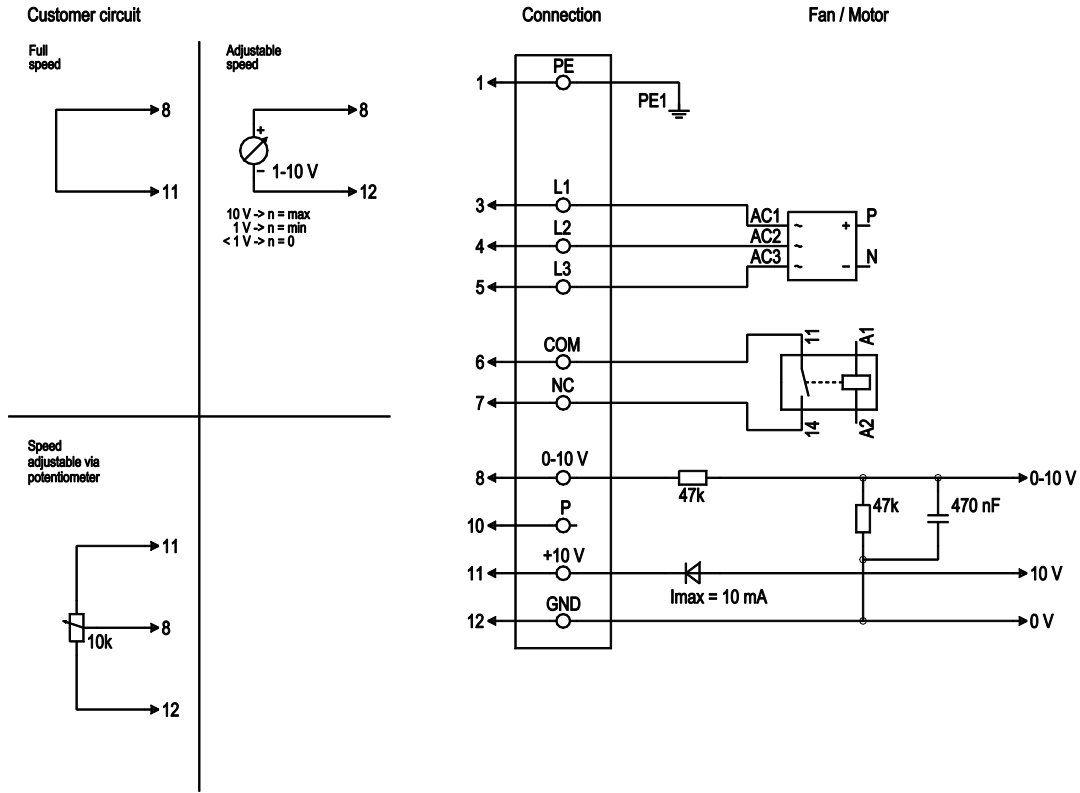


No.	Conn.	Designation	Color	Function/assignment
1	1	PE	green/yellow	Protective earth
1	3	L1	black	Power supply 50/60 Hz
1	4	L2	black	Power supply 50/60 Hz
1	5	L3	black	Power supply 50/60 Hz
1	6	COM	white 1	Floating status contact, break for failure (2 A, max. 250 VAC, min. 10 mA, AC1)
1	7	NC	white 2	Floating status contact, break for failure
2	8	0-10 V	yellow	Control input, set value 0-10 VDC, impedance 100 kΩ, SELV
2	10	P	orange	Do not use
2	11	+10 V	red	Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
2	12	GND	blue	Reference ground for control interface, SELV



# EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with guard grille for full nozzle

## Curves: Air performance 50 Hz

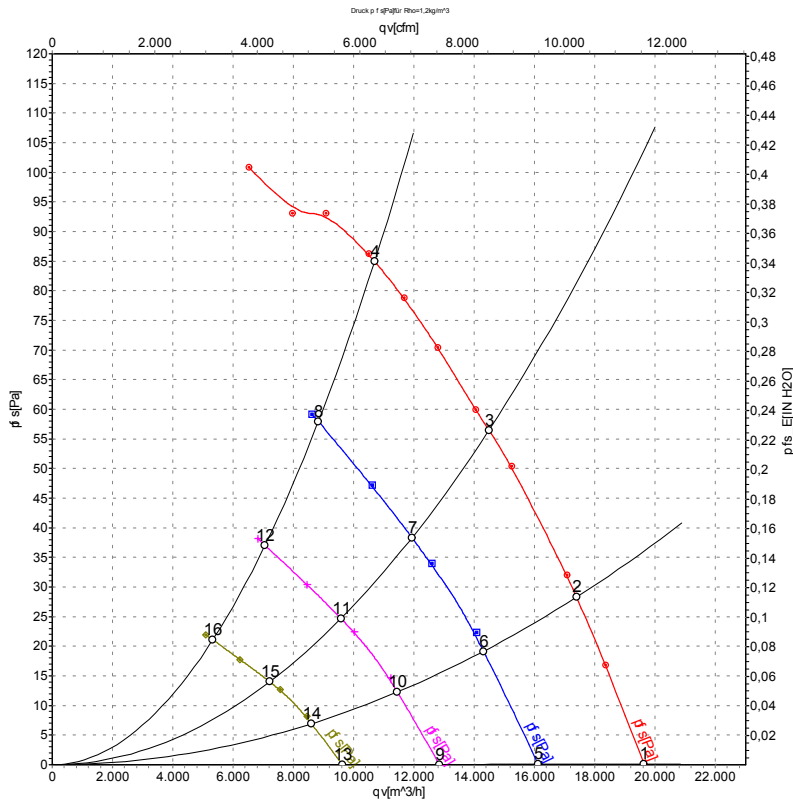

Measurement: LU-120677-1  
Measurement: LU-120687-1  
Measurement: LU-120688-1  
Measurement: LU-120689-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	P <sub>fs</sub>	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	CFM	inH2O
1	400	50	610	380	0.69	60	68	67	19630	0	11555	0.00
2	400	50	610	463	0.77	59	66	65	17390	28	10235	0.11
3	400	50	610	541	0.89	58	66	65	14480	56	8525	0.22
4	400	50	610	625	1.10	62	70	70	10690	85	6290	0.34
5	400	50	505	213	0.43	56	62	61	16120	0	9490	0.00
6	400	50	505	259	0.51	55	61	60	14300	20	8415	0.08
7	400	50	505	300	0.57	55	61	60	11930	38	7020	0.15
8	400	50	505	340	0.63	56	63	63	8825	58	5195	0.23
9	400	50	405	120	0.28	50	56	56	12830	0	7550	0.00
10	400	50	405	143	0.32	52	56	55	11440	13	6735	0.05
11	400	50	405	165	0.35	50	55	54	9575	25	5635	0.10
12	400	50	405	185	0.38	50	57	57	7060	37	4155	0.15
13	400	50	305	63	0.18	41	47	47	9625	0	5665	0.00
14	400	50	305	71	0.20	43	49	49	8595	7	5060	0.03
15	400	50	305	80	0.21	42	48	48	7215	14	4245	0.06
16	400	50	305	89	0.22	42	48	49	5325	21	3135	0.08

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

