

# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

S4D350-BN08-56 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                               |                   |      |      |      |
|-------------------------------|-------------------|------|------|------|
| Type                          | S4D350-BN08-56    |      |      |      |
| Motor                         | M4D074-DF         |      |      |      |
| Phase                         |                   | 3~   | 3~   | 3~   |
| Nominal voltage               | VAC               | 400  | 400  | 460  |
| Connection                    |                   | Y    | Y    | Y    |
| Frequency                     | Hz                | 50   | 60   | 60   |
| Type of data definition       |                   | ml   | ml   | ml   |
| Valid for approval / standard |                   | CE   | CE   | CE   |
| Speed (rpm)                   | min <sup>-1</sup> | 1370 | 1520 | 1600 |
| Power input                   | W                 | 170  | 230  | 255  |
| Current draw                  | A                 | 0.37 | 0.40 | 0.42 |
| Max. back pressure            | Pa                | 90   | 90   | 110  |
| Min. ambient temperature      | °C                | -25  | -25  | -25  |
| Max. ambient temperature      | °C                | 65   | 55   | 55   |
| Starting current              | A                 | 1.1  | 1.1  | 1.22 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 28.7   | 28.6         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 40.1   | 40           |
| 05 Variable speed drive           |   | No     |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power input $P_e$          | kW                | 0.16 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 2105 |
| 09 Pressure increase $p_{fs}$ | Pa                | 82   |
| 10 Speed (rpm) $n$            | min <sup>-1</sup> | 1375 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_g / 100\,000\text{ Pa}$

LU-131044



# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Technical features


|                                                                    |                                                                 |
|--------------------------------------------------------------------|-----------------------------------------------------------------|
| Mass                                                               | 4.1 kg                                                          |
| Size                                                               | 350 mm                                                          |
| Surface of rotor                                                   | Coated in black                                                 |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic         |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                        |
| Number of blades                                                   | 5                                                               |
| Direction of air flow                                              | "V"                                                             |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                |
| Type of protection                                                 | IP 44; Depending on installation and position as per EN 60034-5 |
| Insulation class                                                   | "F"                                                             |
| Humidity (F)/environmental protection class (H)                    | F2-2                                                            |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                         |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                         |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request    |
| Condensate discharge holes                                         | Rotor-side                                                      |
| Operation mode                                                     | S1                                                              |
| Motor bearing                                                      | Ball bearing                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                                       |
| Electrical leads                                                   | Via terminal box                                                |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally               |
| Cable exit                                                         | Variable                                                        |
| Protection class                                                   | I (if protective earth is connected by customer)                |
| Product conforming to standard                                     | EN 60335-1; CE                                                  |
| Approval                                                           | UL 1004-1; CSA C22.2 No.100                                     |



# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Product drawing

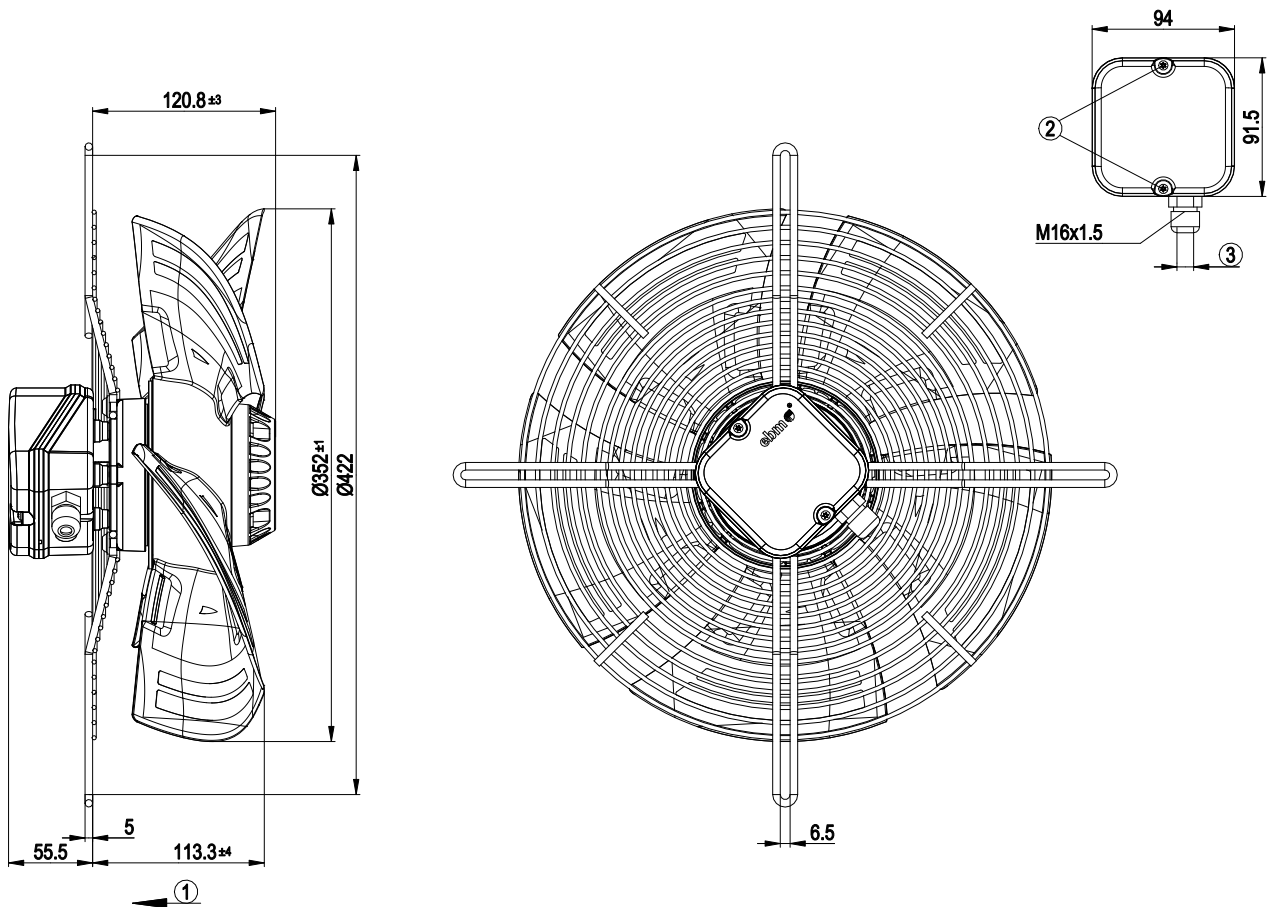


|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Direction of air flow "V"                                      |
| 2 | Tightening torque $0.5 \pm 0.1$ Nm                             |
| 3 | Cable diameter max. 7.5 mm, tightening torque $1.3 \pm 0.2$ Nm |

# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Connection screen




|    |              |    |      |    |       |
|----|--------------|----|------|----|-------|
| L1 | black        | L2 | blue | L3 | brown |
| PE | green/yellow |    |      |    |       |



# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Charts: Air flow 50 Hz

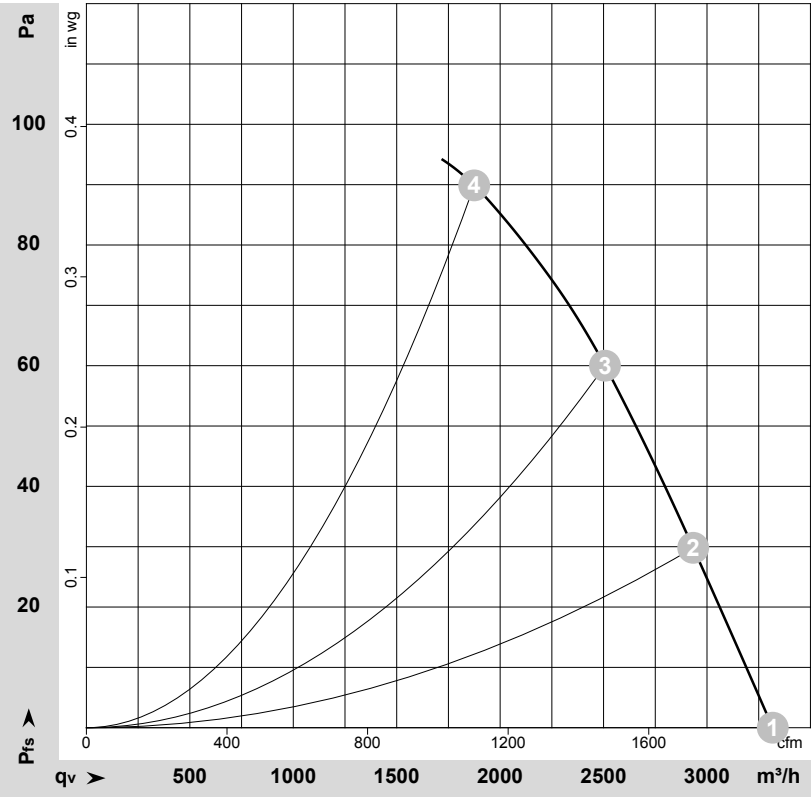

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-131044-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|--------------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | Y     | 400 | 50 | 1405              | 136            | 0.34 | 61                | 69                | 3320              | 0               | 1955           | 0.00               |
| 2 | Y     | 400 | 50 | 1395              | 148            | 0.35 | 59                | 66                | 2935              | 30              | 1725           | 0.12               |
| 3 | Y     | 400 | 50 | 1380              | 158            | 0.35 | 56                | 64                | 2505              | 60              | 1475           | 0.24               |
| 4 | Y     | 400 | 50 | 1370              | 170            | 0.37 | 56                | 64                | 1875              | 90              | 1105           | 0.36               |


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



# AC axial fan

sickled blades (S series), single inlet  
with guard grille for full nozzle

## Charts: Air flow 60 Hz

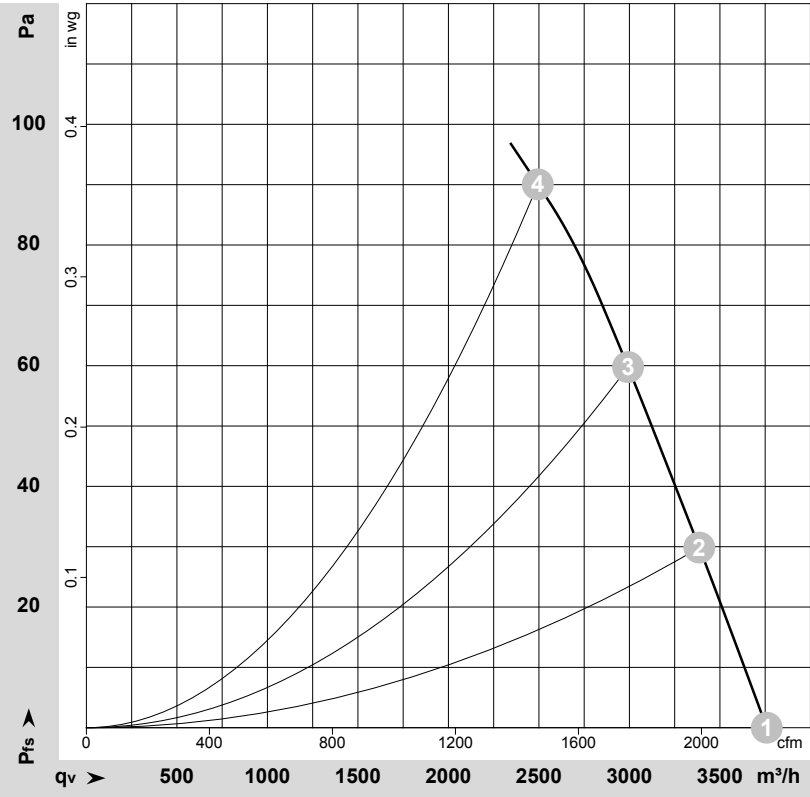

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-131047-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|--------------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | Y     | 400 | 60 | 1595              | 184            | 0.33 | 64                | 72                | 3760              | 0               | 2210           | 0.00               |
| 2 | Y     | 400 | 60 | 1575              | 200            | 0.35 | 62                | 69                | 3385              | 30              | 1995           | 0.12               |
| 3 | Y     | 400 | 60 | 1550              | 215            | 0.37 | 60                | 67                | 2995              | 60              | 1760           | 0.24               |
| 4 | Y     | 400 | 60 | 1520              | 230            | 0.40 | 58                | 66                | 2495              | 90              | 1470           | 0.36               |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

