

S4D400-AP16-74

AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle



S4D400-AP16-74 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRB 590142



Nominal data

Type	S4D400-AP16-74				
Motor	M4D074-EI				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	400	400
Wiring		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Method of obtaining data		fa	fa	fa	fa
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1440	1300	1670	1360
Power consumption	W	170	115	210	160
Current draw	A	0.53	0.21	0.44	0.27
Max. back pressure	Pa	150	100	120	60
Max. back pressure	inH2O	0.6	0.4	0.48	0.24
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	55	85	65	70

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015		
01 Overall efficiency η_{es}	%	31.6	29.5	09 Power consumption P_e	kW 0.22
02 Measurement category		A		09 Air flow q_v	m ³ /h 2610
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa 100
04 Efficiency grade N		42.1	40	10 Speed (rpm) n	min ⁻¹ 1400
05 Variable speed drive		No		11 Specific ratio*	1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-43060



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Technical description


Weight	4.9 kg
Fan size	400 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Guard grille material	Steel, coated with pure-white plastic (RAL 9010)
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On stator side
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Product drawing

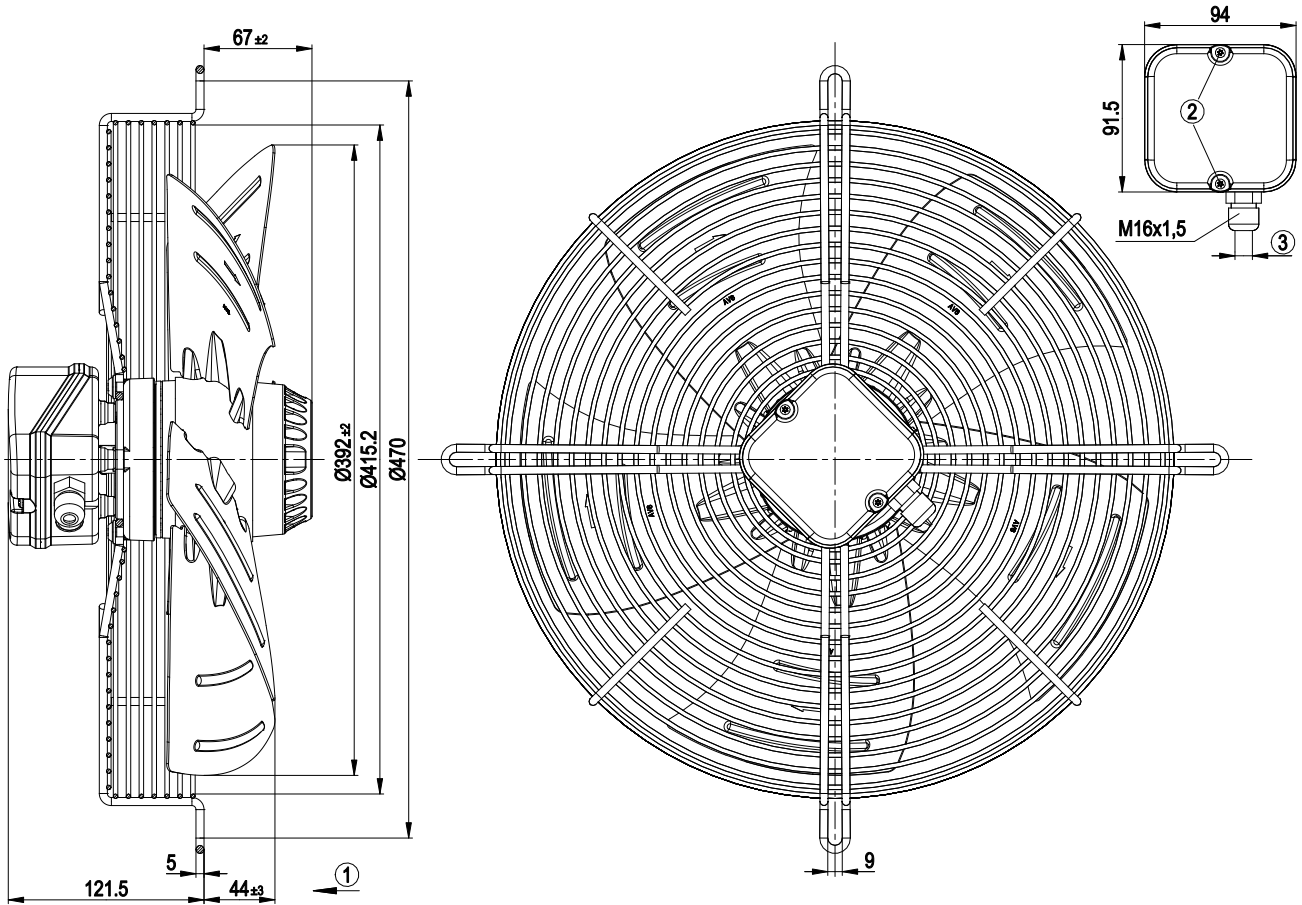

1	Direction of air flow "V"
2	Tightening torque 0.5 ± 0.1 Nm
3	Cable diameter: max. 7.5 mm, tightening torque 1.3±0.2 Nm



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Connection diagram




Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 50 Hz

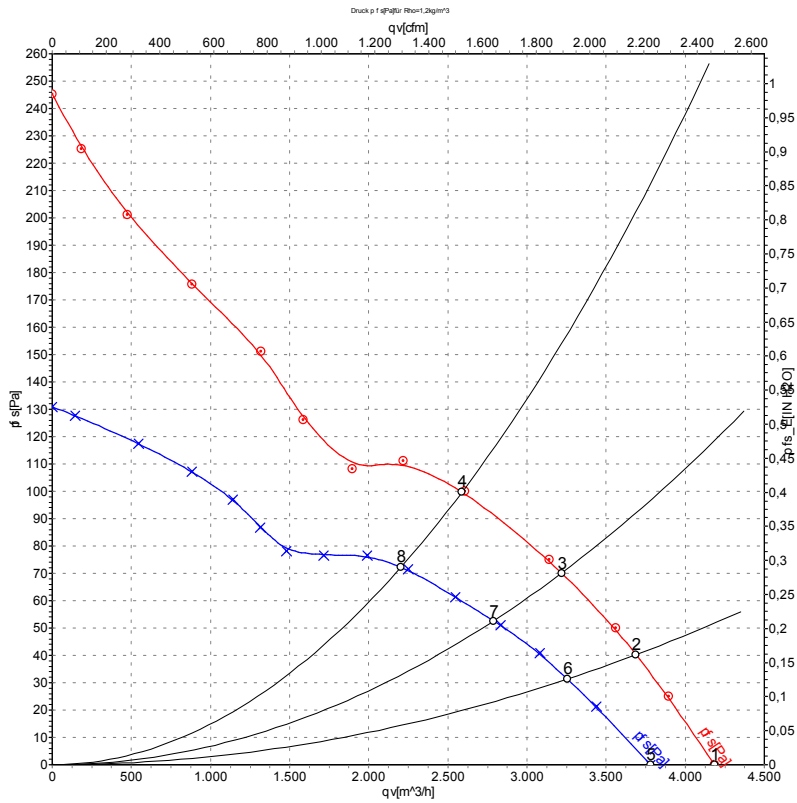

Measurement: LU-43060-1
Measurement: LU-51669-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	Δ	400	50	1440	170	0.53	4185	0	2465	0.00
2	Δ	400	50	1425	192	0.51	3690	40	2170	0.16
3	Δ	400	50	1415	211	0.51	3220	70	1895	0.28
4	Δ	400	50	1400	229	0.53	2590	100	1525	0.40
5	Y	400	50	1300	115	0.21	3780	0	2225	0.00
6	Y	400	50	1255	131	0.23	3255	31	1915	0.12
7	Y	400	50	1220	145	0.25	2790	53	1640	0.21
8	Y	400	50	1180	156	0.27	2205	72	1295	0.29


Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 60 Hz

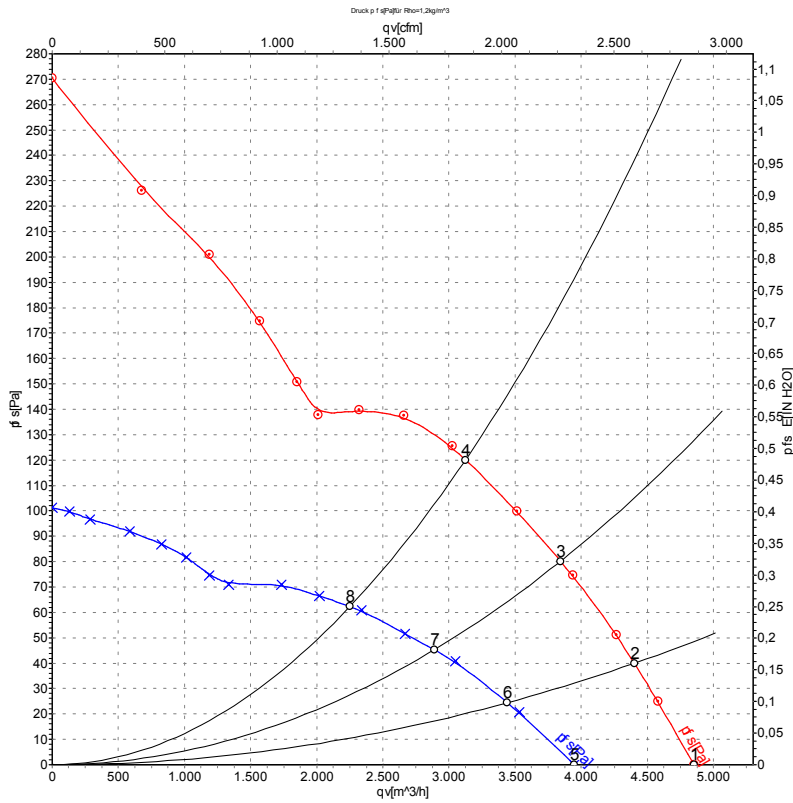

Measurement: LU-43061-1
Measurement: LU-51672-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	Δ	400	60	1670	210	0.44	4850	0	2855	0.00
2	Δ	400	60	1650	245	0.47	4400	40	2590	0.16
3	Δ	400	60	1625	279	0.51	3845	80	2260	0.32
4	Δ	400	60	1600	311	0.55	3125	120	1840	0.48
5	Y	400	60	1360	160	0.27	3950	0	2325	0.00
6	Y	400	60	1280	173	0.29	3440	25	2025	0.10
7	Y	400	60	1205	185	0.32	2890	45	1700	0.18
8	Y	400	60	1135	195	0.33	2250	62	1325	0.25

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

