

AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

S4D450-AU07-37 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| Type | S4D450-AU07-37 | | | | |
|-----------------------------|-------------------|----------|----------|------|------|
| Motor | M4D094-EA | | | | |
| Phase | | 3~ | 3~ | 3~ | 3~ |
| Nominal voltage | VAC | 230 | 230 | 400 | 400 |
| Wiring | | Δ | Δ | Y | Y |
| Frequency | Hz | 50 | 60 | 50 | 60 |
| Method of obtaining data | | ml | ml | ml | ml |
| Valid for approval/standard | | CE | CE | CE | CE |
| Speed (rpm) | min ⁻¹ | 1260 | 1300 | 1260 | 1300 |
| Power consumption | W | 255 | 355 | 255 | 355 |
| Current draw | A | 0.8 | 1.04 | 0.46 | 0.6 |
| Max. back pressure | Pa | 45 | 50 | 45 | 50 |
| Max. back pressure | in. wg | 0.18 | 0.2 | 0.18 | 0.2 |
| Min. ambient temperature | °C | -40 | -40 | -40 | -40 |
| Max. ambient temperature | °C | 60 | 50 | 60 | 50 |
| Starting current | A | 2.35 | 2.7 | 1.35 | 1.6 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

| | | Actual | Req. 2015 | | | |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency η_{es} | % | 30.4 | 30.2 | 09 Power consumption P_e | kW | 0.27 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h | 3500 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa | 92 |
| 04 Efficiency grade N | | 40.2 | 40 | 10 Speed (rpm) n | min ⁻¹ | 1240 |
| 05 Variable speed drive | | No | | 11 Specific ratio* | | 1.00 |

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-199695



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Technical description


| | |
|--|--|
| Weight | 7.3 kg |
| Size | 450 mm |
| Motor size | 94 |
| Rotor surface | Painted black |
| Terminal box material | PP plastic |
| Blade material | Press-fitted sheet steel blank, sprayed with PP plastic |
| Guard grille material | Steel, coated with black plastic (RAL 9005) |
| Number of blades | 5 |
| Airflow direction | V |
| Direction of rotation | Counterclockwise, viewed toward rotor |
| Degree of protection | IP54 |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | H2 |
| Ambient temperature note | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings. |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | On rotor side |
| Mode | S1 |
| Motor bearing | Ball bearing |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Electrical hookup | Terminal box |
| Motor protection | Thermal overload protector (TOP) with basic insulation |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 60034-1 (2010); CE |
| Approval | EAC; UL 1004-1; CSA C22.2 No. 100 |



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Product drawing

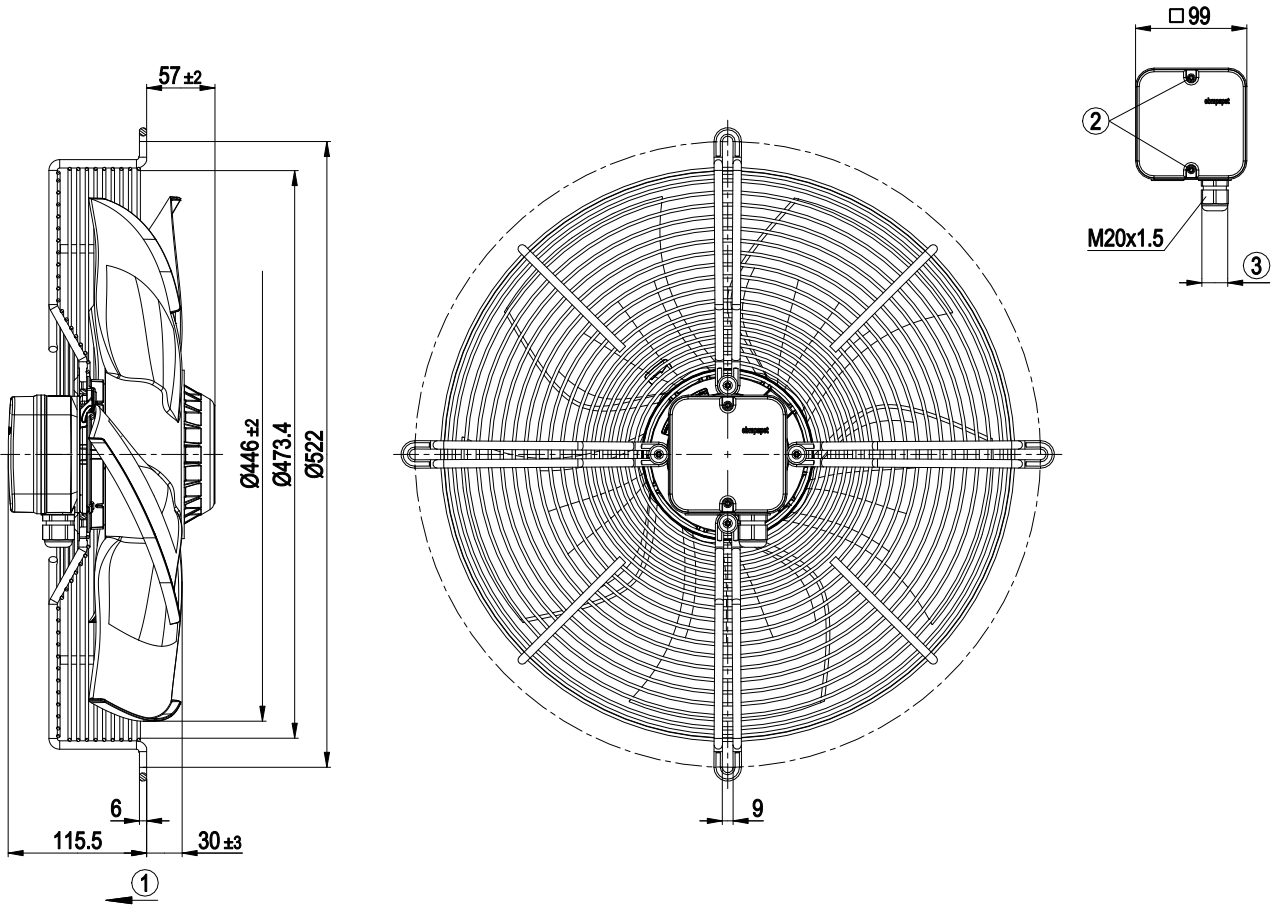

| | |
|---|--|
| 1 | Airflow direction "V" |
| 2 | Tightening torque 1.5 ± 0.2 Nm |
| 3 | Cable diameter min. 6 mm, max. 12 mm, tightening torque 2 ± 0.3 Nm |



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Connection diagram




| | | | | | |
|----|------------------|----|-----------------|-----|--------------|
| Δ | Delta connection | Y | Star connection | L1 | = U1 = black |
| L2 | = V1 = blue | L3 | = W1 = brown | W2 | yellow |
| U2 | green | V2 | white | TOP | 2x gray |
| PE | green/yellow | | | | |



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 50 Hz

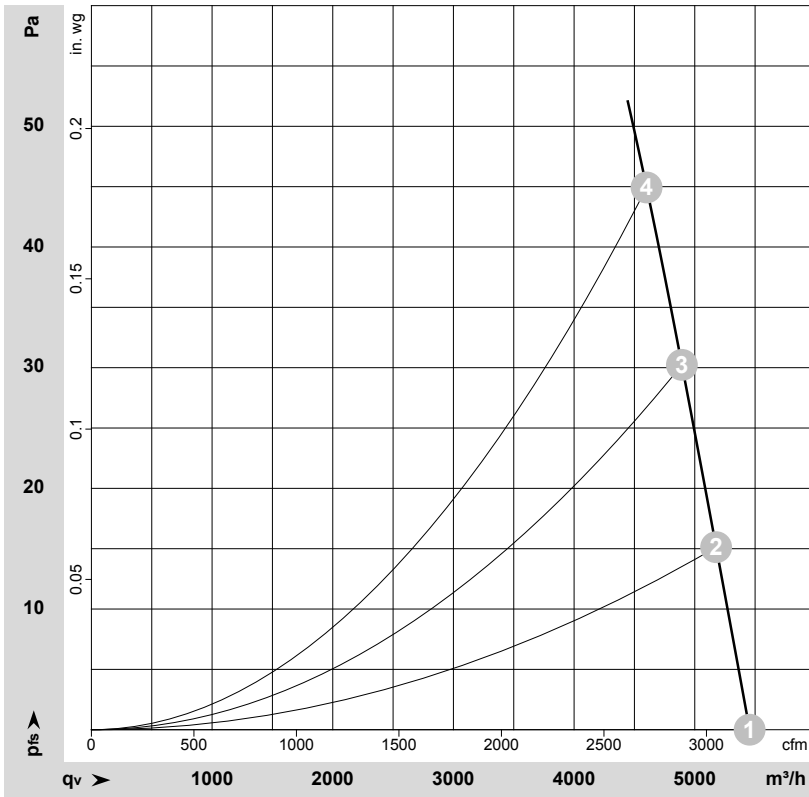

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-112597-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _e | I | LpA _{in} | LwA _{in} | q _v | P _{fs} | q _v | P _{fs} |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | Y | 400 | 50 | 1300 | 222 | 0.42 | 69 | 75 | 5455 | 0 | 3210 | 0.00 |
| 2 | Y | 400 | 50 | 1285 | 234 | 0.43 | 68 | 74 | 5175 | 15 | 3045 | 0.06 |
| 3 | Y | 400 | 50 | 1270 | 246 | 0.45 | 68 | 74 | 4895 | 30 | 2880 | 0.12 |
| 4 | Y | 400 | 50 | 1260 | 255 | 0.46 | 67 | 73 | 4600 | 45 | 2710 | 0.18 |


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase



AC axial fan

sickle-shaped blades (S series)
with guard grille for short nozzle

Curves: Air performance 60 Hz

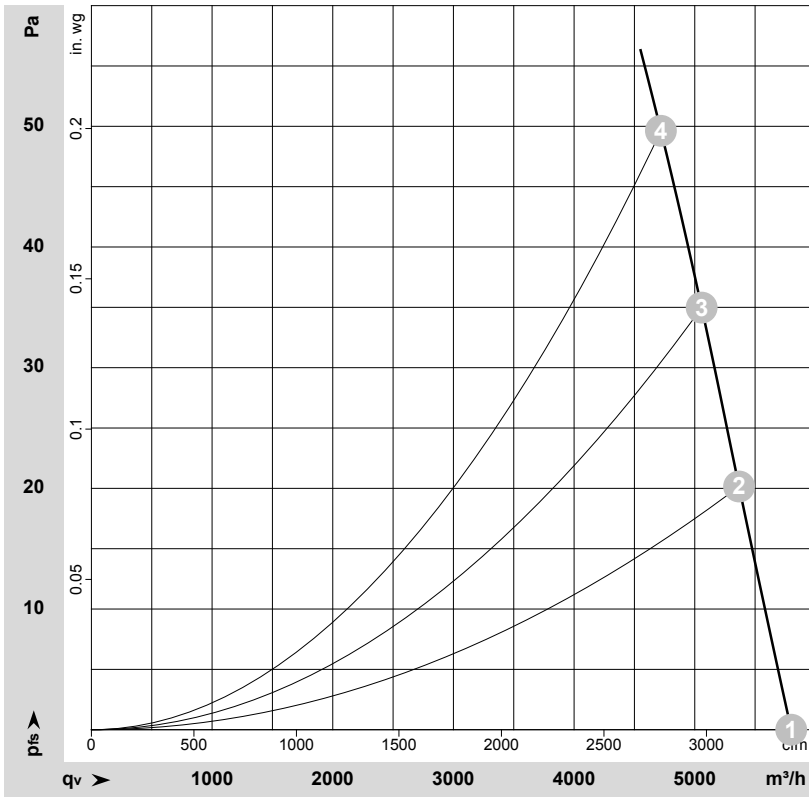

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-112598-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | Wired | U | f | n | P _e | I | q _v | P _{fs} | q _v | P _{fs} |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
| | | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa | cfm | in. wg |
| 1 | Y | 400 | 60 | 1380 | 315 | 0.52 | 5800 | 0 | 3415 | 0.00 |
| 2 | Y | 400 | 60 | 1340 | 333 | 0.55 | 5365 | 20 | 3160 | 0.08 |
| 3 | Y | 400 | 60 | 1315 | 345 | 0.57 | 5055 | 35 | 2975 | 0.14 |
| 4 | Y | 400 | 60 | 1300 | 355 | 0.60 | 4720 | 50 | 2775 | 0.20 |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

