

# AC axial fan

sickled blades (S series)  
with guard grille for short nozzle

S4E300-AP26-36 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                               |                   |      |      |
|-------------------------------|-------------------|------|------|
| Type                          | S4E300-AP26-36    |      |      |
| Motor                         | M4E068-CF         |      |      |
| Phase                         |                   | 1~   | 1~   |
| Nominal voltage               | VAC               | 230  | 230  |
| Frequency                     | Hz                | 50   | 60   |
| Type of data definition       |                   | fa   | fa   |
| Valid for approval / standard |                   | CE   | CE   |
| Speed                         | min <sup>-1</sup> | 1400 | 1630 |
| Power input                   | W                 | 68   | 92   |
| Current draw                  | A                 | 0.3  | 0.41 |
| Motor capacitor               | µF                | 2    | 2    |
| Capacitor voltage             | VDB               | 400  | 400  |
| Max. back pressure            | Pa                | 80   | 70   |
| Max. ambient temperature      | °C                | 60   | 45   |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



# AC axial fan

sickled blades (S series)  
with guard grille for short nozzle

## Technical features


|                                                         |                                                                   |
|---------------------------------------------------------|-------------------------------------------------------------------|
| Mass                                                    | 3.18 kg                                                           |
| Size                                                    | 300 mm                                                            |
| Surface of rotor                                        | Coated in black                                                   |
| Material of terminal box                                | ABS Plastic, black                                                |
| Material of blades                                      | Sheet steel, coated in black                                      |
| Material of guard grille                                | Steel, phosphated and coated in black plastic                     |
| Number of blades                                        | 7                                                                 |
| Direction of air flow                                   | "V"                                                               |
| Direction of rotation                                   | Counter-clockwise, seen on rotor                                  |
| Type of protection                                      | IP 44                                                             |
| Insulation class                                        | "B"                                                               |
| Humidity class                                          | F1-2                                                              |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C                                                           |
| Min. permissible ambient motor temp. (transp./storage)  | - 40 °C                                                           |
| Mounting position                                       | Shaft horizontal or rotor on bottom; rotor on top on request      |
| Condensate discharge holes                              | Rotor-side                                                        |
| Operation mode                                          | S1                                                                |
| Motor bearing                                           | Ball bearing with anti-freezing grease                            |
| Leakage current                                         | < 0.75 mA                                                         |
| Electrical leads                                        | Via terminal box, integrated capacitor connected via terminal box |
| Motor protection                                        | Thermal overload protector (TOP) wired internally                 |
| Cable exit                                              | Variable                                                          |
| Protection class                                        | I (if protective earth is connected by customer)                  |
| Product conforming to standard                          | EN 60335-1; CE                                                    |
| Approval                                                | CCC                                                               |



# AC axial fan

sickled blades (S series)  
with guard grille for short nozzle

## Product drawing

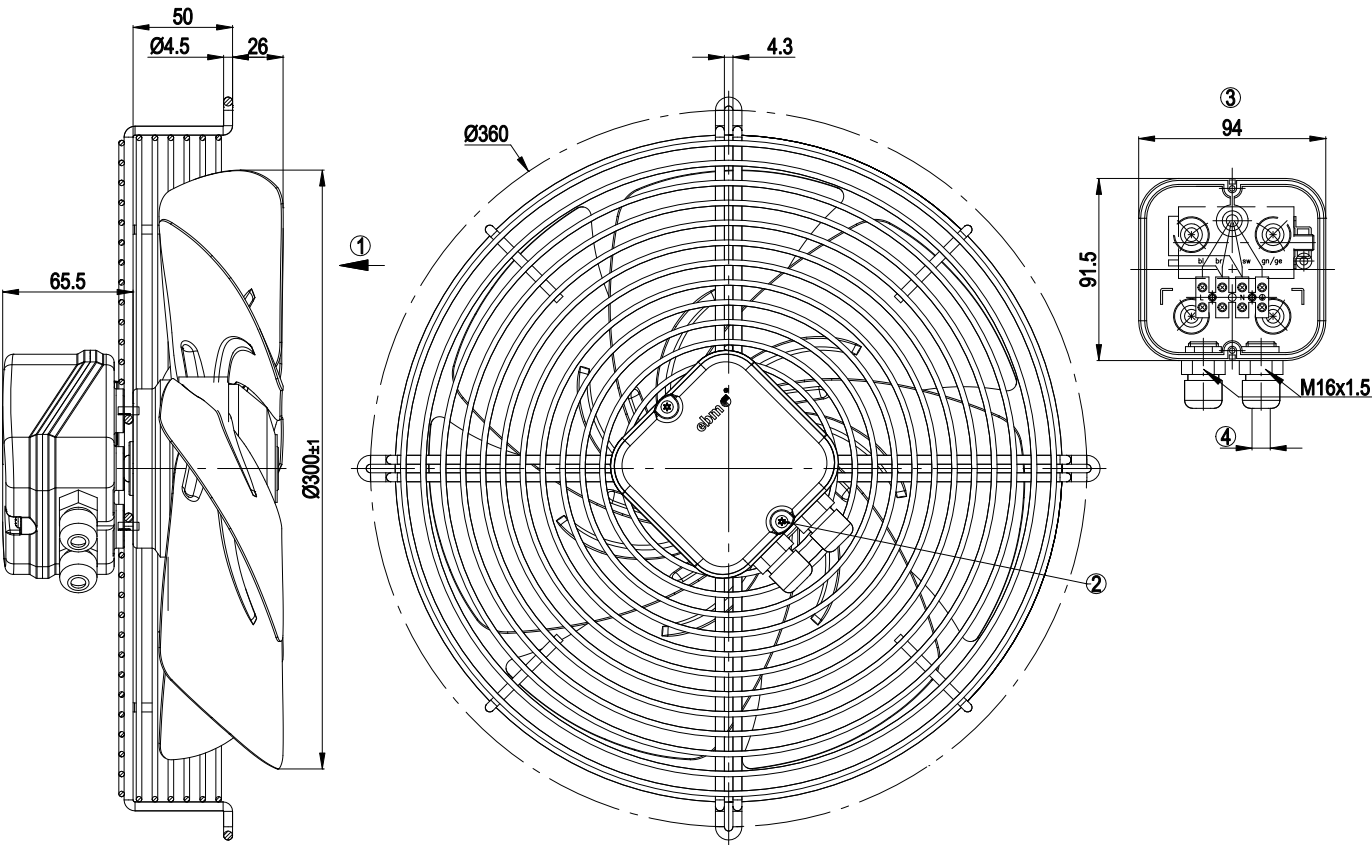


|   |                                                       |
|---|-------------------------------------------------------|
| 1 | Direction of air flow "V"                             |
| 2 | Tightening torque 0.7 Nm                              |
| 3 | Illustration without terminal box cover               |
| 4 | Cable diameter: max. 7.5 mm; tightening torque 1.3 Nm |



# AC axial fan

sickled blades (S series)  
with guard grille for short nozzle

Connection screen

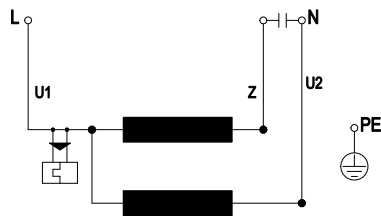

|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |




## AC axial fan

sickled blades (S series)

with guard grille for short nozzle

## Charts: Air flow 50 Hz

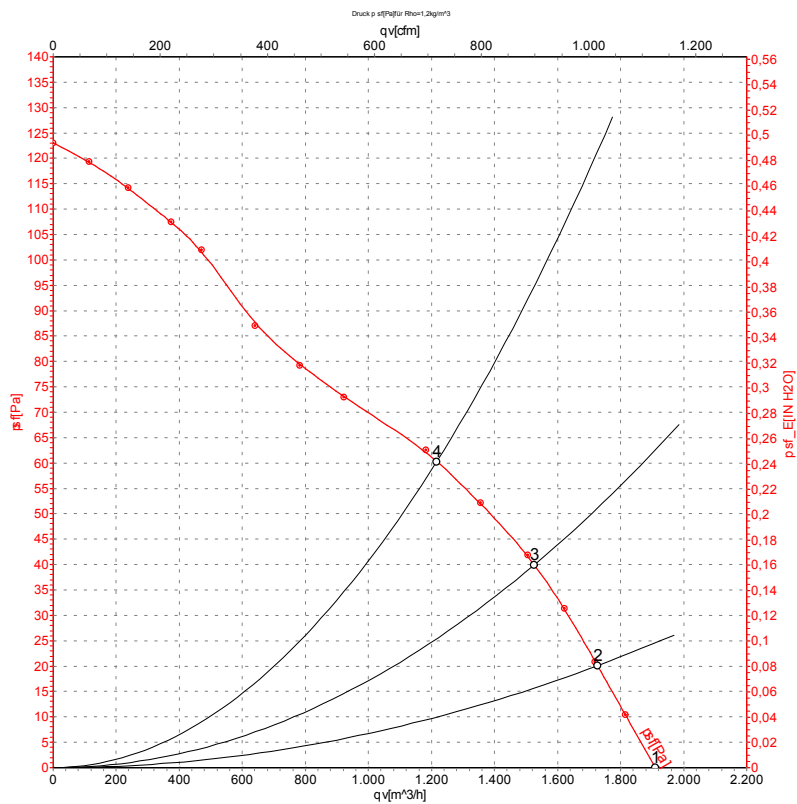

Measurement: LU-31732

Air performance measured as per ISO 5801  
 Installation category A. For detailed  
 information on the measuring set-up, please  
 contact ebm-papst. Suction-side noise  
 levels: L<sub>WA</sub> measured as per ISO 13347 /  
 L<sub>pA</sub> measured with 1m distance to fan axis.  
 The values given are valid under the  
 measuring conditions mentioned above and  
 may vary according to the actual installation  
 situation. With any deviation from the  
 standard set-up, the specific values have to  
 be checked and reviewed with the unit  
 installed.


## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv   | P <sub>st</sub> |
|---|-----|----|-------------------|----------------|------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | 230 | 50 | 1400              | 70             | 0.32 | 1910 | 0               |
| 2 | 230 | 50 | 1380              | 74             | 0.33 | 1725 | 20              |
| 3 | 230 | 50 | 1365              | 77             | 0.34 | 1525 | 40              |
| 4 | 230 | 50 | 1330              | 82             | 0.36 | 1215 | 60              |



AC axial fan  
sickled blades (S series)  
with guard grille for short nozzle

Charts: Air flow 60 Hz

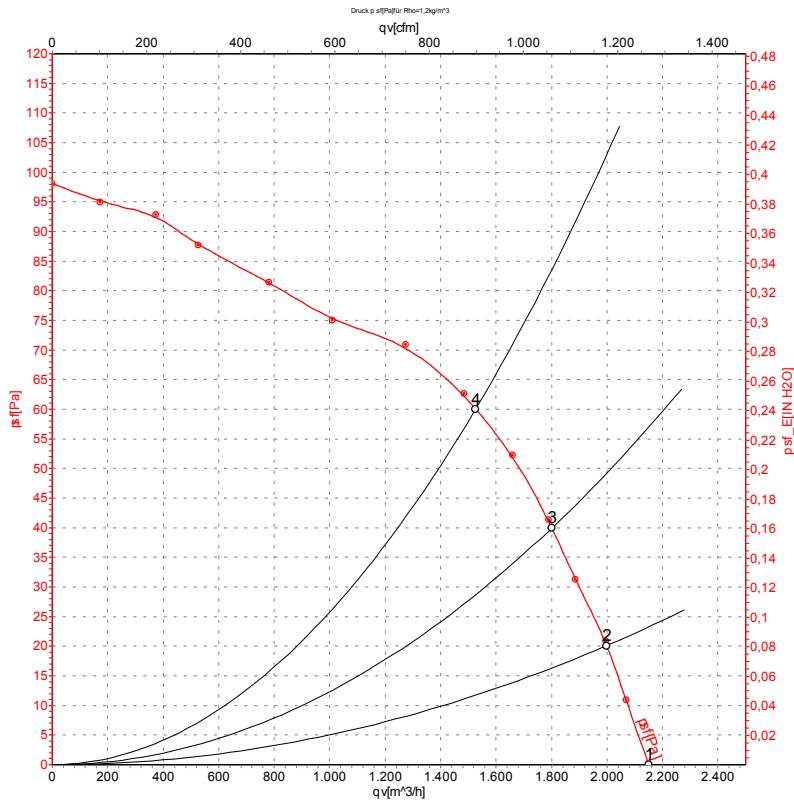

Measurement: LU-31733

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: L<sub>WA</sub> measured as per ISO 13347 /  
L<sub>pA</sub> measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qV   | p <sub>sf</sub> |
|---|-----|----|-------------------|----------------|------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | 230 | 60 | 1610              | 94             | 0.41 | 2150 | 0               |
| 2 | 230 | 60 | 1575              | 101            | 0.44 | 2000 | 20              |
| 3 | 230 | 60 | 1545              | 105            | 0.45 | 1800 | 40              |
| 4 | 230 | 60 | 1490              | 109            | 0.47 | 1525 | 60              |

