

# AC axial fan

straight blades (A series), single inlet  
with guard grille for short nozzle

S4E315-AC08-07 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

<b>Type</b>	<b>S4E315-AC08-07</b>		
<b>Motor</b>	<b>M4E068-DF</b>		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		fa	fa
Valid for approval / standard		CE	CE
Speed	min <sup>-1</sup>	1370	1530
Power input	W	95	135
Current draw	A	0.42	0.6
Motor capacitor	µF	3	3
Capacitor voltage	VDB	400	400
Max. back pressure	Pa	75	65
Max. ambient temperature	°C	40	40

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



# AC axial fan

straight blades (A series), single inlet  
with guard grille for short nozzle

## Technical features


<b>Mass</b>	3.7 kg
<b>Size</b>	315 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of blades</b>	Sheet steel, coated in black
<b>Number of blades</b>	5
<b>Direction of air flow</b>	"V"
<b>Direction of rotation</b>	Counter-clockwise, seen on rotor
<b>Type of protection</b>	IP 44
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F2-2
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 70 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensate discharge holes</b>	Rotor-side
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing with anti-freezing grease
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	< 0.75 mA
<b>Electrical leads</b>	Via terminal box, integrated capacitor connected via terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Cable exit</b>	Axial
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE
<b>Approval</b>	CCC



# AC axial fan


straight blades (A series), single inlet  
with guard grille for short nozzle

## Product drawing

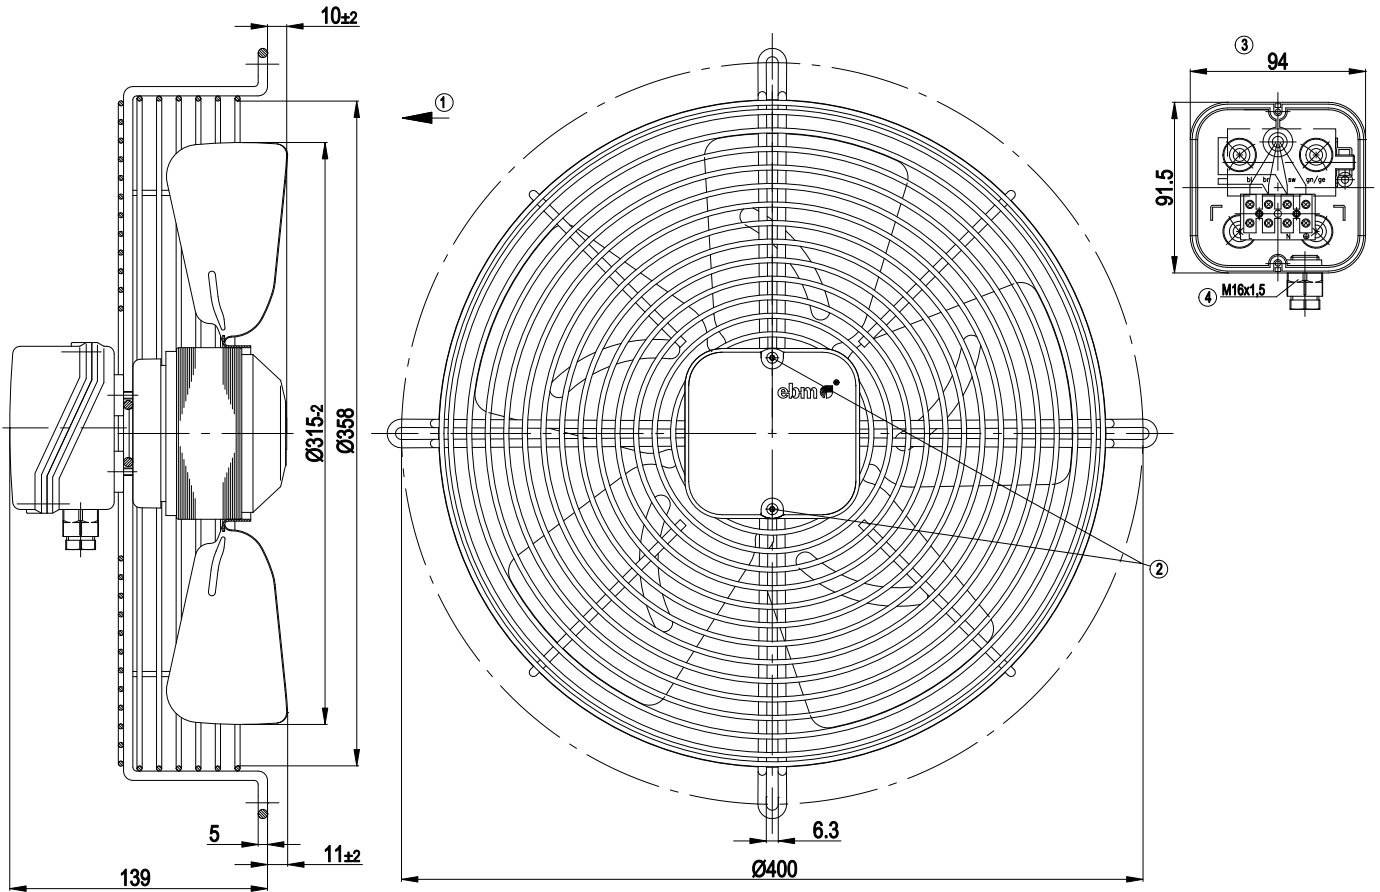

1	Direction of air flow "V"
2	Tightening torque $0.7 \text{ Nm} \pm 0.2 \text{ Nm}$
3	Illustration without terminal box cover
4	Cable diameter: min. 4 mm, max. 8 mm; tightening torque: $1.3 \text{ Nm} \pm 0.2 \text{ Nm}$

## Connection screen




L	= U1 = blue	Z	brown	N	= U2 = black
PE	green/yellow				



# AC axial fan

straight blades (A series), single inlet  
with guard grille for short nozzle

## Charts: Air flow 50 Hz

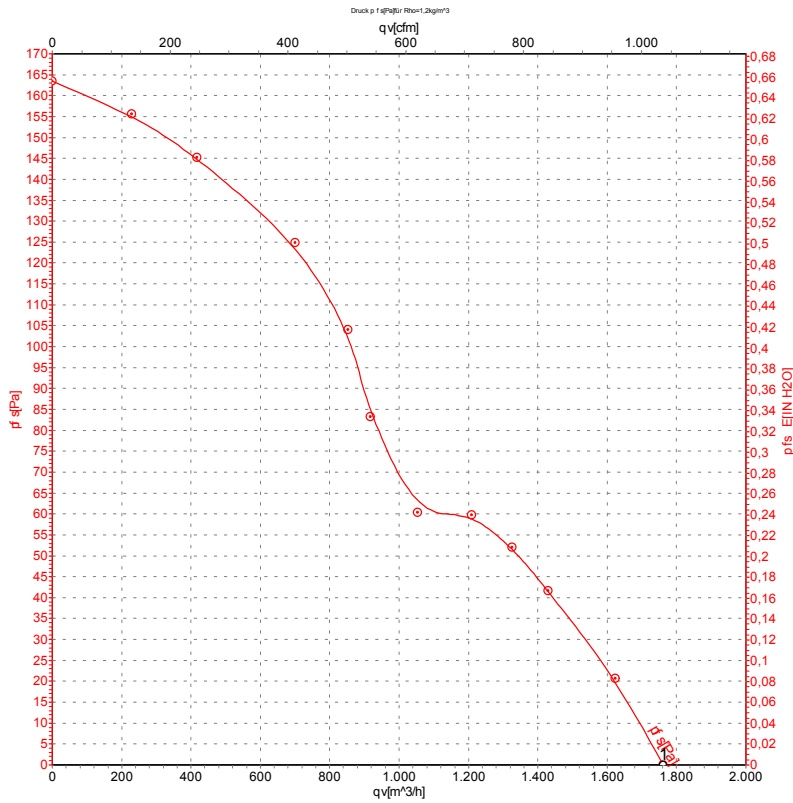

Measurement: LU-37061

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h
1	230	50	1370	95	0.42	1760


U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow



# AC axial fan

straight blades (A series), single inlet  
with guard grille for short nozzle

## Charts: Air flow 60 Hz

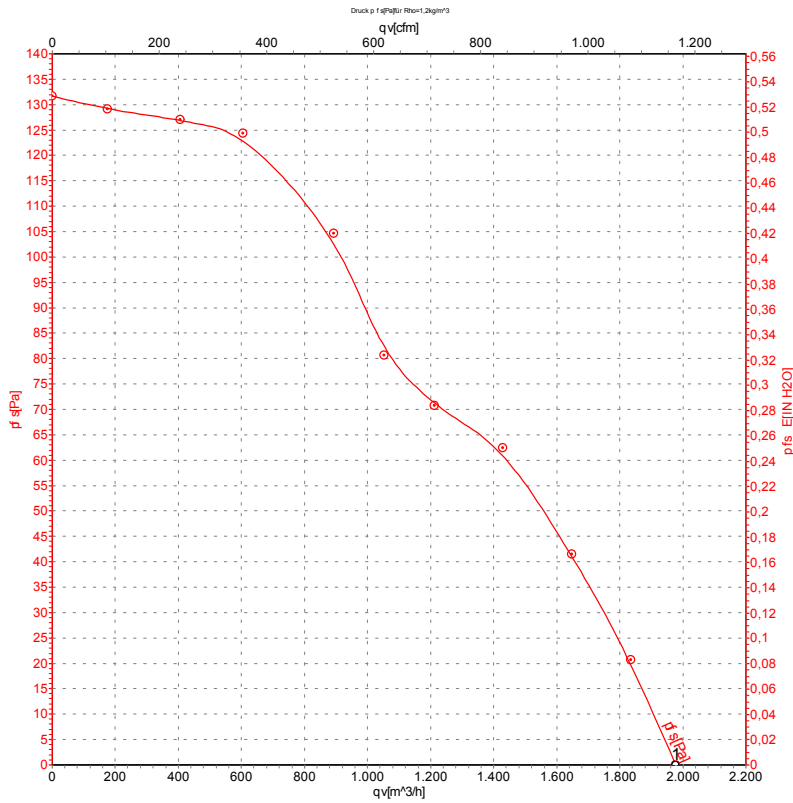

Measurement: LU-37062

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h
1	230	60	1530	135	0.60	1970

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow

