

AC axial fan

sickled blades (S series)
with guard grille for short nozzle

S4E500-AZ02-20 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S4E500-AZ02-20	
Motor	M4E094-HA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		ml
Valid for approval / standard		CE
Speed (rpm)	min ⁻¹	1330
Power input	W	660
Current draw	A	3.1
Motor capacitor	µF	10
Capacitor voltage	VDB	400
Capacitor standard		S0 (CE)
Max. back pressure	Pa	180
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	70
Starting current	A	7.3

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	33.5	32.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		41.3	40
05 Variable speed drive		No	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	0.58
09 Air flow q_v	m³/h	5005
09 Pressure increase p_{fs}	Pa	140
10 Speed (rpm) n	min ⁻¹	1370
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-162350



AC axial fan

sickled blades (S series)
with guard grille for short nozzle

Technical features

Mass	11.7 kg
Size	500 mm
Surface of rotor	Coated in black
Material of terminal box	ABS plastic, black
Material of blades	Aluminium sheet, coated in black
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-10°
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Electrical leads	Via terminal box, integrated capacitor connected via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Product conforming to standard	EN 60034-1 (2010); CE




AC axial fan

sickled blades (S series)

with guard grille for short nozzle

Product drawing

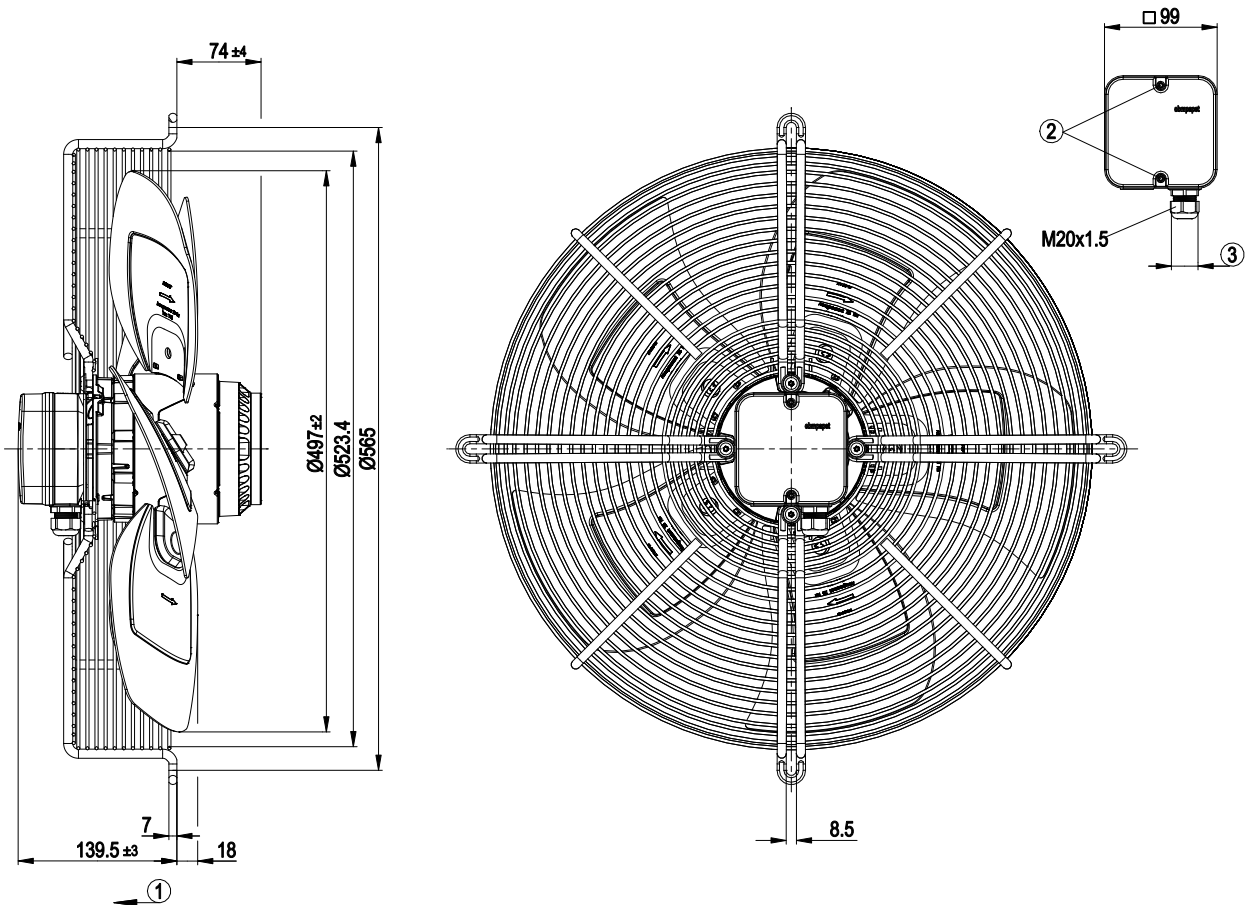


1	Direction of air flow "V"
2	Tightening torque 0.8Nm $\pm$ 0.15Nm
3	Cable diameter: min. 6 mm, max. 12 mm, tightening torque 2Nm $\pm$ 0.2Nm

AC axial fan

sickled blades (S series)
with guard grille for short nozzle

Connection screen




L	= U1 = blue	Z	brown	N	= U2 = black
PE	green / yellow	TOP	grey		



AC axial fan
sickled blades (S series)
with guard grille for short nozzle

Charts: Air flow 50 Hz

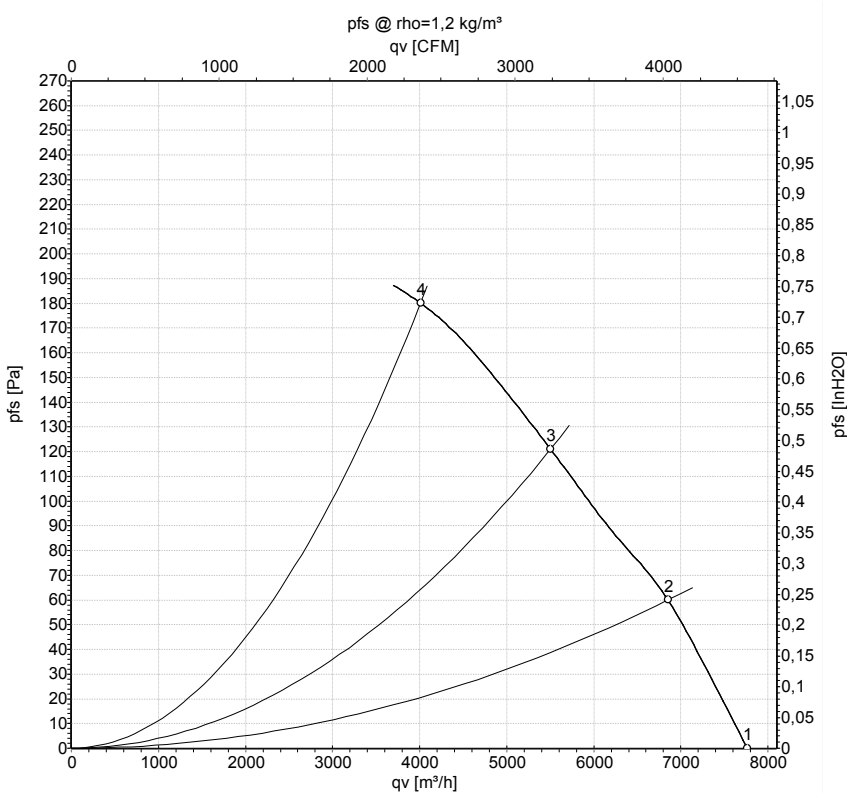

Measurement: LU-162350-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	230	50	1420	427	2.15	7765	0	4570	0.00
2	230	50	1395	496	2.42	6850	60	4035	0.24
3	230	50	1380	552	2.65	5505	120	3240	0.48
4	230	50	1330	660	3.10	4010	180	2360	0.72

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

