

# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

S6D500-AJ05-08 ebmpapst Datasheet FansCo

sales@fansco.com www.fansco.com

## Nominal data

<b>Type</b>	<b>S6D500-AJ05-08</b>				
<b>Motor</b>	<b>M6D110-EF</b>				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Wiring		$\Delta$	Y	$\Delta$	Y
Frequency	Hz	50	50	60	60
Method of obtaining data		ml	ml	ml	ml
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	920	785	1090	880
Power consumption	W	260	190	410	290
Current draw	A	0.63	0.32	0.72	0.41
Max. back pressure	Pa	70	50	95	62
Max. back pressure	inH <sub>2</sub> O	0.28	0.2	0.38	0.25
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	80	80	80	80
Starting current	A	2.2	0.73	2.4	0.8

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	29.9	29.9	09 Power consumption $P_e$	kW	0.25
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	4105
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	64
04 Efficiency grade N		40	40	10 Speed (rpm) n	min <sup>-1</sup>	925
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-140967



# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Technical description


<b>Weight</b>	10.7 kg
<b>Fan size</b>	500 mm
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	PP plastic
<b>Blade material</b>	Press-fitted sheet steel blank, sprayed with PP plastic
<b>Guard grille material</b>	Steel, coated with black plastic (RAL 9005)
<b>Number of blades</b>	5
<b>Airflow direction</b>	"A"
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP54
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	F4-1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Shaft horizontal or rotor on top; rotor on bottom on request
<b>Condensation drainage holes</b>	On stator side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Via terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) with basic insulation
<b>With cable</b>	Axial
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	VDE



# AC axial fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Product drawing

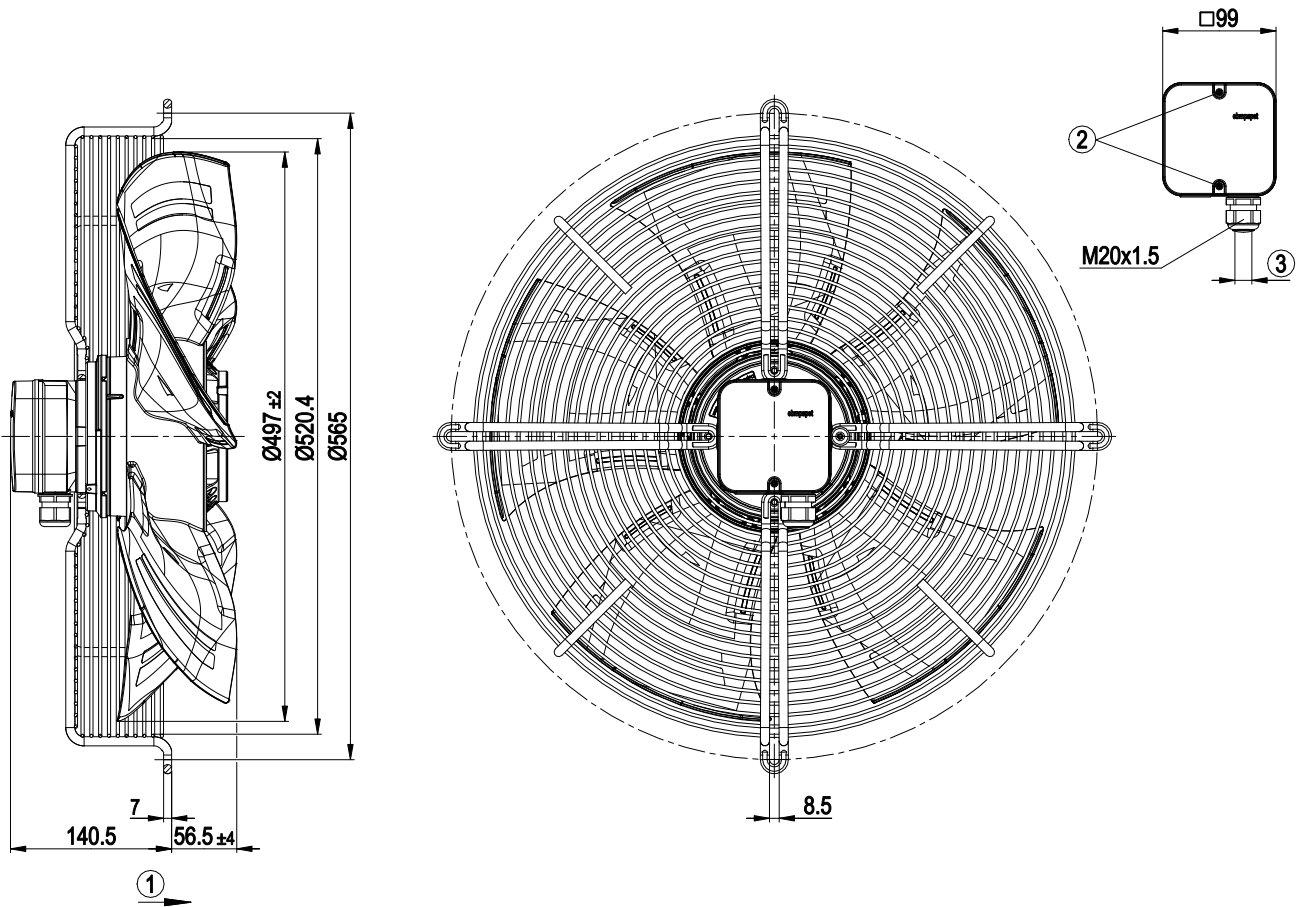


1	Direction of air flow "A"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 6 mm, max. 12 mm, tightening torque 2±0.3 Nm



# AC axial fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Connection diagram

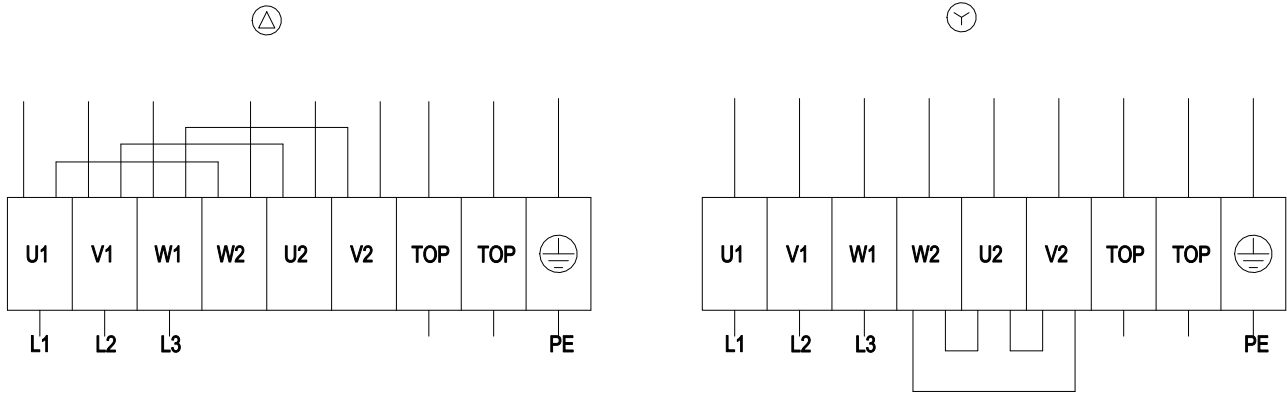


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				



# AC axial fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Curves: Air performance 50 Hz

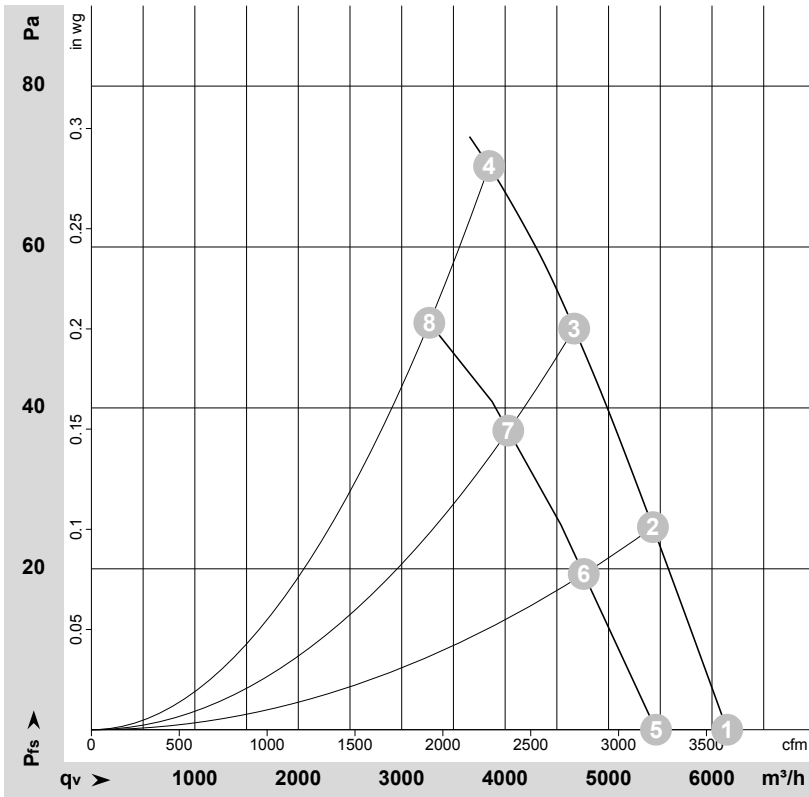

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-152524-1  
Measurement: LU-167953-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Δ	400	50	945	202	0.58	62	68	68	6145	0	3620	0.00
2	Δ	400	50	940	225	0.59	59	66	65	5430	25	3195	0.10
3	Δ	400	50	930	245	0.60	56	63	63	4670	50	2745	0.20
4	Δ	400	50	920	260	0.63	55	62	62	3845	70	2265	0.28
5	Y	400	50	845	148	0.26	59	66	65	5460	0	3215	0.00
6	Y	400	50	820	163	0.28	56	63	62	4760	19	2800	0.08
7	Y	400	50	800	175	0.30	53	60	60	4030	37	2370	0.15
8	Y	400	50	785	190	0.32	51	58	57	3265	51	1925	0.20

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Curves: Air performance 60 Hz

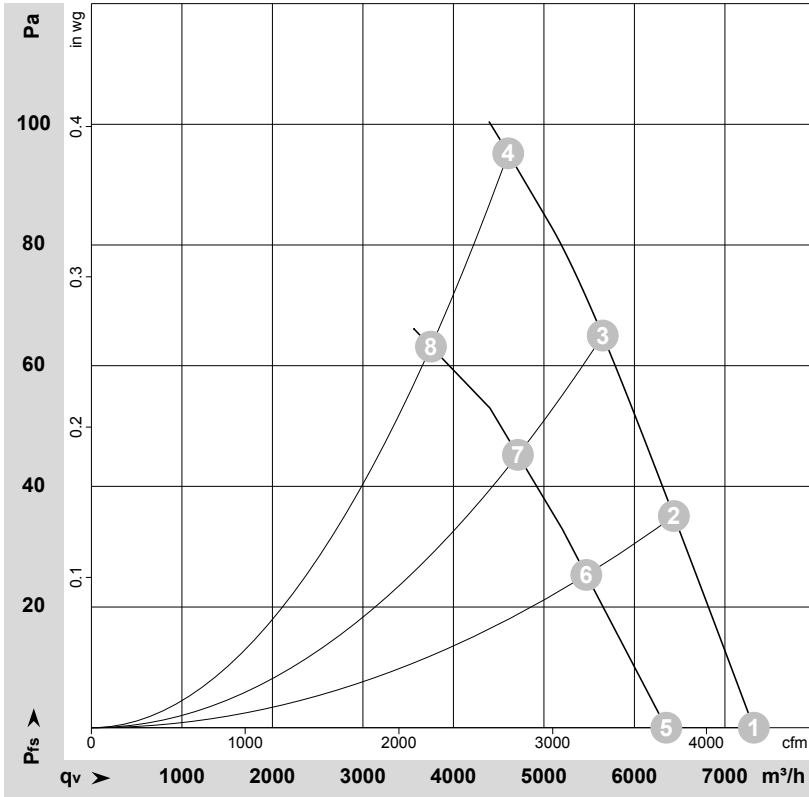

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-152527-1  
Measurement: LU-167955-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Δ	480	60	1120	314	0.62	65	72	71	7320	0	4310	0.00
2	Δ	480	60	1110	350	0.65	62	69	69	6435	35	3790	0.14
3	Δ	480	60	1100	378	0.67	60	67	67	5650	65	3325	0.26
4	Δ	480	60	1090	410	0.72	59	66	66	4605	95	2710	0.38
5	Y	480	60	975	234	0.33	62	69	68	6350	0	3740	0.00
6	Y	480	60	940	257	0.36	59	65	65	5470	25	3220	0.10
7	Y	480	60	915	272	0.38	56	63	63	4715	45	2775	0.18
8	Y	480	60	880	290	0.41	54	61	61	3750	63	2210	0.25

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

