

AC axial fan

sickled blades (S series)

with guard grille for short nozzle

S6D630-AE05-14 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	S6D630-AE05-14								
Motor	M6D110-GF								
Phase		3~	3~	3~	3~	3~	3~	3~	3~
Nominal voltage	VAC	208	230	230	277	360	400	400	480
Connection		Δ	Δ	Δ	Δ	Y	Y	Y	Y
Frequency	Hz	60	50	60	60	60	50	60	60
Type of data definition		cu	ml	ml	ml	cu	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE	CE	CE	CE	CE
Speed	min ⁻¹	920	900	1025	1080	920	900	1025	1080
Power input	W	810	640	770	850	810	640	770	850
Current draw	A	4.78	2.46	2.52	2.6	2.76	1.42	1.45	1.5
Max. back pressure	Pa	80	110	50	55	80	110	50	55
Min. ambient temperature	°C	-40	-40	-40	-40	-40	-40	-40	-40
Max. ambient temperature	°C	50	55	55	55	50	55	55	55
Starting current	A	5.8	7.2	6.45		3.3	4.3	3.9	
Maximum safe operating speed	min ⁻¹	1360	1360	1360	1360	1360	1360	1360	1360

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	32.3	28.3	32.3
Efficiency grade N		40	36	40
Power input P_e	kW	0.6		
Air flow q_v	m ³ /h	7020		
Pressure increase p_{fs}	Pa	99		
Speed n	min ⁻¹	905		

Data definition with optimum efficiency. LU-100747
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



AC axial fan

sickled blades (S series)
with guard grille for short nozzle

Technical features


Mass	14.9 kg
Size	630 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PC / ABS plastic
Material of blades	Aluminium sheet
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-5°
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	VDE; UL 1004-1; CSA C22.2 Nr.100



AC axial fan

sickled blades (S series)
with guard grille for short nozzle

Product drawing

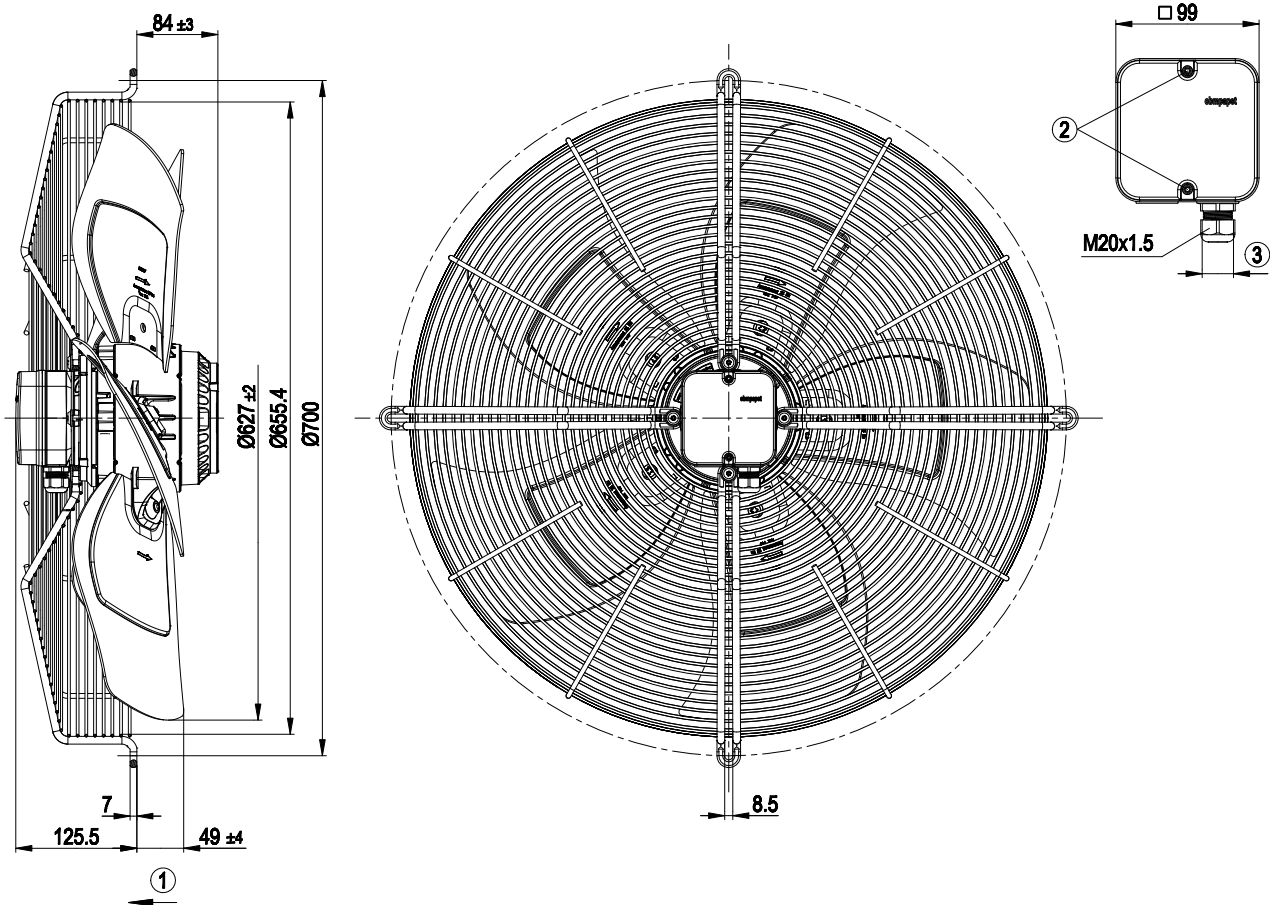


1	Direction of air flow "V"
2	Tightening torque 1.5±0.2 Nm
3	Cable diameter: min. 6 mm, max. 12 mm, tightening torque: 2±0.3 Nm



AC axial fan

sickled blades (S series)
with guard grille for short nozzle

Connection screen

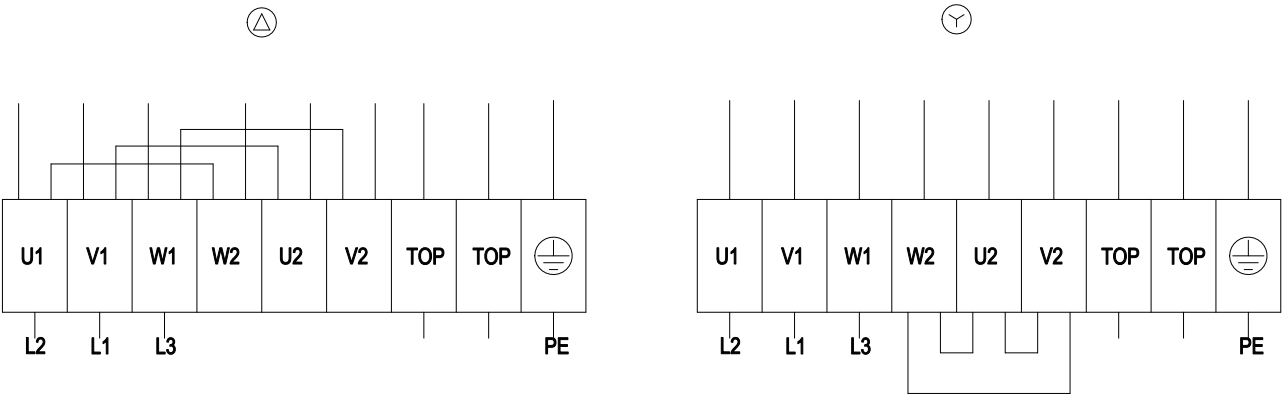


Δ	Delta connection	Y	Star connection	L1	= V1 = blue
L2	= U1 = black	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan
sickled blades (S series)
with guard grille for short nozzle

Charts: Air flow 50 Hz Y

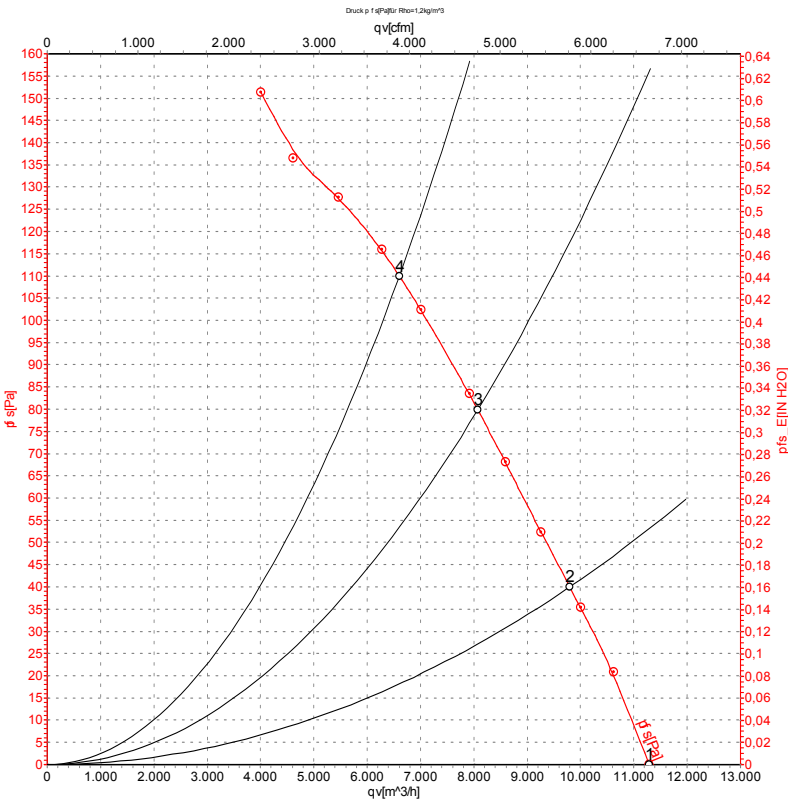

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	Y	400	50	935	471	1.29	71	77	11290	0
2	Y	400	50	920	534	1.33	69	76	9800	40
3	Y	400	50	910	580	1.36	70	77	8075	80
4	Y	400	50	900	640	1.42	71	78	6605	110

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series)
with guard grille for short nozzle

Charts: Air flow 60 Hz Y

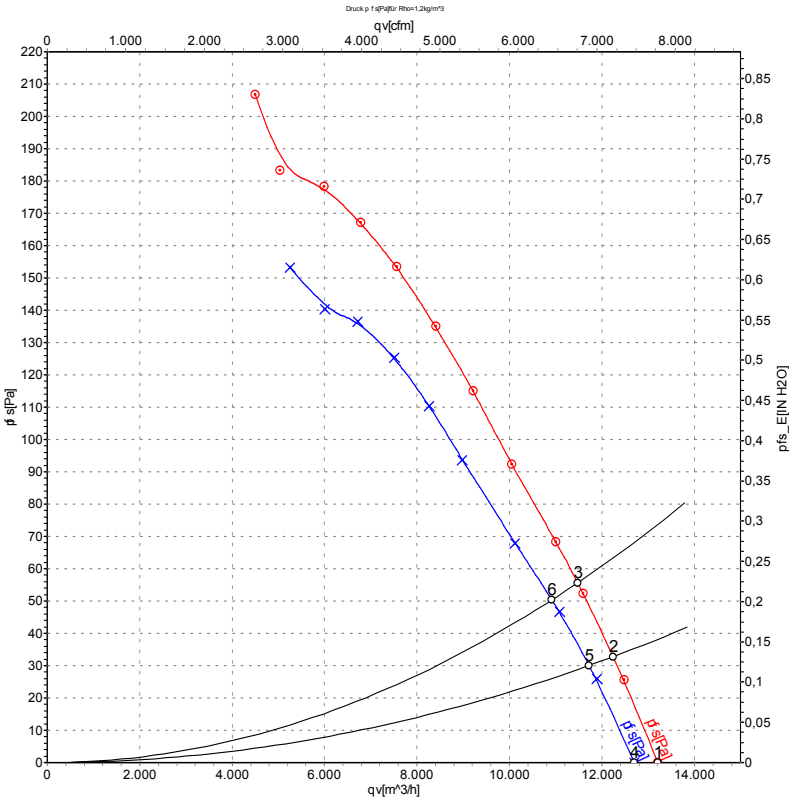

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	Y	480	60	1100	743	1.41	74	81	13210	0
2	Y	480	60	1090	803	1.45	73	79	12240	33
3	Y	480	60	1080	850	1.50	72	79	11480	55
4	Y	400	60	1055	672	1.32	73	80	12700	0
5	Y	400	60	1040	729	1.40	72	78	11720	30
6	Y	400	60	1025	770	1.45	71	78	10920	50

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side
qv = Air flow · p_{fs} = Pressure increase

