

S6D800-CI01-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	S6D800-CI01-01				
Motor	M6D138-HF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	890	700	1050	765
Power input	W	1100	730	1700	1030
Current draw	A	2.48	1.37	2.99	1.7
Max. back pressure	Pa	140	90	170	95
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	65	65	60	60
Starting current	A	9		10	

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		37.1	29.9	33.9
Efficiency grade N		43.2	36	40
Power input P_e	kW	1.08		
Air flow q_v	m ³ /h	10395		
Pressure increase p_{fs}	Pa	141		
Speed n	min ⁻¹	895		

Data established at point of optimum efficiency



Technical features


Mass	27.4 kg
Size	800 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-10°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; EN 60034; CE
Approval	VDE

AC axial fan - HyBlade®

sickled blades (S series)

with guard grille for full nozzle

Product drawing

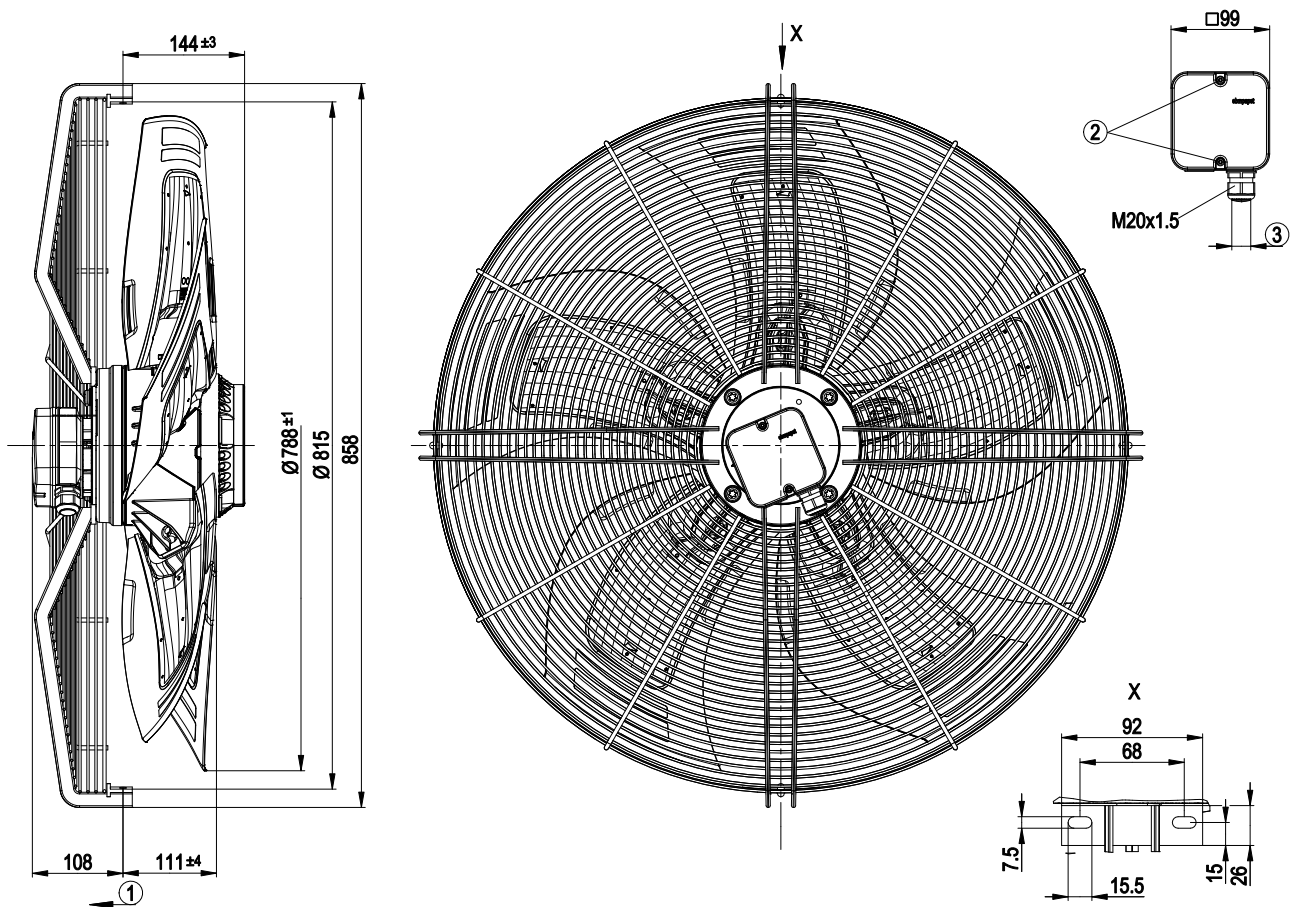


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque: 2.0 ± 0.3 Nm

AC axial fan - HyBlade®

sickled blades (S series)
with guard grille for full nozzle

Connection screen

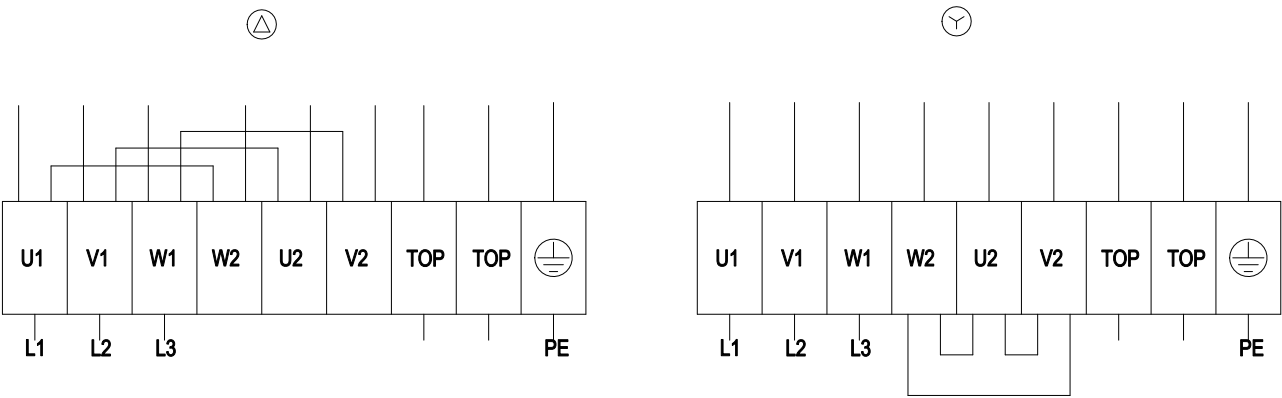


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan - HyBlade®

sickled blades (S series)
with guard grille for full nozzle

Charts: Air flow 50 Hz

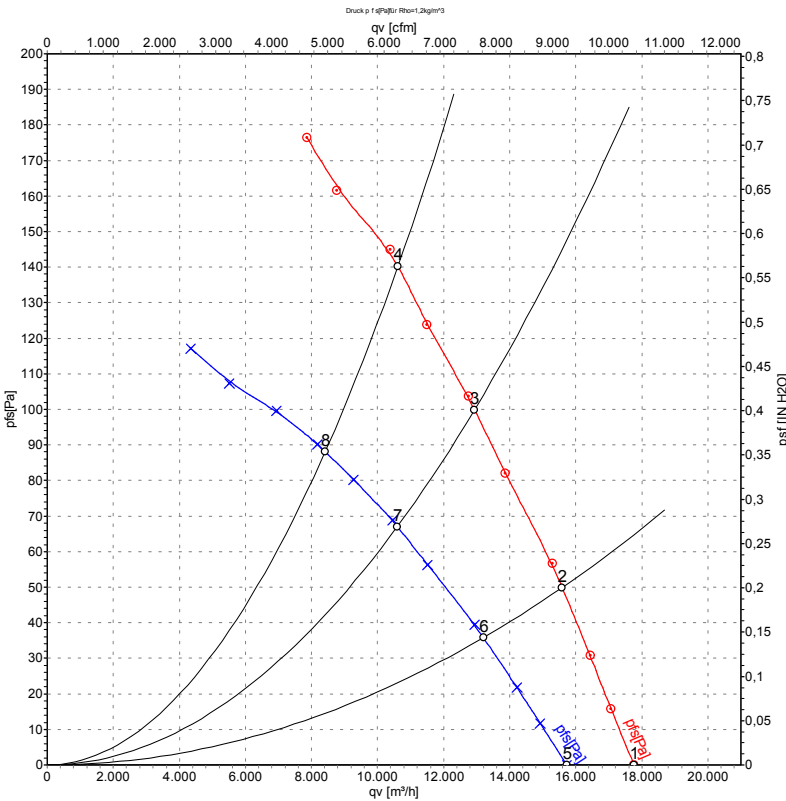

Measurement: LU-124250
Measurement: LU-124262

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	Δ	400	50	945	687	2.02	66	73	72	17760	0
2	Δ	400	50	925	839	2.13	63	70	69	15590	50
3	Δ	400	50	910	967	2.28	66	72	71	12930	100
4	Δ	400	50	890	1100	2.48	68	75	74	10610	140
5	Y	400	50	835	520	1.01	64	70	70	15720	0
6	Y	400	50	790	611	1.17	59	66	65	13200	36
7	Y	400	50	750	677	1.29	61	68	66	10600	67
8	Y	400	50	700	730	1.37	62	69	68	8415	88

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase




AC axial fan - HyBlade®

sickled blades (S series)

with guard grille for full nozzle

Charts: Air flow 60 Hz

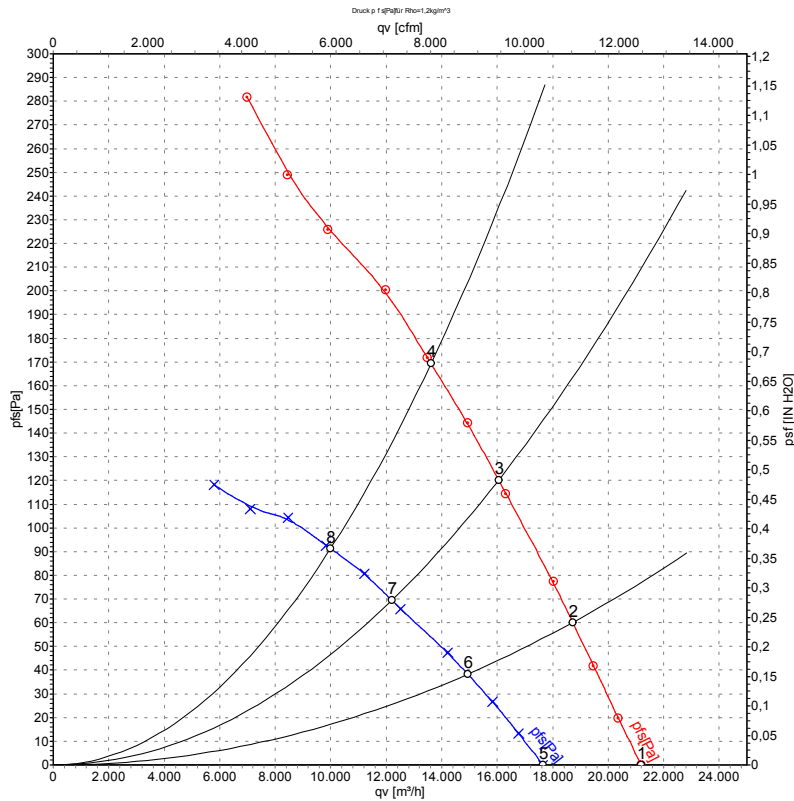

Measurement: LU-124255
Measurement: LU-124265

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa
1	Δ	480	60	1115	1096	2.25	71	77	77	21190	0
2	Δ	480	60	1095	1326	2.45	68	74	74	18720	60
3	Δ	480	60	1075	1525	2.66	69	76	74	16050	120
4	Δ	480	60	1050	1700	2.99	71	78	77	13620	170
5	Y	480	60	945	805	1.29	66	73	72	17650	0
6	Y	480	60	875	915	1.48	62	69	68	14940	38
7	Y	480	60	820	984	1.62	63	69	68	12210	69
8	Y	480	60	765	1030	1.70	63	70	69	9995	91

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_a = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · qv = Air flow · p_{is} = Pressure increase