

# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

S6D990-BX05-06 ebmpapst Datasheet FansCo

sales@fansco.com

www.fansco.com

## Nominal data

Type	S6D990-BX05-06			
Motor	M6D138-OA			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	415
Wiring		$\Delta$	Y	$\Delta$
Frequency	Hz	50	50	50
Method of obtaining data		ml	ml	ml
Valid for approval/standard		CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	930	770	930
Power consumption	W	2480	1820	2900
Current draw	A	5.63	3.42	6.4
Max. back pressure	Pa	120	80	195
Max. back pressure	in. wg	0.48	0.32	0.78
Min. ambient temperature	°C	-40	-40	-40
Max. ambient temperature	°C	60	60	45
Starting current	A	21	12	22

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

	Actual	Req. 2015				
01 Overall efficiency $\eta_{ES}$	%	39.6	36.4	09 Power consumption $P_e$	kW	2.69
02 Measurement category	A			09 Air flow $q_v$	m <sup>3</sup> /h	22620
03 Efficiency category	Static			09 Pressure increase $p_{fs}$	Pa	170
04 Efficiency grade N	43.2	40		10 Speed (rpm) n	min <sup>-1</sup>	920
05 Variable speed drive	No			11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-134881



# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Technical description

<b>Weight</b>	0.001 kg
<b>Size</b>	990 mm
<b>Motor size</b>	138
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	Die-cast aluminum, painted black
<b>Blade material</b>	Sheet aluminum insert (painted black), sprayed with PP plastic
<b>Number of blades</b>	5
<b>Blade pitch</b>	-5°
<b>Airflow direction</b>	V
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H2+A
<b>Ambient temperature note</b>	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) with basic insulation
<b>With cable</b>	Axial
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 60034-1 (2010); CE
<b>Approval</b>	VDE; EAC




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Product drawing

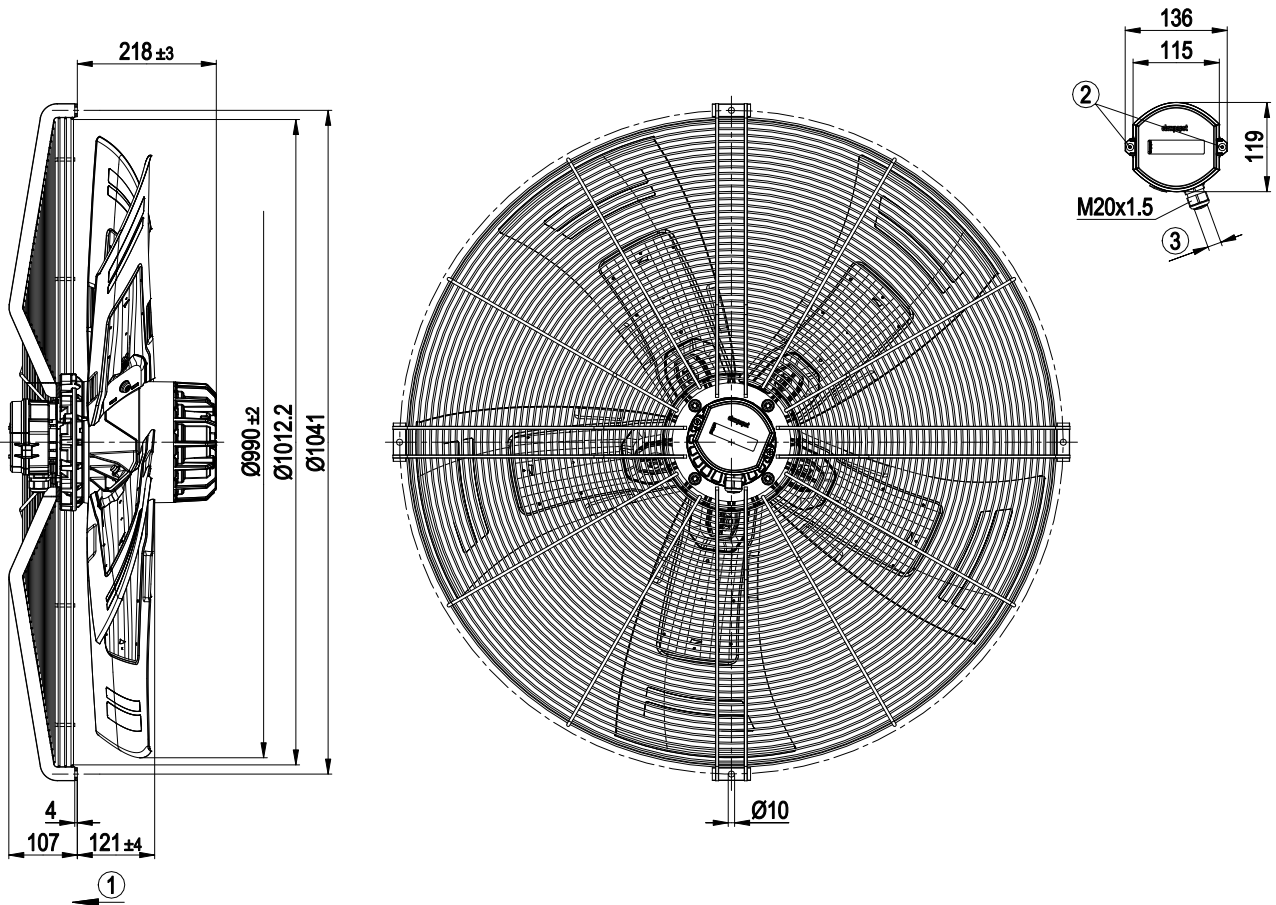

1	Airflow direction "V"
2	Tightening torque $2.5 \pm 0.4$ Nm
3	Cable diameter min. 7 mm, max. 14 mm, tightening torque $2 \pm 0.3$ Nm




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Connection diagram

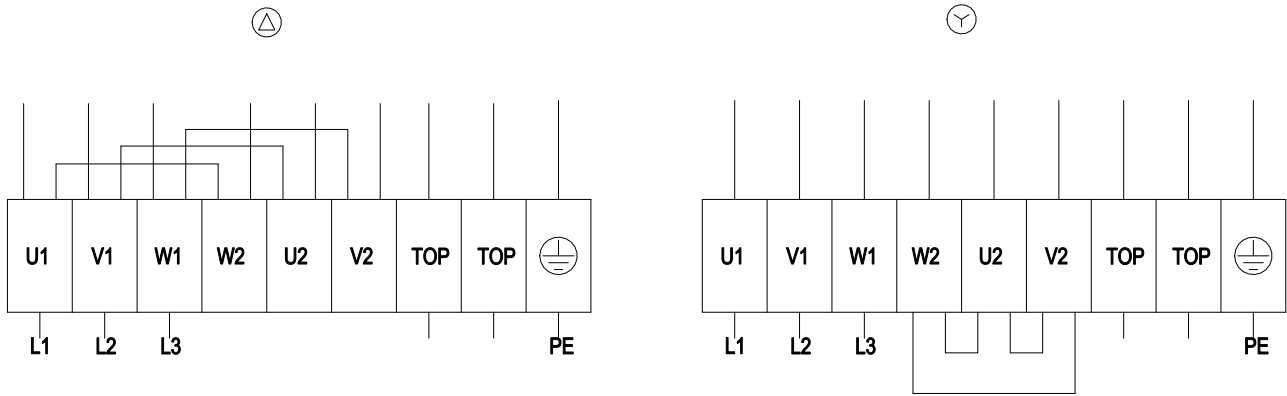

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				




# AC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Curves: Air performance 50 Hz

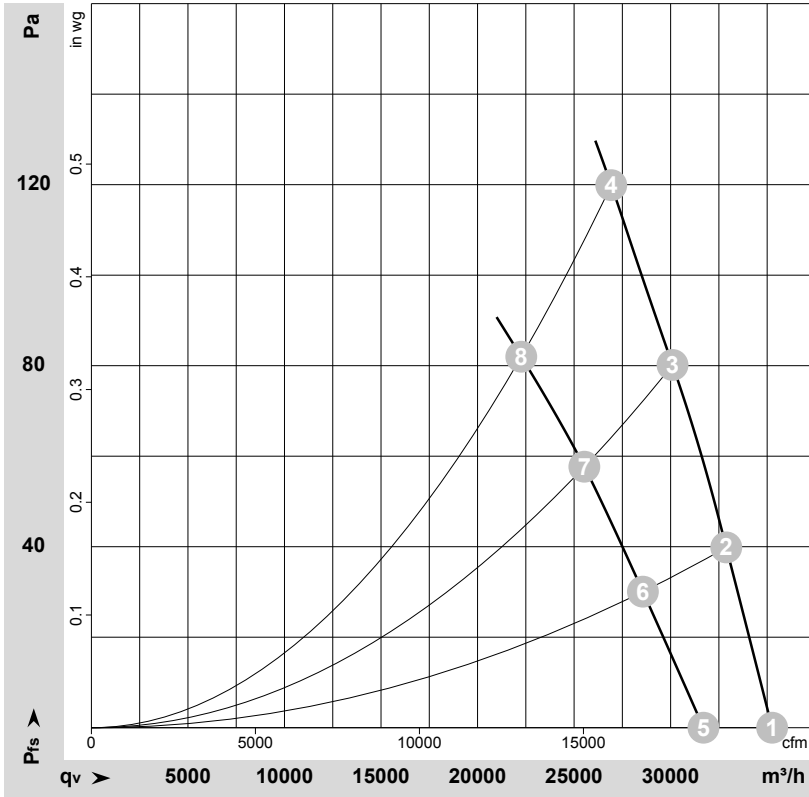

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-134881-1  
Measurement: LU-134883-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	Δ	400	50	960	1742	4.92	76	84	84	35260	0	20750	0.00
2	Δ	400	50	950	1996	5.12	75	82	83	32880	40	19355	0.16
3	Δ	400	50	940	2234	5.35	74	81	82	30100	80	17715	0.32
4	Δ	400	50	930	2480	5.63	74	81	81	26925	120	15845	0.48
5	Y	400	50	855	1377	2.60	73	81	81	31700	0	18660	0.00
6	Y	400	50	825	1543	2.90	71	79	79	28565	30	16810	0.12
7	Y	400	50	800	1691	3.18	70	78	77	25530	58	15025	0.23
8	Y	400	50	770	1820	3.42	69	77	76	22265	81	13105	0.33

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

