

# AC axial fan

straight blades (A series)

with guard grille for short nozzle

S6E350-AC24-13 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                             |                       |      |      |
|-----------------------------|-----------------------|------|------|
| <b>Type</b>                 | <b>S6E350-AC24-13</b> |      |      |
| <b>Motor</b>                | <b>M6E068-DC</b>      |      |      |
| Phase                       |                       | 1~   | 1~   |
| Nominal voltage             | VAC                   | 230  | 230  |
| Frequency                   | Hz                    | 50   | 60   |
| Method of obtaining data    |                       | fa   | fa   |
| Valid for approval/standard |                       | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup>     | 900  | 1050 |
| Power consumption           | W                     | 60   | 80   |
| Current draw                | A                     | 0.27 | 0.36 |
| Capacitor                   | µF                    | 2    | 2    |
| Capacitor voltage           | VDB                   | 400  | 400  |
| Max. back pressure          | Pa                    | 50   | 55   |
| Max. back pressure          | inH <sub>2</sub> O    | 0.2  | 0.22 |
| Min. ambient temperature    | °C                    | -25  | -25  |
| Max. ambient temperature    | °C                    | 65   | 60   |
| Starting current            | A                     | 0.4  | 0.38 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC axial fan

straight blades (A series)  
with guard grille for short nozzle

## Technical description


|  |  |
|--|--|
| Weight   | 3.8 kg   |
| Fan size   | 350 mm   |
| Rotor surface  | Painted black  |
| Impeller material  | Sheet steel, painted black                                   |
| Guard grille material  | Steel, phosphated and coated with black plastic              |
| Number of blades   | 5  |
| Airflow direction  | "A"  |
| Direction of rotation  | Clockwise, viewed toward rotor                               |
| Degree of protection   | IP44; installation- and position-dependent as per EN 60034-5 |
| Insulation class   | "B"  |
| Moisture (F) / Environmental (H) protection class                          | F2-2   |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C  |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C  |
| Installation position  | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes  | On rotor side  |
| Mode   | S1   |
| Motor bearing  | Ball bearing   |
| Speed levels   | 2  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA  |
| Motor protection   | Thermal overload protector (TOP) internally connected        |
| With cable   | Lateral  |
| Protection class   | I (with customer connection of protective earth)             |
| Motor capacitor according to EN 60252-1 in safety protection class         | S0   |
| Conformity with standards  | EN 60335-1; CE   |
| Approval   | UL 1004-1; EAC; CSA C22.2 No. 100; CCC                       |



# AC axial fan

straight blades (A series)  
with guard grille for short nozzle

## Product drawing

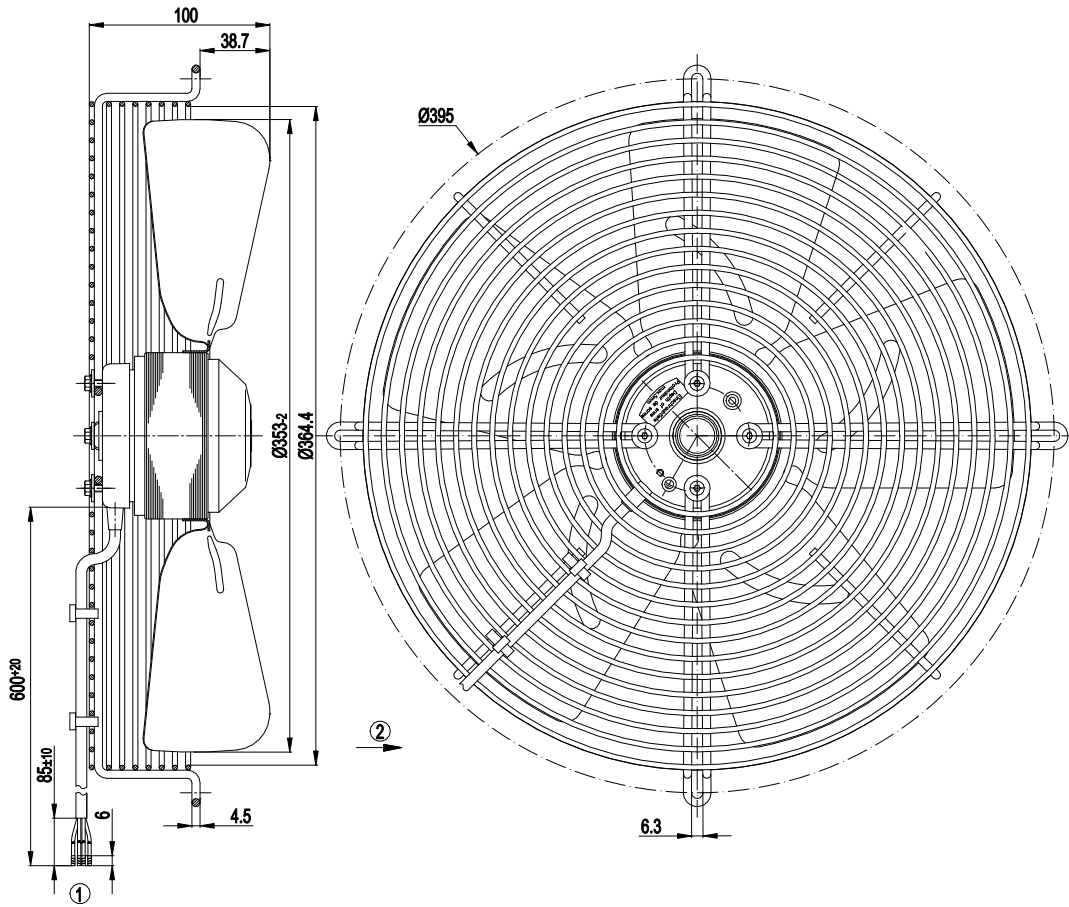


|   |                                    |
|---|------------------------------------|
| 1   | Cable PFA AWG20, 6x crimped splice |
| 2   | Direction of air flow "A"          |
| Motor capacitor AEG / MLB MKP 2/400 (2 µF 400VDB) included separately |                                    |



# AC axial fan

straight blades (A series)  
with guard grille for short nozzle

## Connection diagram

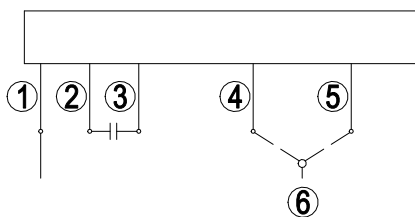

Note: High speed (step II); low speed (step I)


|   |              |   |               |   |        |
|---|--------------|---|---------------|---|--------|
| 1 | = N = blue   | 2 | brown         | 3 | yellow |
| 4 | Step I white | 5 | Step II black | 6 | L1     |



# AC axial fan

straight blades (A series)  
with guard grille for short nozzle

## Curves: Air performance 50 Hz

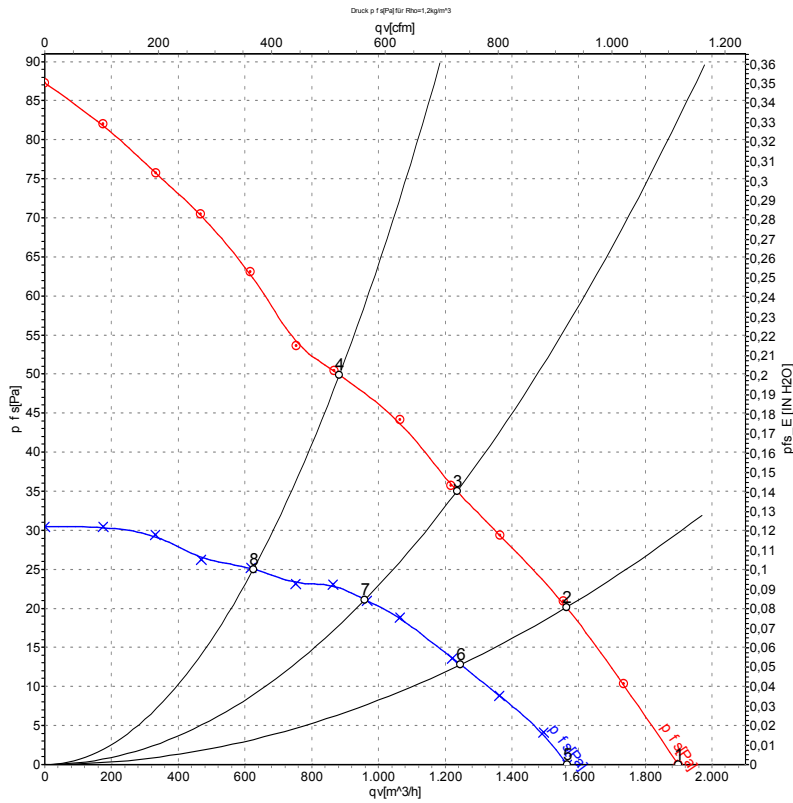

Measurement: LU-55086-1  
Measurement: LU-55088-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub>    | P <sub>fs</sub> | q <sub>V</sub> | P <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 230 | 50 | 900               | 60             | 0.27 | 1900              | 0               | 1115           | 0.00               |
| 2 | 230 | 50 | 895               | 61             | 0.27 | 1565              | 20              | 920            | 0.08               |
| 3 | 230 | 50 | 885               | 62             | 0.28 | 1235              | 35              | 725            | 0.14               |
| 4 | 230 | 50 | 850               | 67             | 0.30 | 885               | 50              | 520            | 0.20               |
| 5 | 230 | 50 | 755               | 45             | 0.20 | 1565              | 0               | 920            | 0.00               |
| 6 | 230 | 50 | 715               | 47             | 0.21 | 1245              | 13              | 735            | 0.05               |
| 7 | 230 | 50 | 690               | 48             | 0.21 | 960               | 21              | 565            | 0.08               |
| 8 | 230 | 50 | 595               | 51             | 0.22 | 625               | 25              | 370            | 0.10               |


U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>V</sub> = Air flow · P<sub>fs</sub> = Pressure increase



# AC axial fan

straight blades (A series)  
with guard grille for short nozzle

## Curves: Air performance 60 Hz

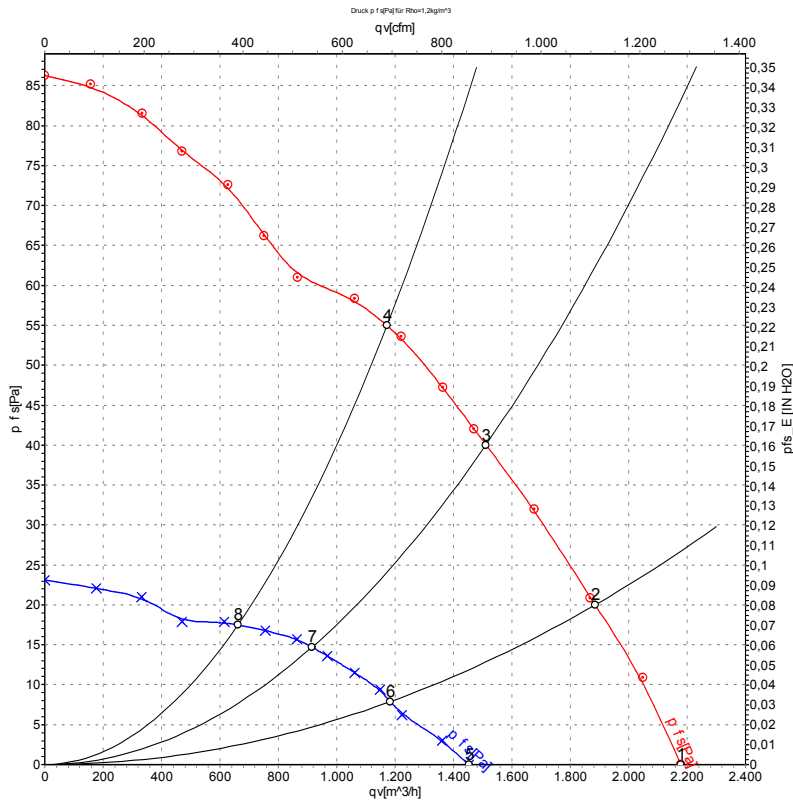

Measurement: LU-55087-1  
Measurement: LU-55089-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 230 | 60 | 1050              | 80             | 0.36 | 2180              | 0               | 1285           | 0.00               |
| 2 | 230 | 60 | 1025              | 81             | 0.36 | 1885              | 20              | 1110           | 0.08               |
| 3 | 230 | 60 | 1010              | 83             | 0.36 | 1510              | 40              | 890            | 0.16               |
| 4 | 230 | 60 | 960               | 85             | 0.37 | 1170              | 55              | 690            | 0.22               |
| 5 | 230 | 60 | 700               | 49             | 0.23 | 1450              | 0               | 855            | 0.00               |
| 6 | 230 | 60 | 645               | 49             | 0.23 | 1185              | 8               | 695            | 0.03               |
| 7 | 230 | 60 | 610               | 50             | 0.23 | 915               | 15              | 540            | 0.06               |
| 8 | 230 | 60 | 540               | 50             | 0.23 | 660               | 18              | 390            | 0.07               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

