

AC axial fan - HyBlade®

sickled blades (S series)
with guard grille for full nozzle

S8E630-BK01-02 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S8E630-BK01-02	
Motor	M8E110-EF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		ml
Valid for approval / standard		CE
Speed	min ⁻¹	575
Power input	W	280
Current draw	A	1.44
Motor capacitor	µF	4
Capacitor voltage	VDB	400
Max. back pressure	Pa	45
Max. ambient temperature	°C	65

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



AC axial fan - HyBlade®

sickled blades (S series)


with guard grille for full nozzle

Technical features

Mass	15.1 kg
Size	630 mm
Surface of rotor	Coated in black
Material of terminal box	ABS plastic, black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of rotation	"A"
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Leakage current	<= 3.5 mA
Electrical leads	Via terminal box, integrated capacitor connected via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	VDE



Product drawing

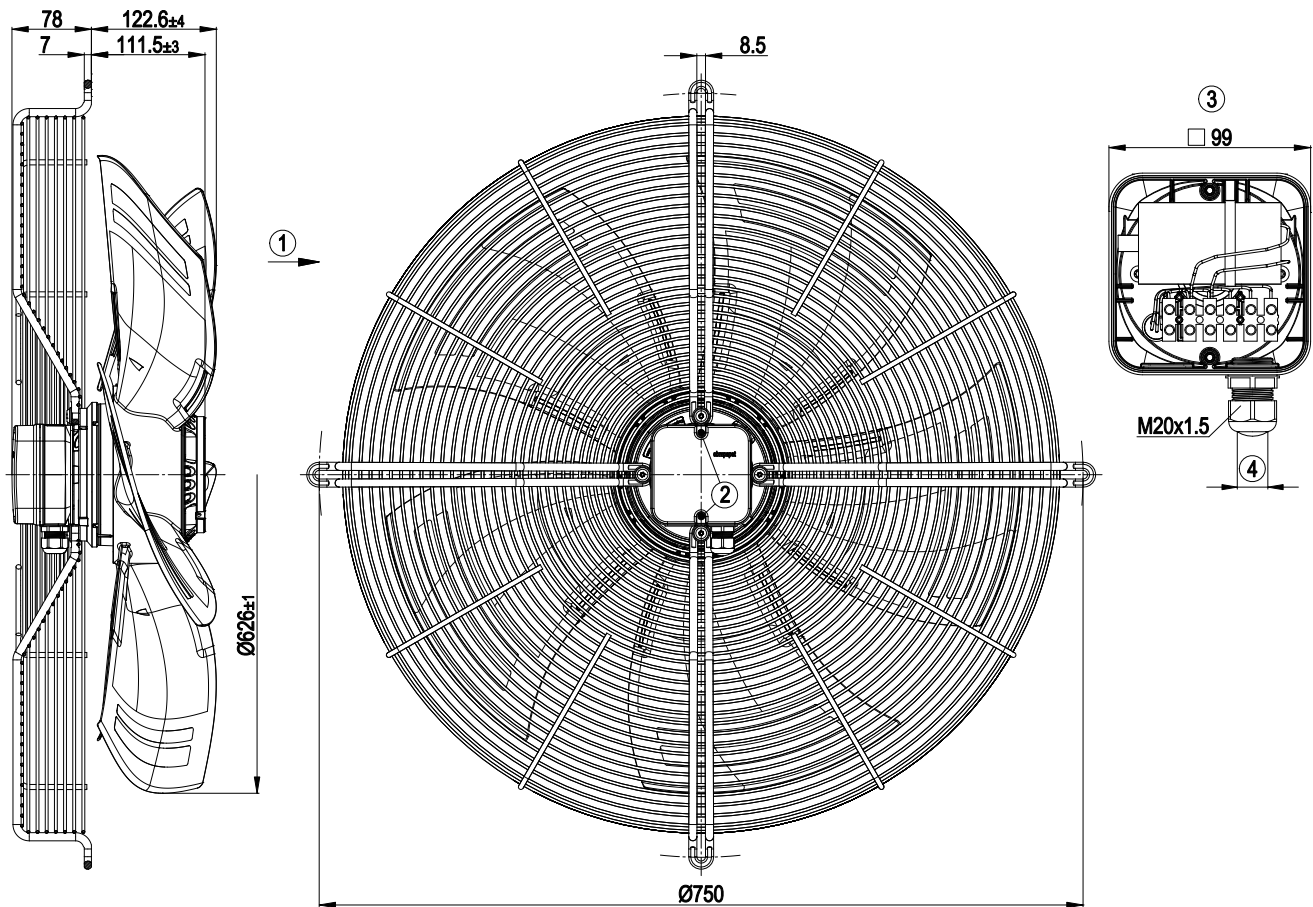


1	Direction of air flow "A"
2	Tightening torque 0.8 ± 0.15 Nm
3	Illustration without terminal box cover
4	Cable diameter: min. 6 mm, max. 12 mm; tightening torque: 2 ± 0.3 Nm

AC axial fan - HyBlade®

sickled blades (S series)
with guard grille for full nozzle

Connection screen




L	= U1 = blue	Z	brown	N	= U2 = black
PE	green / yellow	TOP	grey		



AC axial fan - HyBlade®

sickled blades (S series)
with guard grille for full nozzle

Charts: Air flow 50 Hz

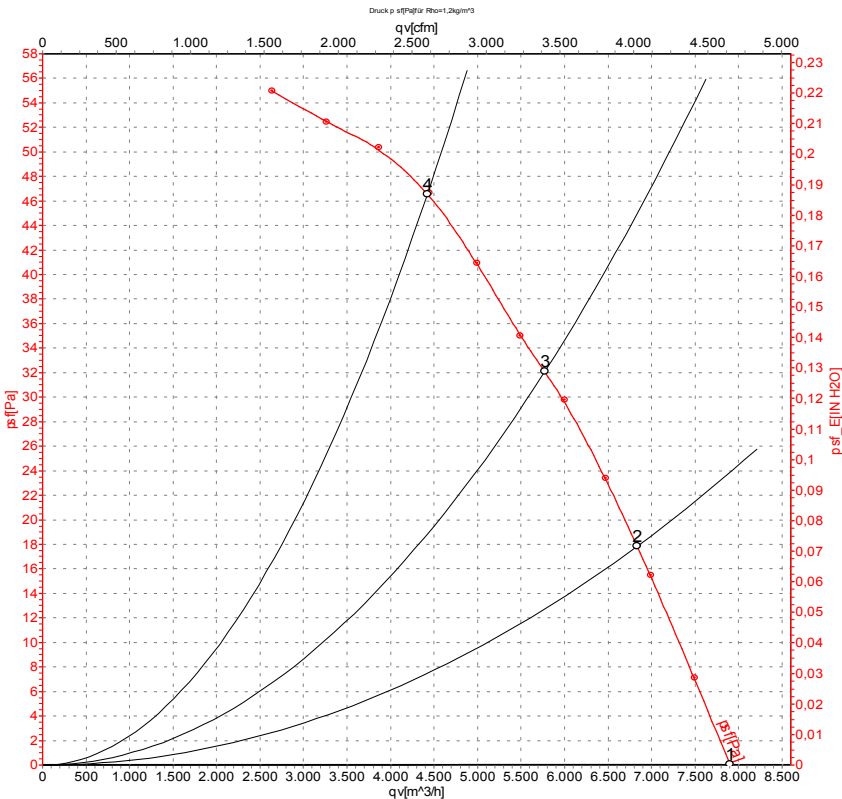

Measurement: LU-107586

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{sf}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	230	50	655	227	1.22	56	62	62	7900	0
2	230	50	625	250	1.31	54	60	60	6835	18
3	230	50	600	268	1.38	52	59	59	5770	32
4	230	50	575	280	1.44	52	59	59	4425	45

