

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

W1G172-EC91-21 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G172-EC91-21	
Motor	M1G055-BD	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	2500
Power input	W	22
Current draw	A	0.18
Max. back pressure	Pa	60
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	0.9 kg
Size	172 mm
Material of impeller	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Right and left
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; CE
Approval	CSA C22.2 No.77; UL 1004-3; VDE

EC axial fan - ESM


sickled blades (S series), single inlet
ESM wall ring

Product drawing

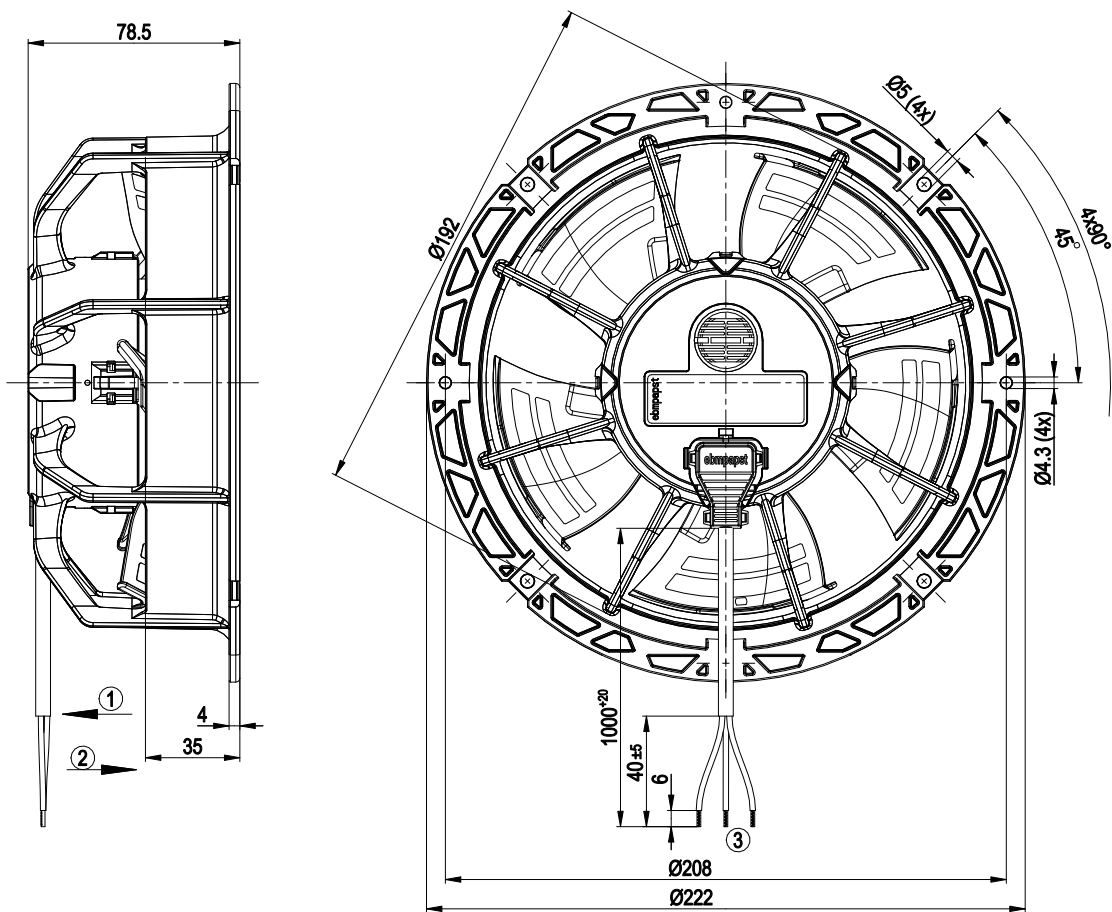


- | | |
|---|---|
| 1 | Direction of air flow "A" |
| 2 | Direction of air flow "V" |
| 3 | Connection line PVC AWG20, 3x lead tips crimped |

Connection screen

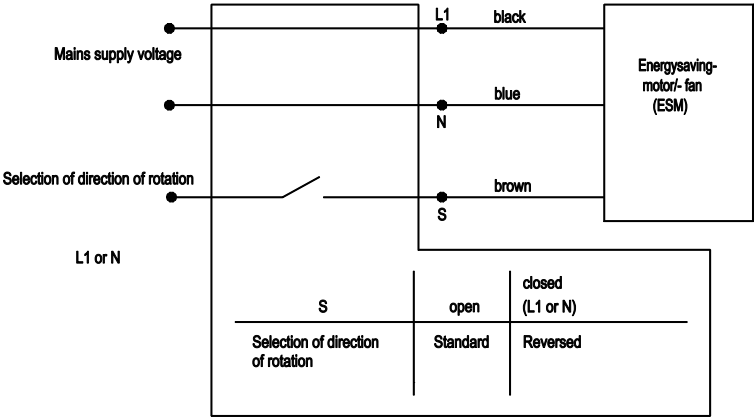

Charts: Air flow 50 Hz

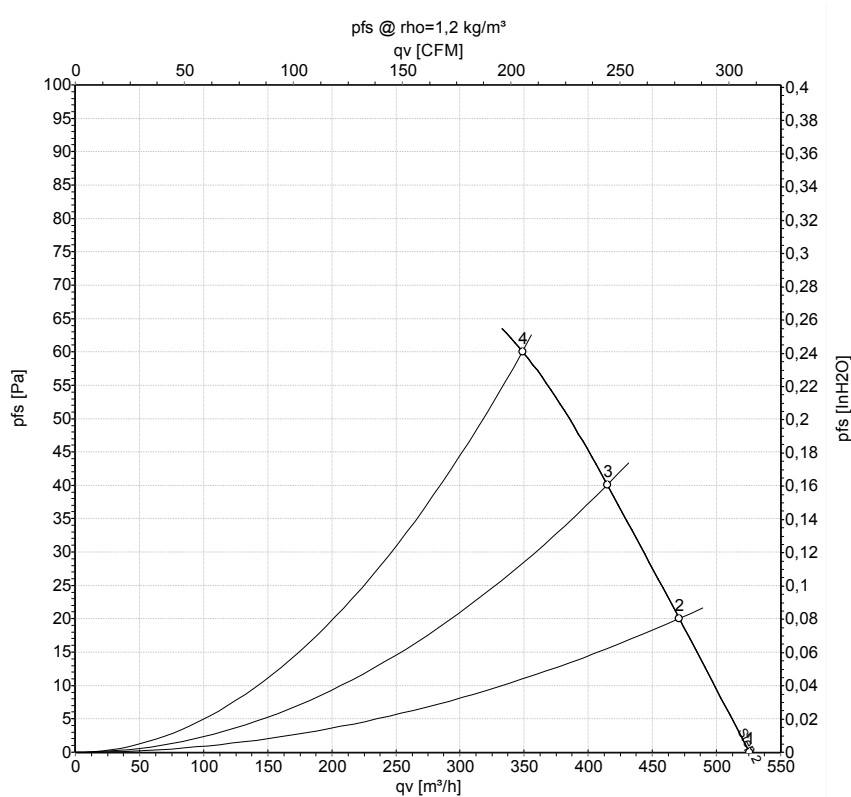

Measurement: LU-117884-1

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{wA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	Stage	U	f	n	P_{ed}	I	$L_{pA_{in}}$	$L_{wA_{in}}$	q_v	p_{fs}	q_v	p_{fs}
		V	Hz	min^{-1}	W	A	dB(A)	dB(A)	$\text{m}^3\text{/h}$	Pa	cfm	inH ₂ O
1	2	230	50	2500	22	0.17	54	62	525	0	310	0.00
2	2	230	50	2500	22	0.18	55	63	470	20	275	0.08
3	2	230	50	2500	22	0.18	54	63	415	40	245	0.16
4	2	230	50	2500	22	0.18	54	63	350	60	205	0.24

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · $L_{pA_{in}}$ = Sound pressure level inlet side · $L_{wA_{in}}$ = Sound power level inlet side · q_v = Air flow
 p_{fs} = Pressure increase