

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

W1G172-EC91-26 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G172-EC91-26	
Motor	M1G055-BD	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed (rpm)	min ⁻¹	1600
Power input	W	9
Current draw	A	0.07
Max. back pressure	Pa	25
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Technical features


Mass	0.9 kg
Size	172 mm
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Electrical leads	With plug
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	VDE; UL 1004-3; CSA C22.2 No.77



EC axial fan - ESM


sickled blades (S series), single inlet
ESM wall ring

Product drawing

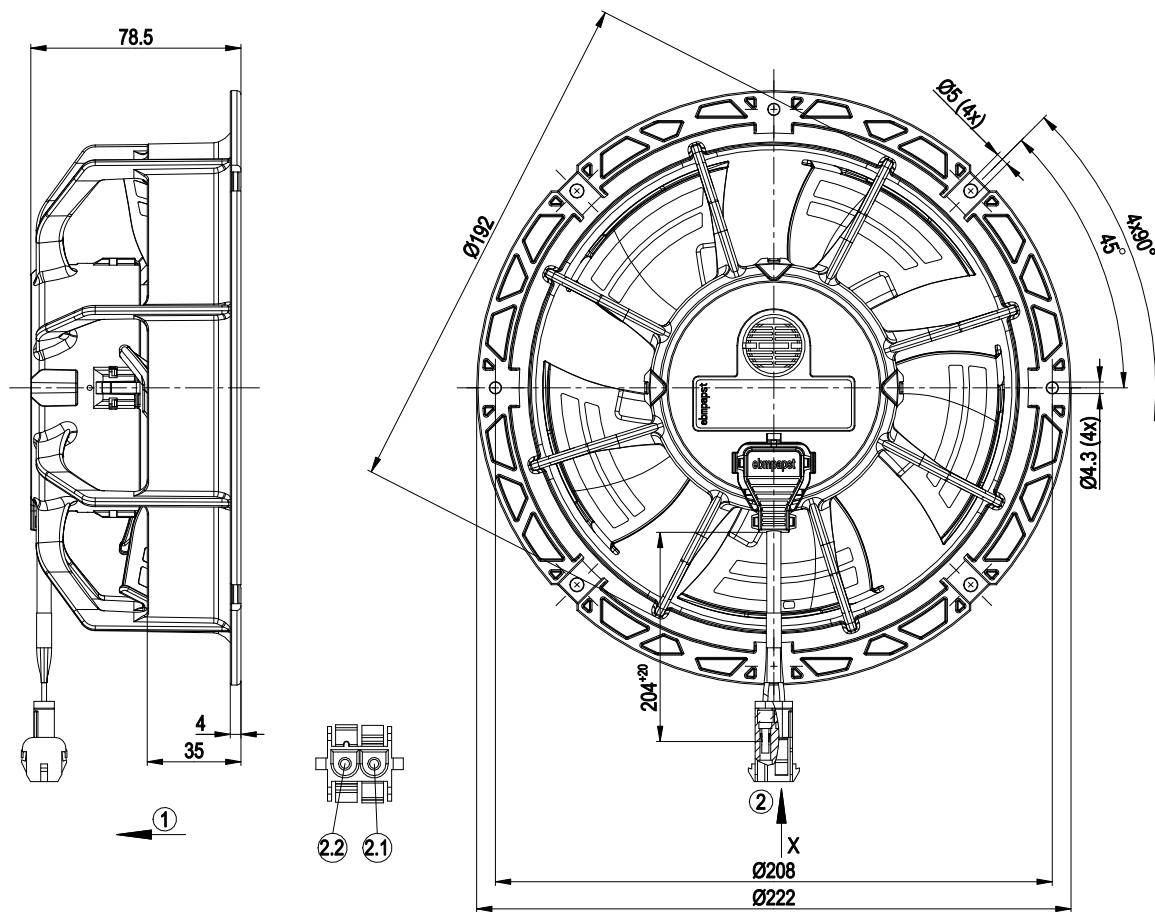

1	Direction of air flow "V"
2	Connection line PVC AWG18, connector housing 2-pole tyco 1-1703062-2, 2x plug pin tyco 350536-2
2.1	N (blue)
2.2	L (black)


Connection screen

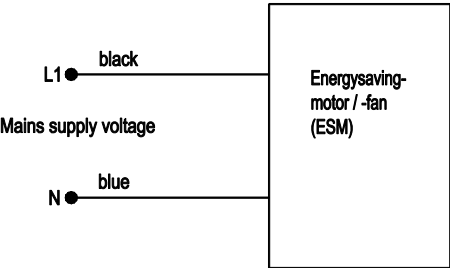

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

Charts: Air flow 50 Hz

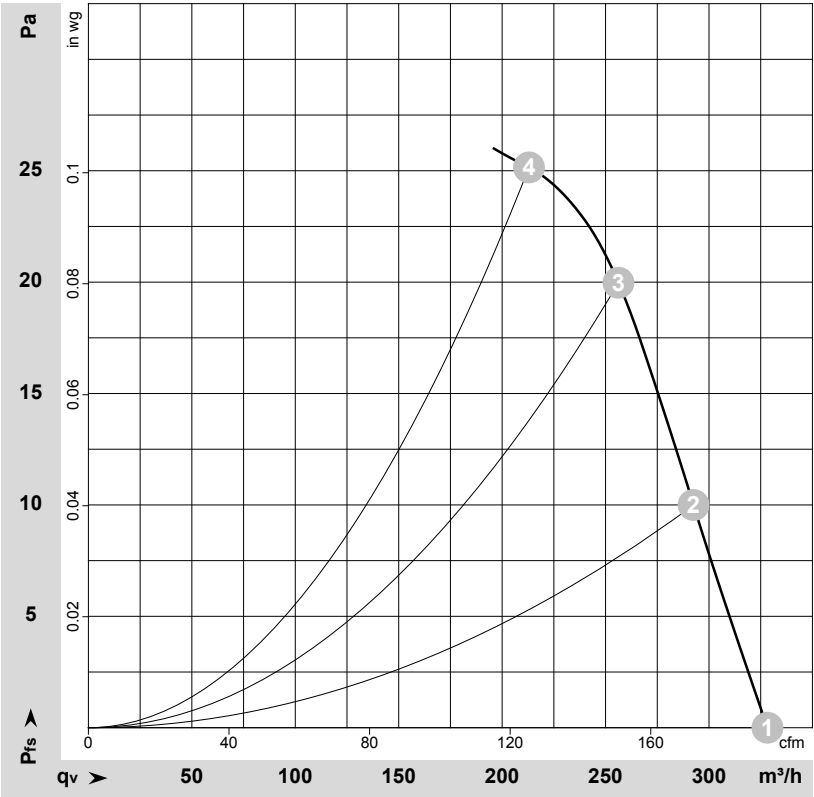

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-171281-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Stage	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	1	230	50	1600	7.0	0.06	43	52	330	0	195	0.00
2	1	230	50	1600	8.0	0.07	42	51	295	10	170	0.04
3	1	230	50	1600	9.0	0.07	42	51	255	20	150	0.08
4	1	230	50	1600	9.0	0.07	49	58	215	25	125	0.10

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

