

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

W1G172-EC91-32 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G172-EC91-32		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Type of data definition		ml	
Speed (rpm)	min ⁻¹	2500	1700
Power input	W	22	
Current draw	A	0.18	
Max. back pressure	Pa	60	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Technical features

Mass	0.9 kg
Size	172 mm
Material of impeller	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Right and left
Type of protection	IP 54; Only with suitable connector, which has to be fitted by the customer
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Direction of rotation selection counter-clockwise / clockwise - ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
Speed steps	2
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	CSA C22.2 No.77; VDE; UL 1004-3




EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Product drawing

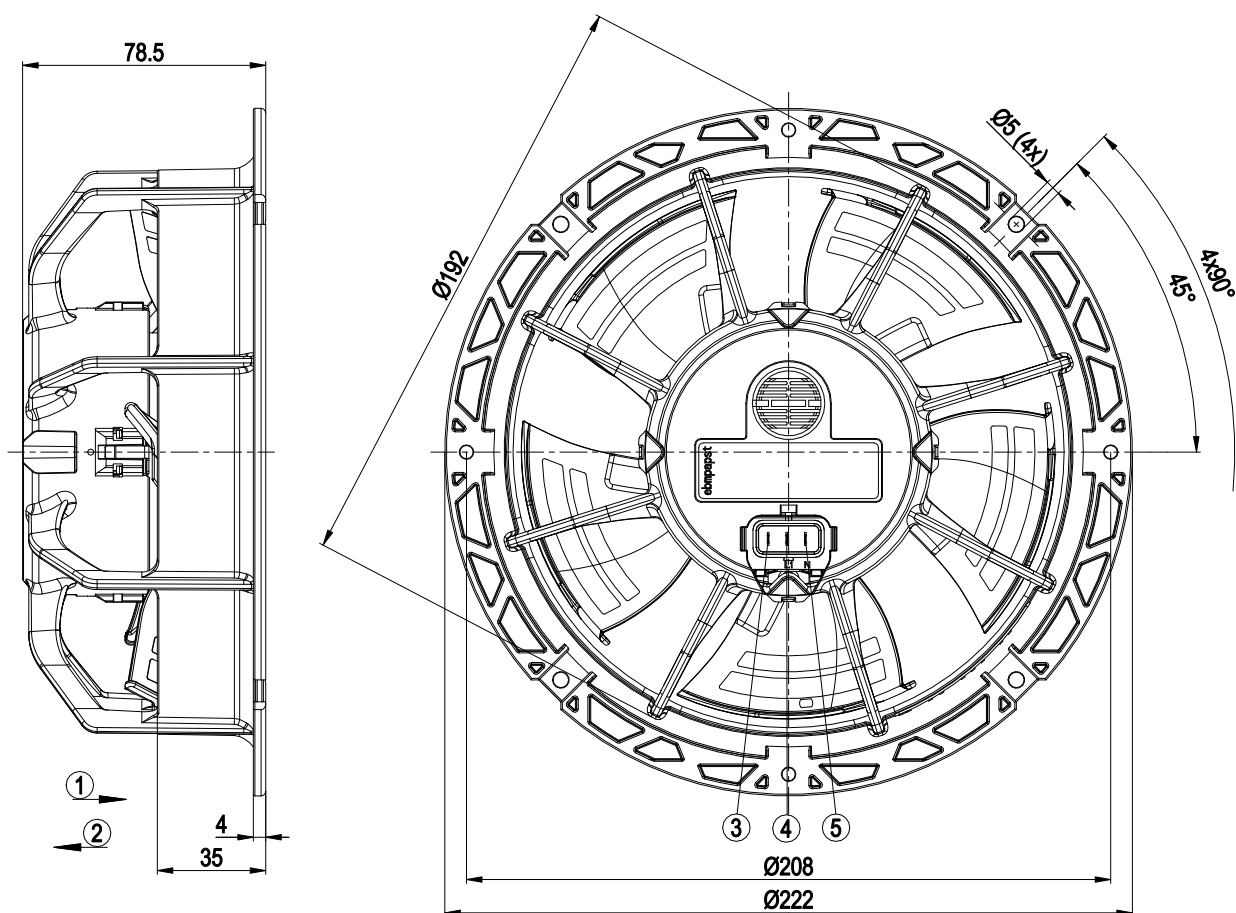


1	Direction of air flow "A"
2	Direction of air flow "V"
3	PIN S, direction of rotation selection (flat connector 2.8x0.5)
4	PIN L1, phase (flat connector 2.8x0.5)
5	PIN N, neutral conductor (flat connector 2.8x0.5)

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

Connection screen

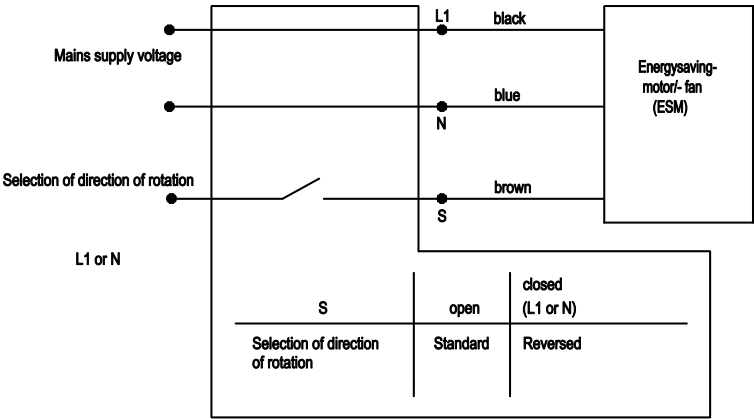


EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Charts: Air flow 50 Hz

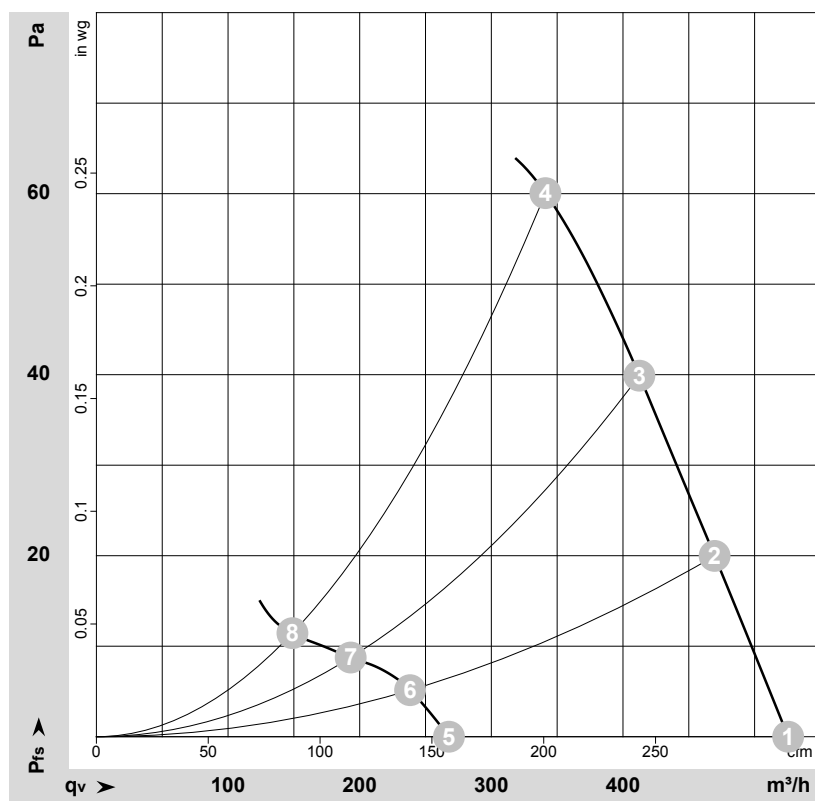

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-117884-1
Measurement: LU-180134-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Stage	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	2	230	50	2500	22	0.17	54	62	525	0	310	0.00
2	2	230	50	2500	22	0.18	55	63	470	20	275	0.08
3	2	230	50	2500	22	0.18	54	63	410	40	240	0.16
4	2	230	50	2500	22	0.18	55	63	340	60	200	0.24
5		230	50	1700	5.0	0.04			270	0	160	0.00
6		230	50	1700	5.0	0.04			240	5	140	0.02
7		230	50	1700	5.0	0.03			195	9	115	0.04
8		230	50	1700	5.0	0.03			150	11	90	0.04

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

