

W1G172-EC95-23

EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

W1G172-EC95-23 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W1G172-EC95-23		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	115	115
Frequency	Hz	50/60	50/60
Type of data definition		ml	
Speed (rpm)	min ⁻¹	2500	1700
Power input	W	21	
Current draw	A	0.3	
Max. back pressure	Pa	60	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Technical features


Mass	0.9 kg
Size	172 mm
Material of blades	PA plastic
Material of wall ring	Plastic, PP
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54; Only with suitable connector, which has to be fitted by the customer
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Speed selection max/min - ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
Speed steps	2
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	CSA C22.2 No.77; UL 1004-3; VDE



EC axial fan - ESM


sickled blades (S series), single inlet
ESM wall ring

Product drawing

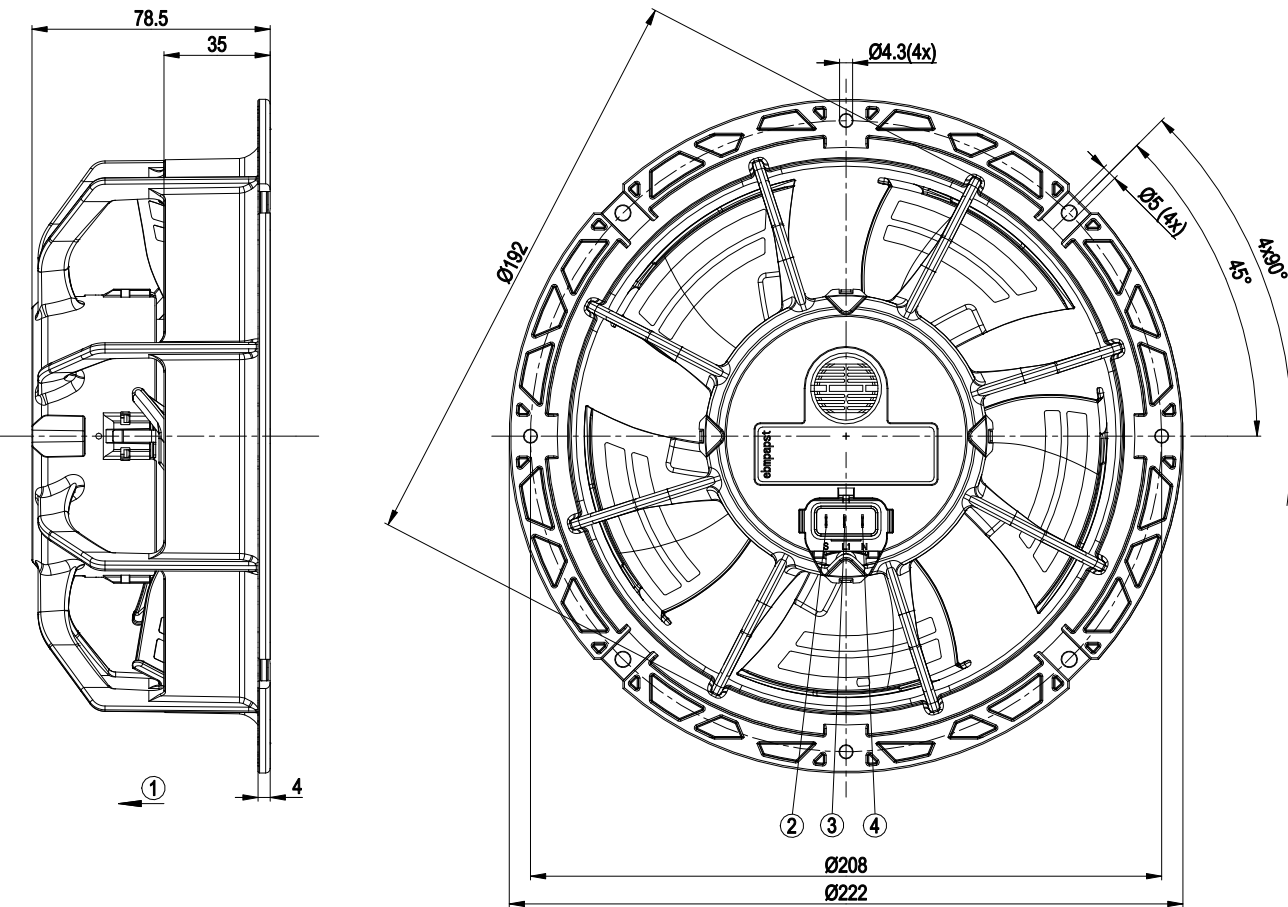

1	Direction of air flow "V"
2	PIN S, speed selection (flat connector 2.8 x 0.5)
3	PIN L1, phase (flat connector 2.8 x 0.5)
4	PIN N, neutral conductor (flat connector 2.8 x 0.5)


Connection screen

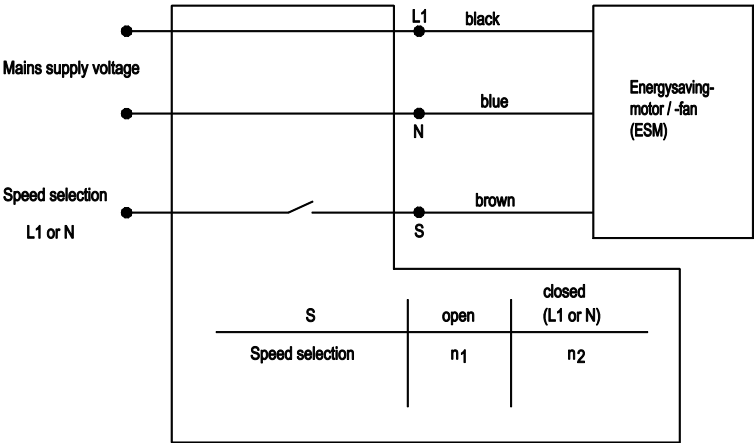

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

Charts: Air flow 50 Hz

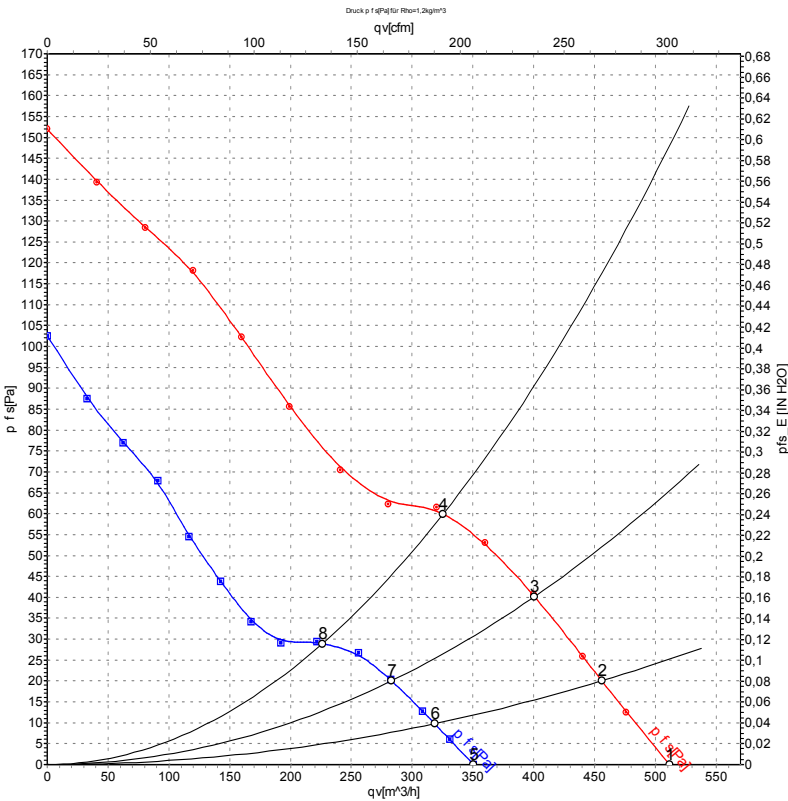

Measurement: LU-119084-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Stage	U	f	n	P _{ed}	I	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	2	115	50	2500	20	0.28	510	0	300	0.00
2	2	115	50	2500	21	0.30	455	20	270	0.08
3	2	115	50	2500	21	0.30	400	40	235	0.16
4	2	115	50	2500	21	0.30	325	60	190	0.24
5	2	115	50	1700	9.0	0.14	350	0	205	0.00
6	2	115	50	1700	10.0	0.16	320	10	185	0.04
7	2	115	50	1700	11	0.16	285	20	165	0.08
8	2	115	50	1700	10.0	0.16	225	29	135	0.12

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

