

# EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

W1G172-EC95-25 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                          |                   |       |
|--------------------------|-------------------|-------|
| Type                     | W1G172-EC95-25    |       |
| Motor                    | M1G055-BD         |       |
| Phase                    |                   | 1~    |
| Nominal voltage          | VAC               | 115   |
| Frequency                | Hz                | 50/60 |
| Type of data definition  |                   | ml    |
| Speed (rpm)              | min <sup>-1</sup> | 1600  |
| Power input              | W                 | 9     |
| Current draw             | A                 | 0.14  |
| Max. back pressure       | Pa                | 25    |
| Min. ambient temperature | °C                | -30   |
| Max. ambient temperature | °C                | 50    |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations




## Technical features

|                                                         |                                                                                                                                                           |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                    | 0.9 kg                                                                                                                                                    |
| Size                                                    | 172 mm                                                                                                                                                    |
| Material of blades                                      | PA plastic                                                                                                                                                |
| Material of wall ring                                   | PP plastic                                                                                                                                                |
| Number of blades                                        | 5                                                                                                                                                         |
| Direction of air flow                                   | "V"                                                                                                                                                       |
| Direction of rotation                                   | Counter-clockwise, seen on rotor                                                                                                                          |
| Type of protection                                      | IP 54                                                                                                                                                     |
| Insulation class                                        | "B"                                                                                                                                                       |
| Humidity (F)/environmental protection class (H)         | H1                                                                                                                                                        |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C                                                                                                                                                    |
| Min. permissible ambient motor temp. (transp./storage)  | -40 °C                                                                                                                                                    |
| Mounting position                                       | Any                                                                                                                                                       |
| Condensate discharge holes                              | None                                                                                                                                                      |
| Operation mode                                          | S1                                                                                                                                                        |
| Motor bearing                                           | Ball bearing                                                                                                                                              |
| Technical features                                      | <ul style="list-style-type: none"> <li>- ESM+ extensible with plug-in module</li> <li>- Soft start</li> <li>- Over-temperature protected motor</li> </ul> |
| EMC interference immunity                               | Acc. to EN 61000-6-2 (industrial environment)                                                                                                             |
| EMC interference emission                               | Acc. to EN 61000-6-3 (household environment)                                                                                                              |
| Electrical leads                                        | With plug                                                                                                                                                 |
| Motor protection                                        | Thermal overload protector (TOP) wired internally                                                                                                         |
| Cable exit                                              | Lateral                                                                                                                                                   |
| Protection class                                        | II                                                                                                                                                        |
| Product conforming to standard                          | EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE                                                                                               |
| Approval                                                | UL 1004-3; VDE; CSA C22.2 No.77                                                                                                                           |

# EC axial fan - ESM


sickled blades (S series), single inlet  
ESM wall ring

## Product drawing

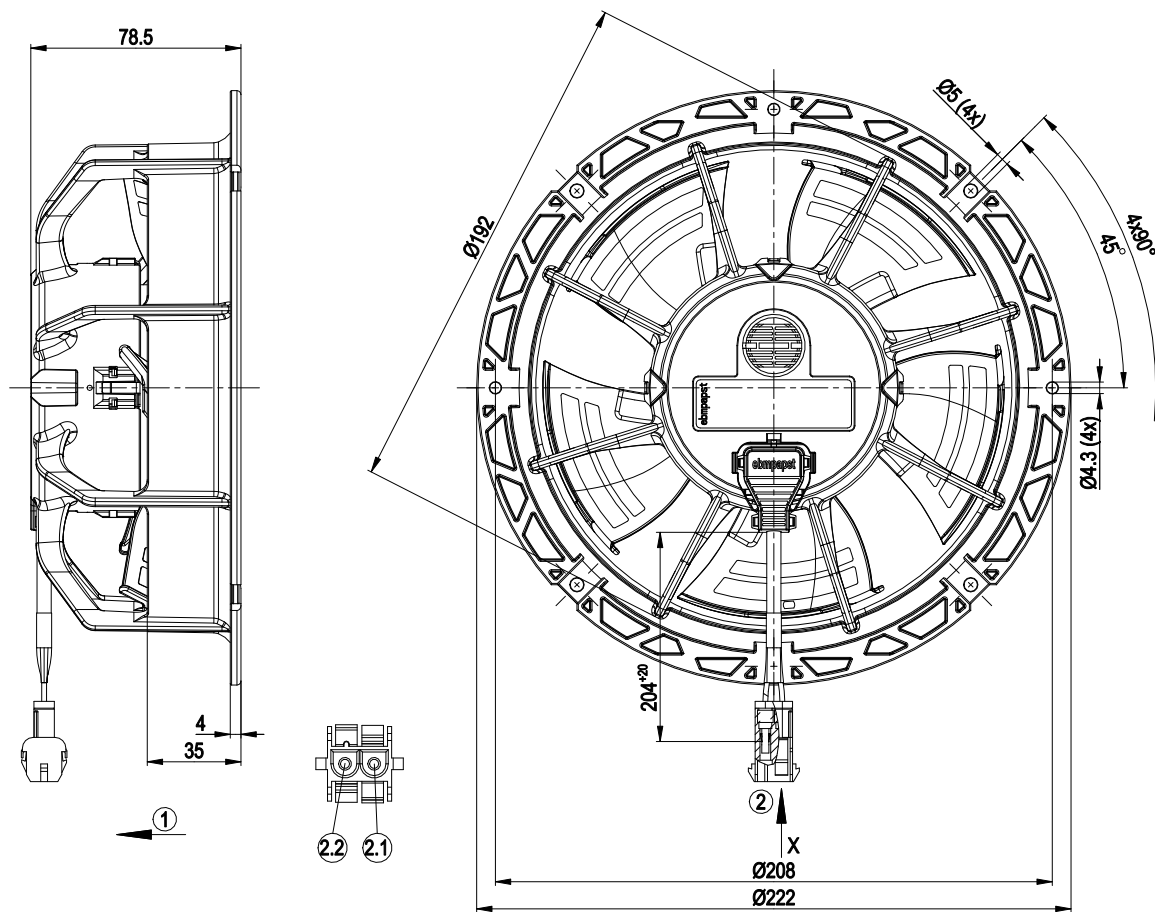

|     |                                                                                                 |
|-----|-------------------------------------------------------------------------------------------------|
| 1   | Direction of air flow "V"                                                                       |
| 2   | Connection line PVC AWG18, connector housing 2-pole tyco 1-1703062-2, 2x plug pin tyco 350536-2 |
| 2.1 | N (blue)                                                                                        |
| 2.2 | L (black)                                                                                       |


## Connection screen

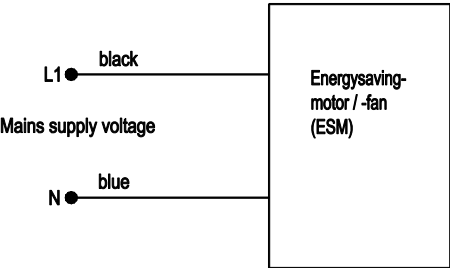

EC axial fan - ESM

sickled blades (S series), single inlet  
ESM wall ring

Charts: Air flow 50 Hz

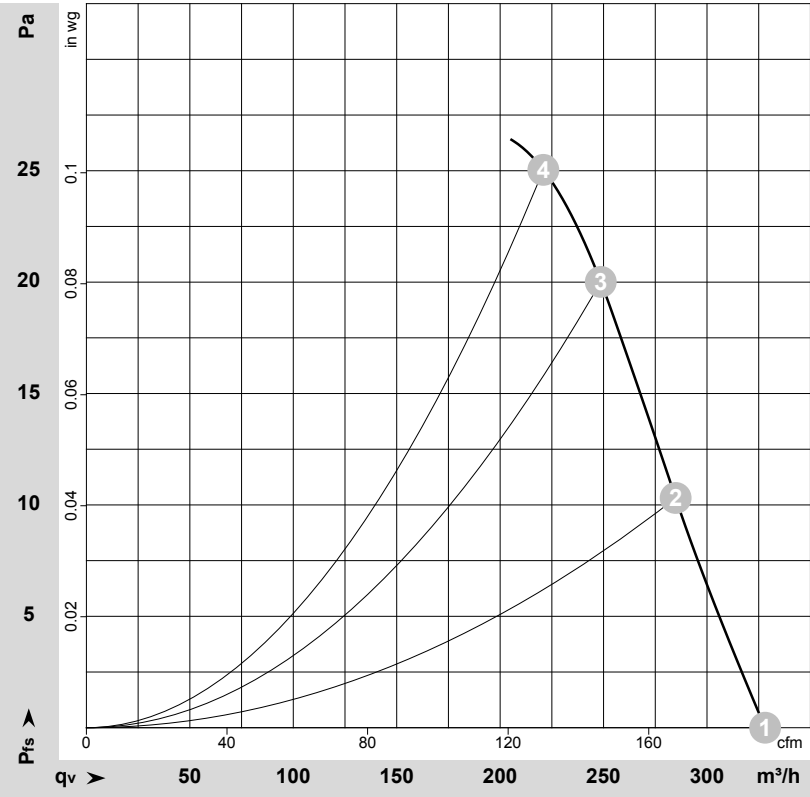

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-177960-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | inH2O           |
| 1 | 115 | 50 | 1600              | 8.0             | 0.12 | 45                | 54                | 330            | 0               | 195            | 0.00            |
| 2 | 115 | 50 | 1600              | 8.0             | 0.13 | 45                | 53                | 285            | 10              | 170            | 0.04            |
| 3 | 115 | 50 | 1600              | 8.0             | 0.13 | 46                | 55                | 250            | 20              | 145            | 0.08            |
| 4 | 115 | 50 | 1600              | 9.0             | 0.14 | 49                | 57                | 220            | 25              | 130            | 0.10            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
p<sub>fs</sub> = Pressure increase

