

W1G200-EC87-53

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring



W1G200-EC87-53 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EC87-53		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Type of data definition		ml	
Speed (rpm)	min ⁻¹	1300	900
Power input	W	8	
Current draw	A	0.07	
Max. back pressure	Pa	23	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Technical features

Mass	1 kg
Size	200 mm
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Speed adjustment input (230 V) - ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
Speed steps	2
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Electrical leads	With plug
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	VDE; EAC




EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Product drawing

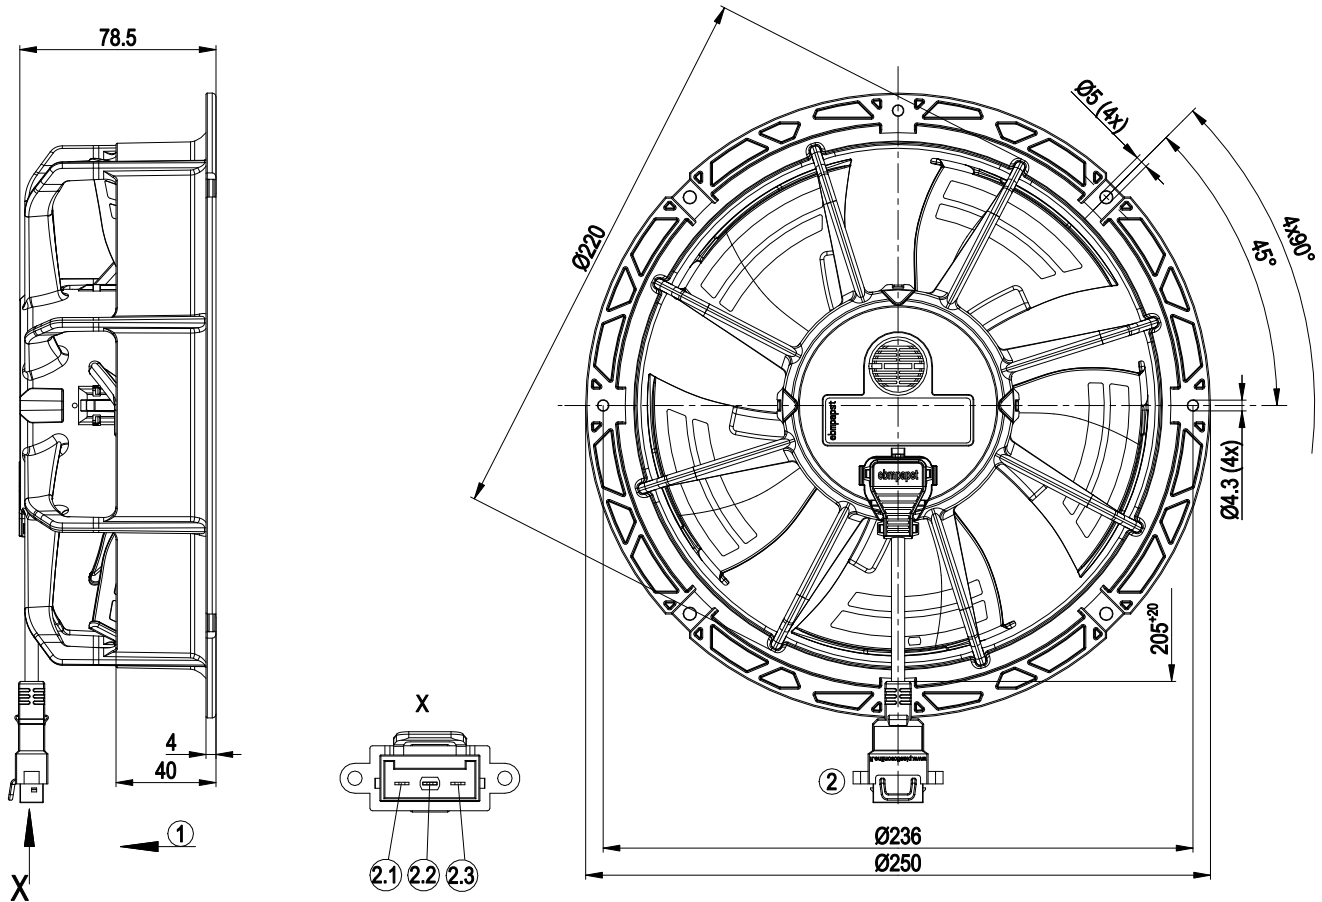


1	Direction of air flow "V"
2	Connection line PVC 3x0.5 mm ² , connector housing 3-pole Plastics P1113
2.1	PIN S, speed selection (flat connector 2.8 x 0.5)
2.2	PIN L1, phase (flat connector 2.8 x 0.5)
2.3	PIN N, neutral conductor (flat connector 2.8 x 0.5)


EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

Connection screen

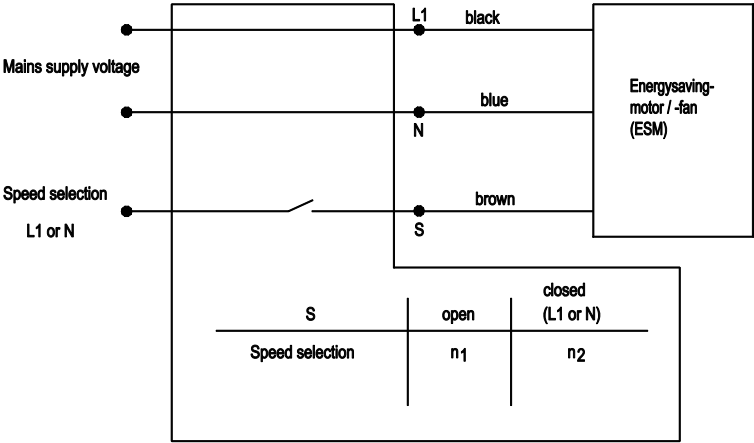

Charts: Air flow 50 Hz

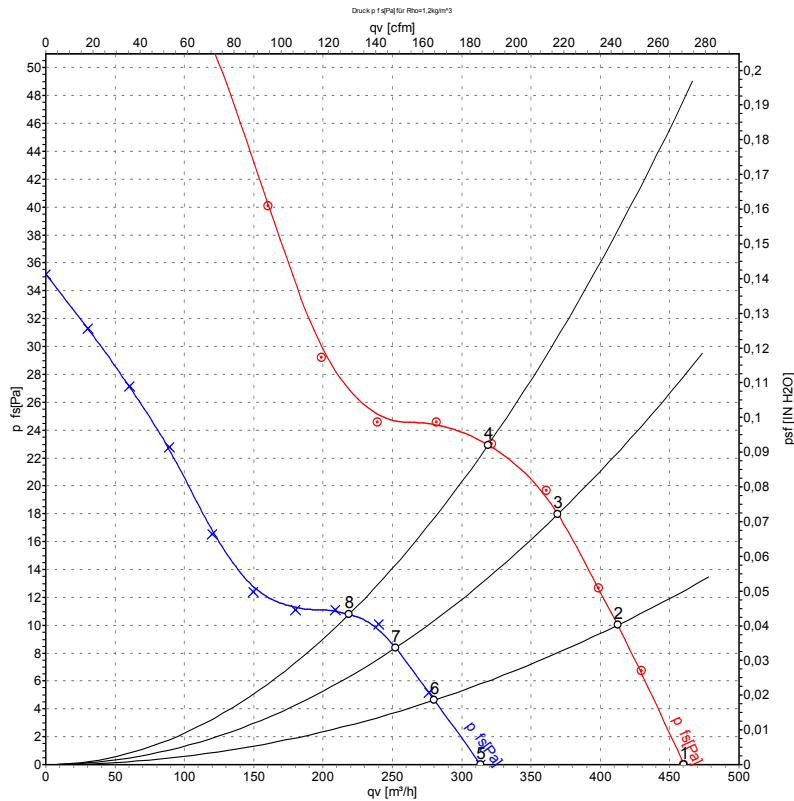

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	230	50	1300	7.0	0.06	42	50	460	0	270	0.00
2	230	50	1300	8.0	0.07	41	49	410	10	240	0.04
3	230	50	1300	8.0	0.07	40	48	370	18	215	0.07
4	230	50	1300	8.0	0.07	43	51	320	23	190	0.09
5	230	50	900	3.4	0.03	33	41	315	0	185	0.00
6	230	50	900	4.0	0.04	32	41	280	5	165	0.02
7	230	50	900	4.1	0.04	32	40	250	8	150	0.03
8	230	50	900	4.0	0.04	32	41	220	11	130	0.04

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
P_{fs} = Pressure increase