

W1G200-EC95-17

EC axial fan

sickled blades (S series)
ESM wall ring



W1G200-EC95-17 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EC95-17	
Motor	M1G055-BD	
Phase		1~
Nominal voltage	VAC	115
Nominal voltage range	VAC	115 .. 127
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1850
Power input	W	26
Current draw	A	0.4
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	0.9 kg
Size	200 mm
Material of electronics housing	PP plastic
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; CE
Approval	CSA C22.2 No.77; UL 1004-3; VDE

EC axial fan


sickled blades (S series)
ESM wall ring

Product drawing

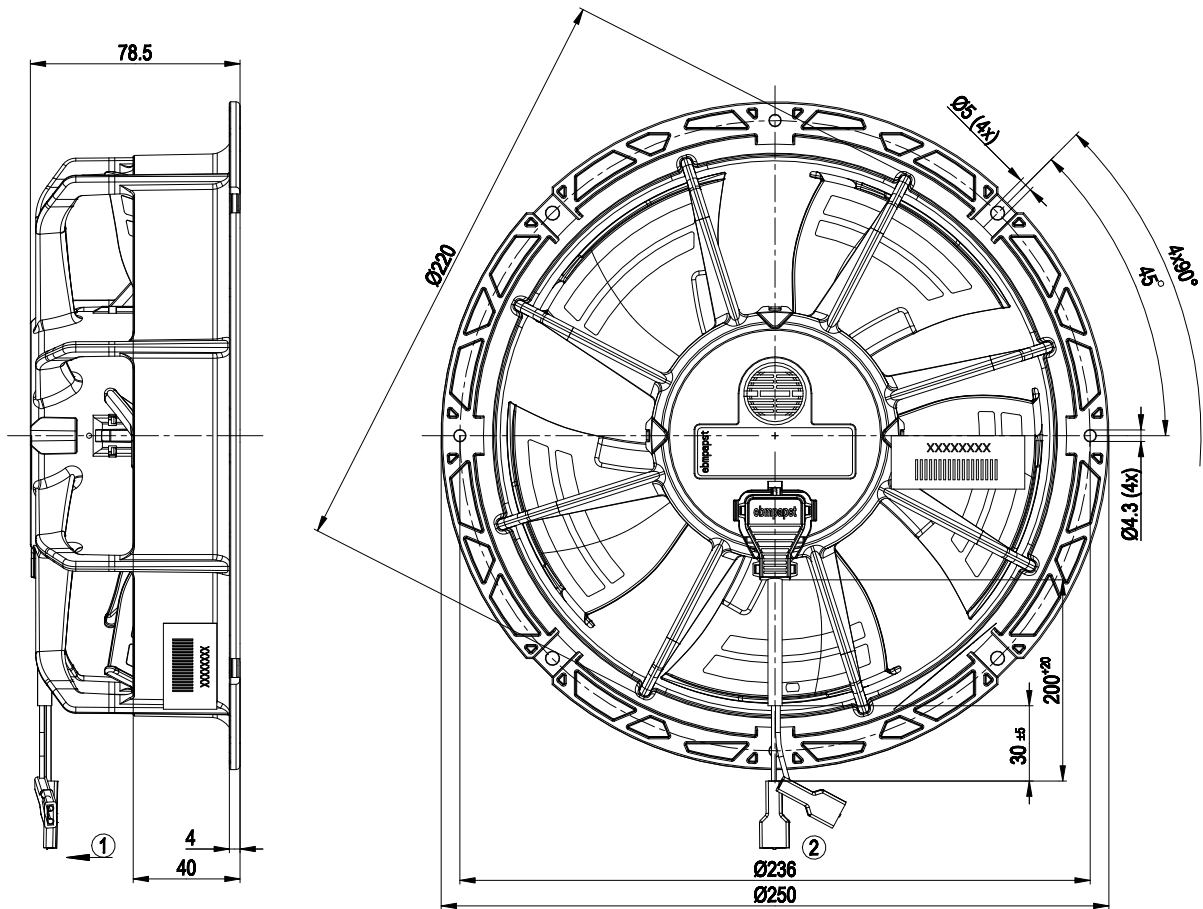


- | | |
|---|---|
| 1 | Direction of air flow "V" |
| 2 | Connection line AWG 20, 2x receptacle for tabs 6.3 x 0.8 crimped with insulating sleeve 6.3 |

Connection screen

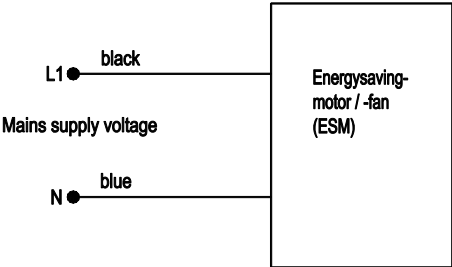

Charts: Air flow 50 Hz

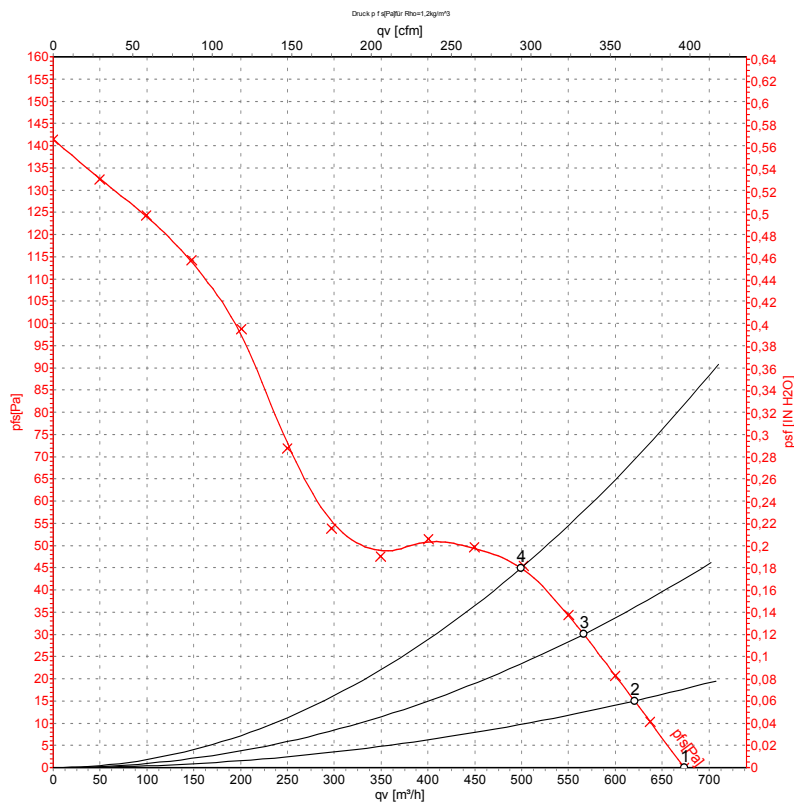

Measurement: LU-132617-1

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{WA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	qv	p _{is}	qv	p _{is}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	115	50	1850	22	0.32	675	0	395	0.00
2	115	50	1850	24	0.34	620	15	365	0.06
3	115	50	1850	25	0.37	565	30	335	0.12
4	115	50	1850	26	0.40	500	46	295	0.18

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{is} = Pressure increase

