

W1G200-EX91-01

II 3G Ex nA IIA T4 Gc (-30°C ≤ TA ≤ +40°C) X

# EC axial fan - ESM

sickle-shaped blades (S series), single-intake

ESM fan housing



W1G200-EX91-01 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142


## Nominal data

Type	W1G200-EX91-01		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Method of obtaining data			ml
Speed (rpm)	min <sup>-1</sup>	1500	2100
Power consumption	W		31
Current draw	A		0.24
Max. back pressure	Pa		55
Max. back pressure	in. wg		0.22
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	40	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



W1G200-EX91-01

 II 3G Ex nA IIA T4 Gc (-30°C ≤ TA ≤ +40°C) X

## EC axial fan - ESM

sickle-shaped blades (S series), single-intake  
ESM fan housing



### Technical description

Weight	1 kg
Size	200 mm
Motor size	55
Blade material	PA plastic
Fan housing material	PC/ABS plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Speed selection max./min.</li><li>- Soft start</li><li>- Thermal overload protection for motor</li></ul>
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	II
Conformity with standards	EN 60335-1; EN 60335-2-89; 3G; CE
Approval	3G; VDE; CSA C22.2 No. 77; UL 1004-3
Comment	Fan application category BV-3



W1G200-EX91-01

II 3G Ex nA IIA T4 Gc (-30°C ≤ TA ≤ +40°C) X


# EC axial fan - ESM

sickle-shaped blades (S series), single-intake

ESM fan housing




## Product drawing

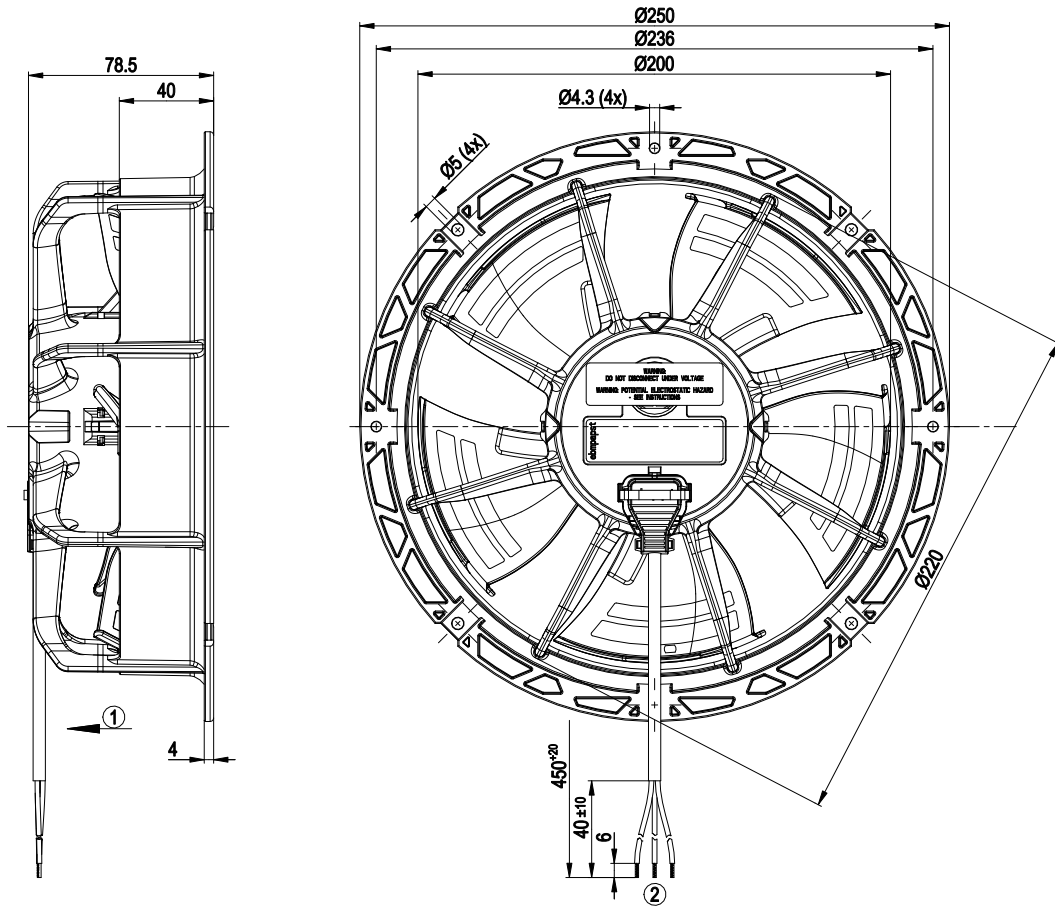


- 1 Direction of air flow "V"
- 2 Cable PVC 3x AWG20, 3x crimped splices

## Connection diagram

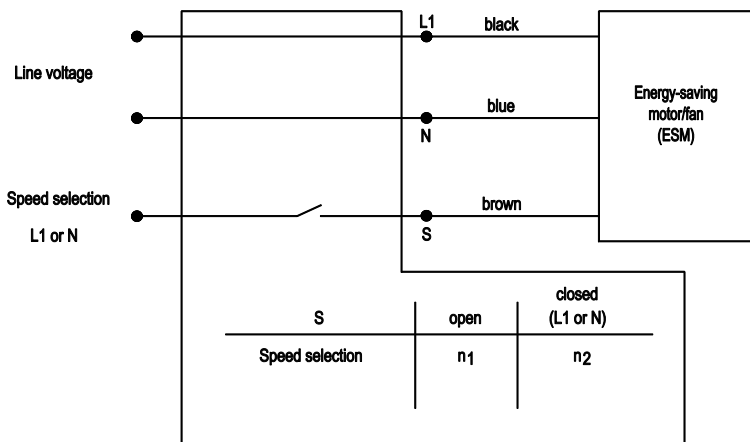



## Curves: Air performance 50 Hz

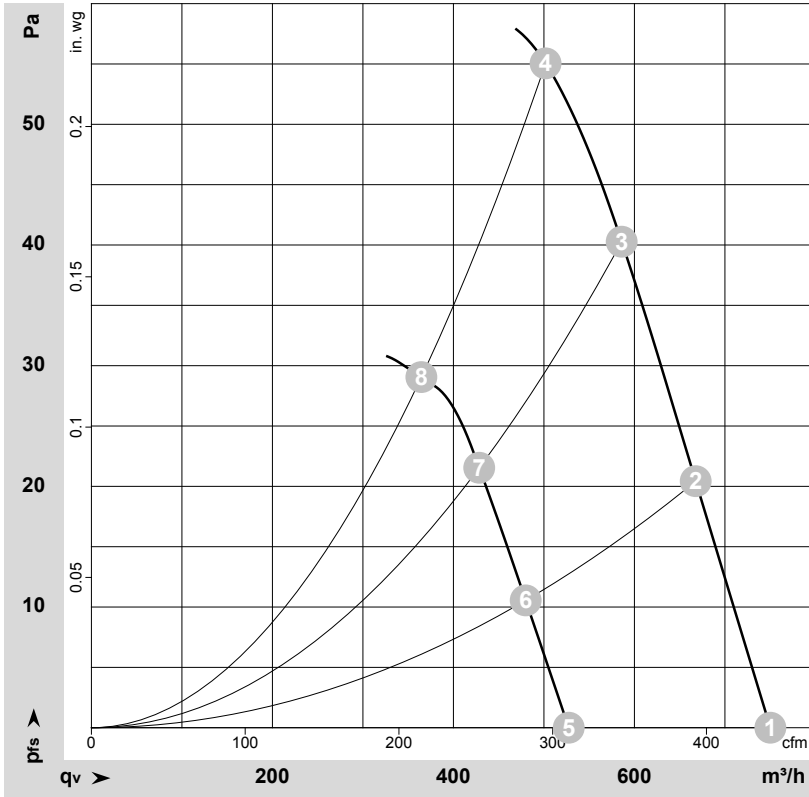

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-113351-1  
Measurement: LU-113352-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	230	50	2100	28	0.22	55	62	750	0	440	0.00
2	230	50	2100	30	0.23	54	61	670	20	395	0.08
3	230	50	2100	31	0.24	53	60	585	40	345	0.16
4	230	50	2100	31	0.24	56	64	500	55	295	0.22
5	230	50	1500	14	0.11	46	54	525	0	310	0.00
6	230	50	1500	15	0.12	46	54	480	11	285	0.04
7	230	50	1500	15	0.12	45	53	430	22	250	0.09
8	230	50	1500	15	0.12	48	56	365	29	215	0.12

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

