

W1G250-BB17-12

EC axial fan - ESM

sickle-shaped blades (S series)
ESM fan housing with guard grille



W1G250-BB17-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	W1G250-BB17-12		
Motor	M1G055-BI		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min ⁻¹	1300	1100
Power consumption	W	18	
Current draw	A	0.16	
Max. back pressure	Pa	20	
Max. back pressure	in. wg	0.08	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	1.46 kg
Size	250 mm
Motor size	55
Blade material	PA plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Speed setting input (230 V) - ESM+ expandable with plug-in module - Soft start - Thermal overload protection for motor
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	II
Conformity with standards	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	VDE; CSA C22.2 No. 77; EAC; UL 1004-3

W1G250-BB17-12

EC axial fan - ESM

sickle-shaped blades (S series)
ESM fan housing with guard grille

Product drawing

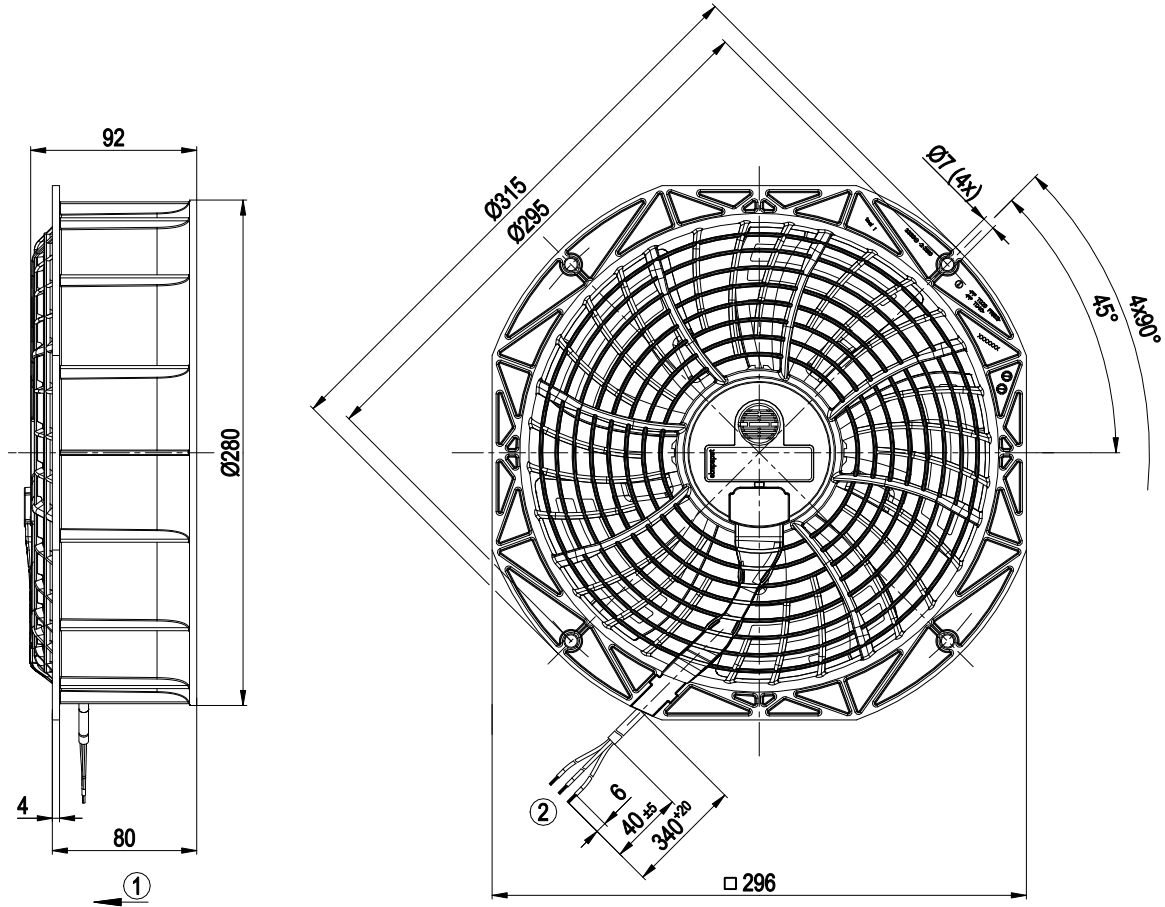


1	Airflow direction "V"
2	Cable PVC AWG20
	3x splice



EC axial fan - ESM

sickle-shaped blades (S series)
 ESM fan housing with guard grille

Connection diagram

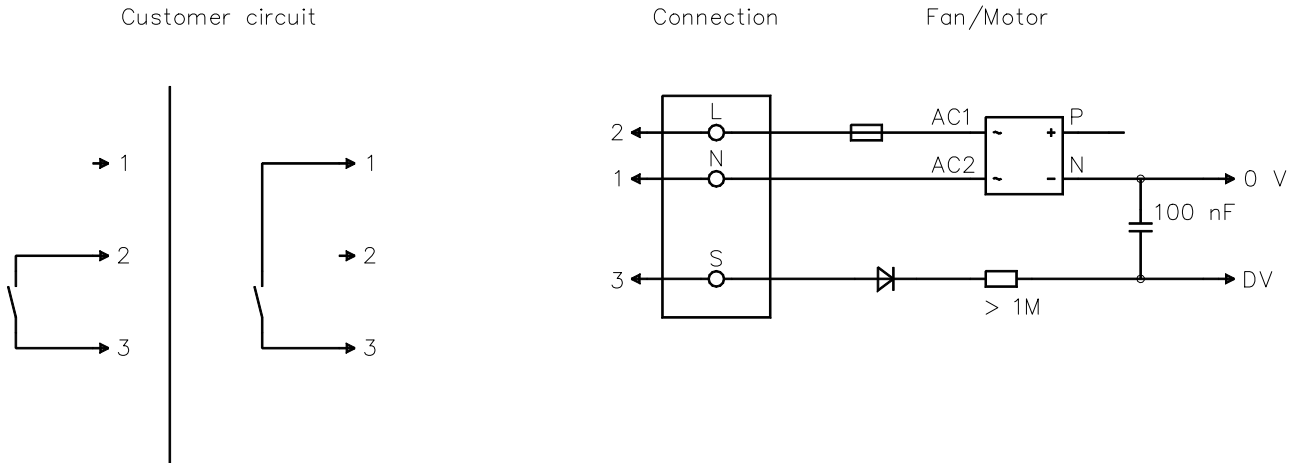


No.	Conn.	Designation	Color	Function/assignment
1	N		blue	Neutral conductor
2	L		black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
3	S		brown	Speed selection: switch open speed 1 (fast), switch closed speed 2 (slow)



EC axial fan - ESM

sickle-shaped blades (S series)
ESM fan housing with guard grille

Curves: Air performance 50 Hz

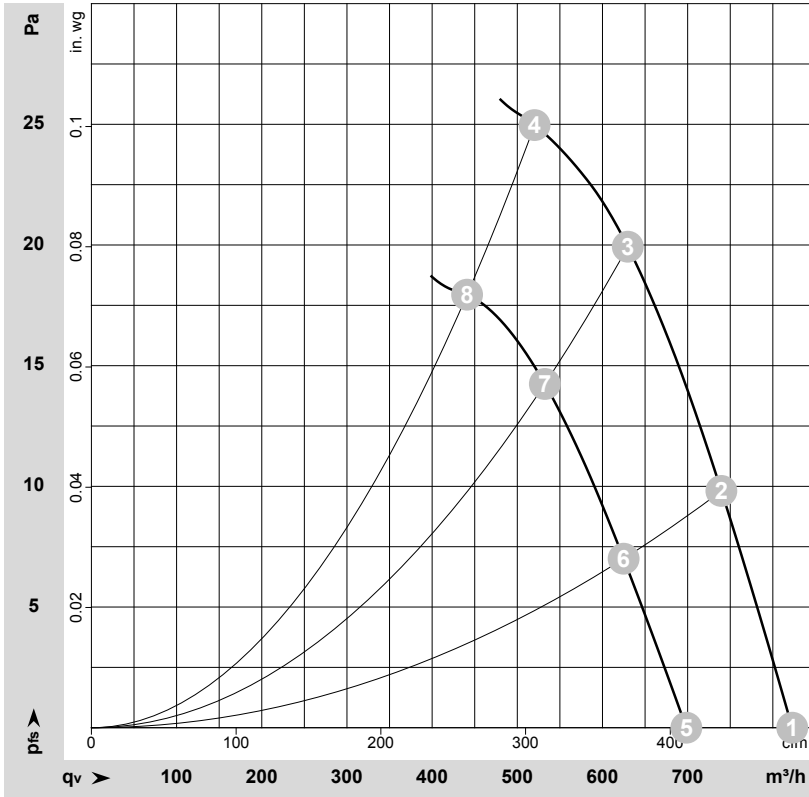

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-198545-1
Measurement: LU-198625-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
			V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	2	1~	230	50	1300	16	0.14	49	56	825	0	485	0.00
2	2	1~	230	50	1300	17	0.15	50	57	740	10	435	0.04
3	2	1~	230	50	1300	18	0.16	51	59	630	20	370	0.08
4	2	1~	230	50	1300	18	0.16	51	60	520	25	305	0.10
5	1	1~	230	50	1100	11	0.11	45	52	700	0	410	0.00
6	1	1~	230	50	1100	12	0.11	46	53	625	7	370	0.03
7	1	1~	230	50	1100	12	0.12	46	54	530	14	315	0.06
8	1	1~	230	50	1100	12	0.12	46	55	440	18	260	0.07

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

