

W1G250-CB17-03 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W1G250-CB17-03	
Motor	M1G055-BI	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1150
Power input	W	12
Current draw	A	0.11
Max. back pressure	Pa	20
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	1.6 kg
Size	250 mm
Motor size	55
Surface of rotor	Uncoated
Material of blades	PA plastic
Material of wall ring	Plastic, PP
Number of blades	5
Direction of air flow	V
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP55
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H1+
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensation drainage holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Speed adjustment input (230 V) - ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE

EC axial fan - ESM


sickled blades (S series)
Wall ring with guard grille

Product drawing

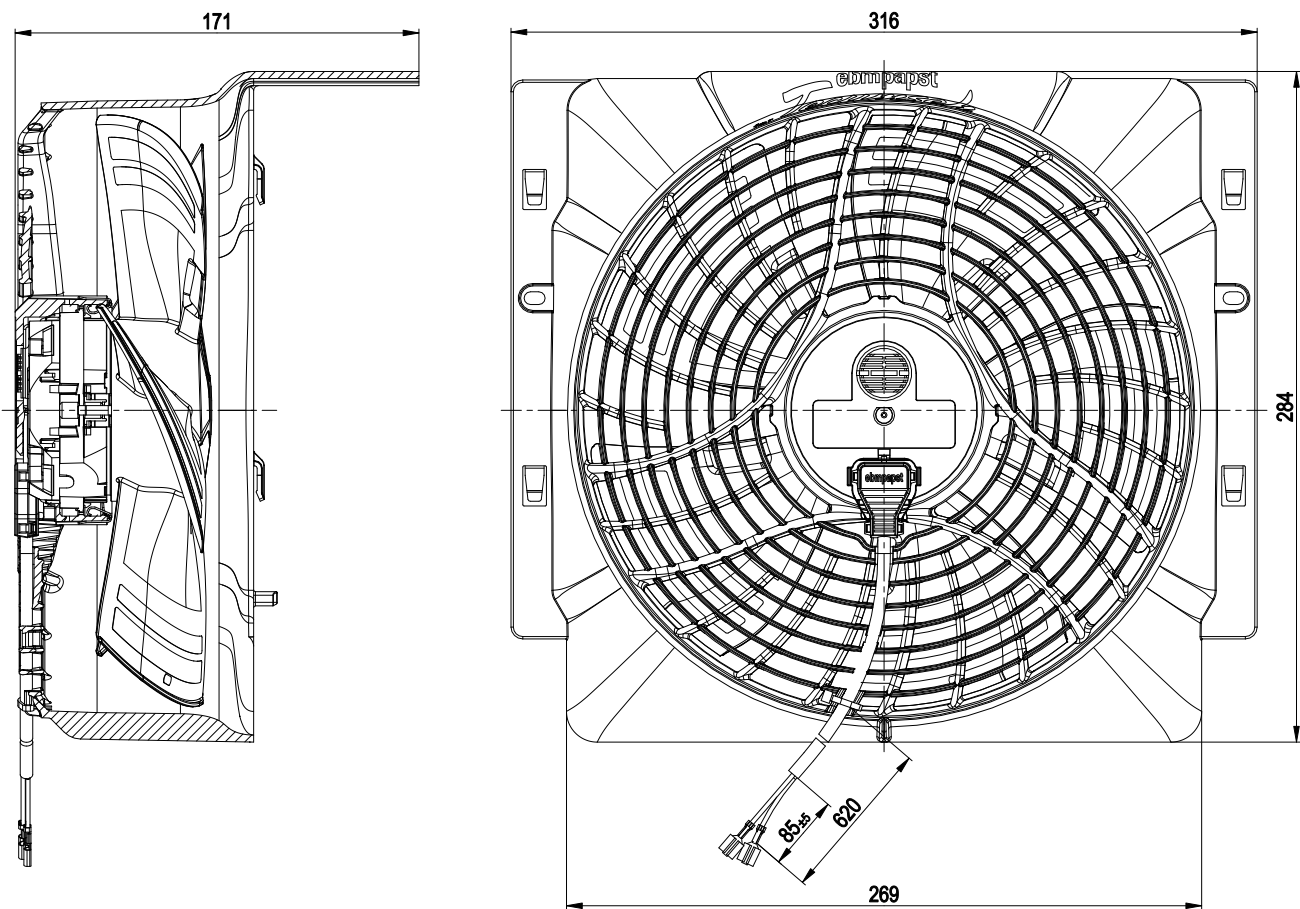

1	Direction of air flow "V"
2	Connection line AWG18
	2x threaded pin 6.3x0.8

Connection screen

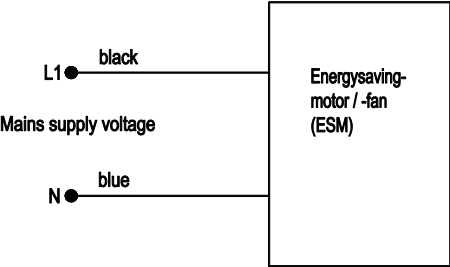


EC axial fan - ESM

sickled blades (S series)

Wall ring with guard grille

Charts: Air flow 50 Hz

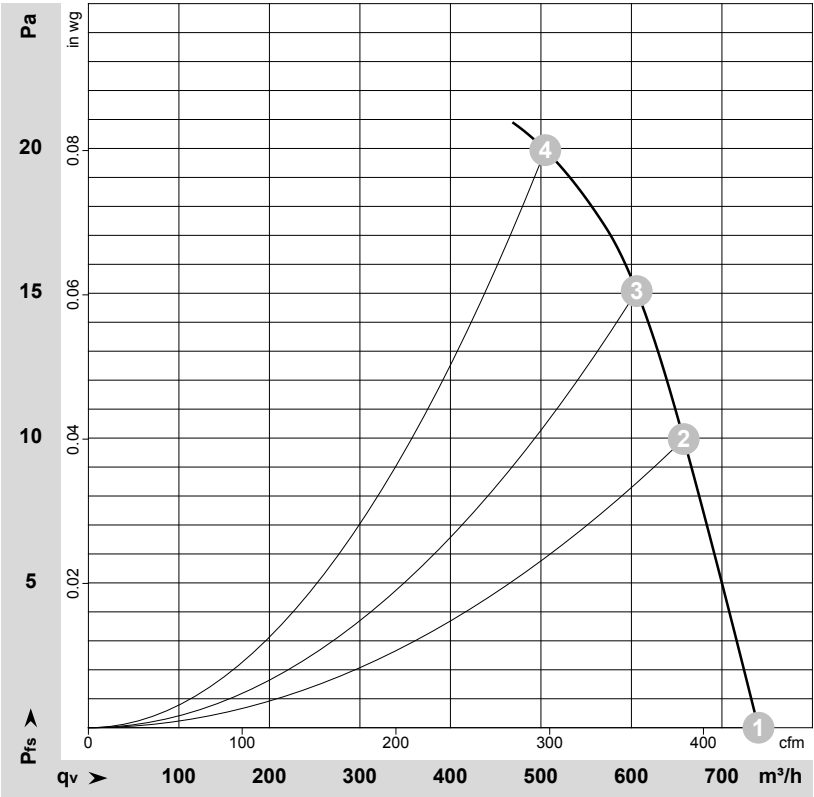

$\rho = 1.174 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-175084-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	1150	11	0.10	740	0	435	0.00
2	230	50	1150	12	0.10	660	10	385	0.04
3	230	50	1150	12	0.11	605	15	355	0.06
4	230	50	1150	12	0.11	505	20	295	0.08

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

