

W2D208-BA02-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W2D208-BA02-01			
Motor	M2D068-CF			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	400
Wiring		Y	Y	Y
Frequency	Hz	50	60	60
Method of obtaining data		fa	fa	fa
Valid for approval/standard		CE	CE	UL
Speed (rpm)	min ⁻¹	2740	3090	3090
Power consumption	W	60	80	80
Current draw	A	0.15	0.15	0.15
Min. back pressure	Pa	0	0	0
Max. back pressure	Pa	130	170	170
Min. back pressure	inH ₂ O	0	0	0
Max. back pressure	inH ₂ O	0.52	0.68	0.68
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	70	70	70
Starting current	A	0.47	0.47	0.47

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC diagonal compact fan

sickle-shaped blades (S series)

Technical description


Weight	2.8 kg
Fan size	208 mm
Rotor surface	Painted black
Impeller material	PA plastic
Fan housing material	Die-cast aluminum, painted black
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal strip, capacitor connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CCC; EAC; VDE



AC diagonal compact fan

sickle-shaped blades (S series)

Product drawing

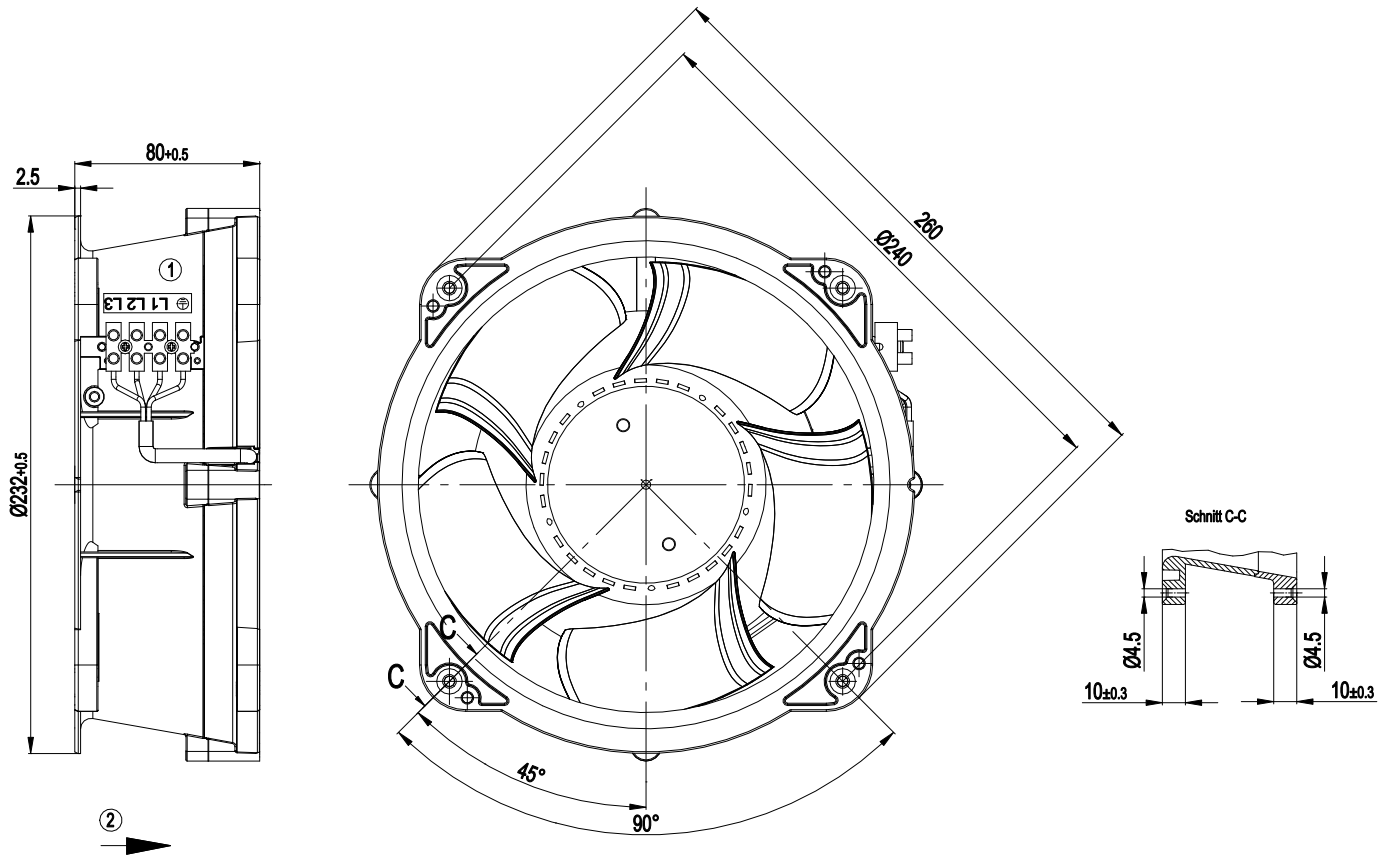


- | | |
|---|-------------------------------|
| 1 | Terminal strip: 4 connections |
| 2 | Direction of air flow "V" |

AC diagonal compact fan

sickle-shaped blades (S series)

Connection diagram




Change of rotation direction by reversing two phases

PE	green/yellow	L1	black	L2	blue
L3	brown	Y	Star connection		



AC diagonal compact fan
sickle-shaped blades (S series)

Curves: Air performance 60 Hz

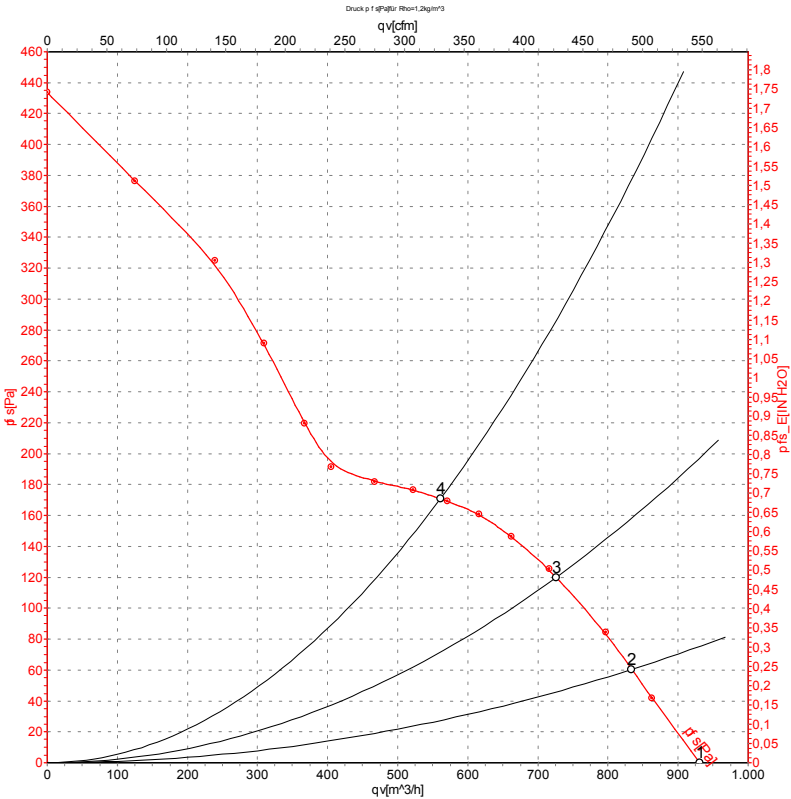

Measurement: LU-57307-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	400	60	3090	80	0.15	930	0	550	0.00
2	400	60	3015	87	0.15	835	60	490	0.24
3	400	60	2955	94	0.16	725	120	425	0.48
4	400	60	2945	94	0.16	560	170	330	0.68

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

