

AC axial fan

sickle-shaped blades (S series)

W2D208-BA14-53 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W2D208-BA14-53			
Motor	M2D068-CF			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	460
Wiring		Y	Y	Y
Frequency	Hz	50	60	60
Method of obtaining data		fa	fa	fa
Valid for approval/standard		CE	CE	CE
Speed (rpm)	min ⁻¹	2750	3100	3200
Power consumption	W	59	80	88
Current draw	A	0.15	0.14	0.15
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	70	70	70

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	2.8 kg
Fan size	208 mm
Rotor surface	Painted black
Impeller material	PA plastic
Fan housing material	Die-cast aluminum, painted black
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-1; CSA C22.2 No. 100



AC axial fan
sickle-shaped blades (S series)

Product drawing

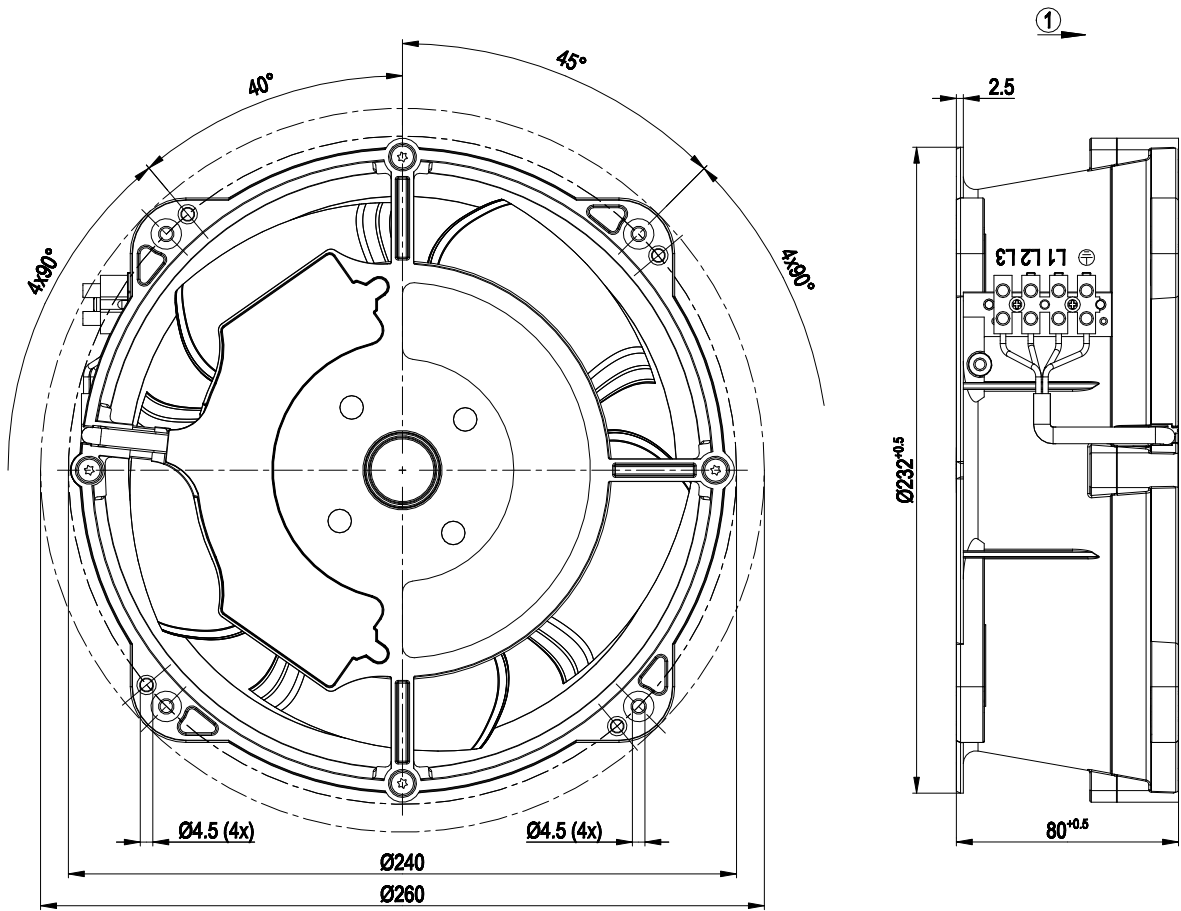


1 Direction of air flow "V"



AC axial fan

sickle-shaped blades (S series)

Connection diagram




Change of rotation direction by reversing two phases

PE	green/yellow	L1	black	L2	blue
L3	brown	Y	Star connection		



AC axial fan
sickle-shaped blades (S series)

Curves: Air performance 50 Hz

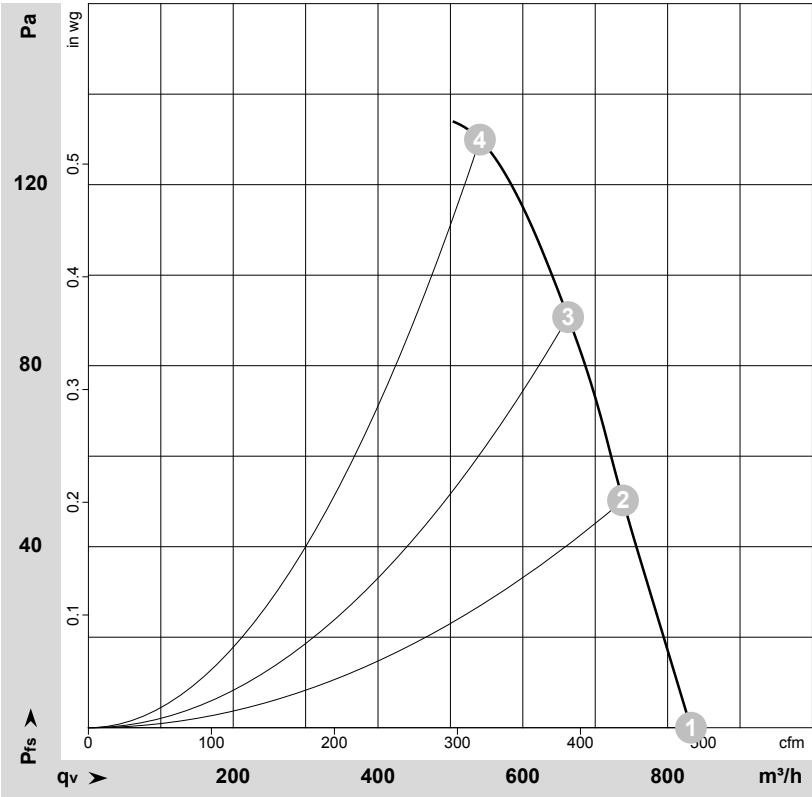

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-112975-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values


	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	400	50	2750	59	0.15	830	0	490	0.00
2	400	50	2710	66	0.15	740	50	435	0.20
3	400	50	2690	69	0.15	665	90	390	0.36
4	400	50	2680	70	0.15	540	130	320	0.52

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickle-shaped blades (S series)

Curves: Air performance 60 Hz

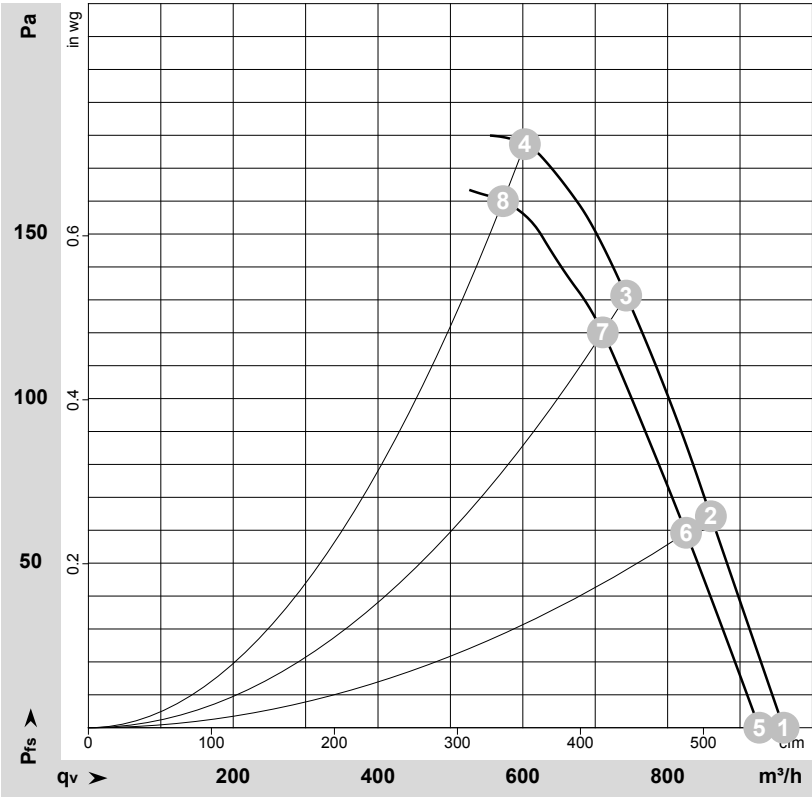

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-112978-1
Measurement: LU-112976-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	460	60	3200	88	0.15	960	0	565	0.00
2	460	60	3155	97	0.16	860	64	505	0.26
3	460	60	3110	104	0.17	745	131	435	0.53
4	460	60	3105	104	0.17	605	179	355	0.72
5	400	60	3100	80	0.14	925	0	545	0.00
6	400	60	3020	88	0.15	825	60	485	0.24
7	400	60	2965	95	0.16	710	120	420	0.48
8	400	60	2970	94	0.16	575	160	335	0.64

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

