

W2E143-AB73-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                             |                   |         |         |
|-----------------------------|-------------------|---------|---------|
| Type                        | W2E143-AB73-11    |         |         |
| Motor                       | M2E052-BF         |         |         |
| Phase                       |                   | 1~      | 1~      |
| Nominal voltage             | VAC               | 200     | 200     |
| Frequency                   | Hz                | 50      | 60      |
| Method of obtaining data    |                   | fa      | fa      |
| Valid for approval/standard |                   | CE      | CE      |
| Speed (rpm)                 | min <sup>-1</sup> | 2800    | 3250    |
| Power consumption           | W                 | 27      | 29      |
| Current draw                | A                 | 0.15    | 0.15    |
| Capacitor                   | μF                | 1       | 1       |
| Capacitor voltage           | VDB               | 400     | 400     |
| Capacitor standard          |                   | S0 (CE) | S0 (CE) |
| Max. back pressure          | Pa                | 55      | 70      |
| Max. back pressure          | in. wg            | 0.22    | 0.28    |
| Min. ambient temperature    | °C                | -25     | -25     |
| Max. ambient temperature    | °C                | 60      | 80      |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



## Technical description


|                                                                            |                                                                                                                |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 0.9 kg                                                                                                         |
| Size                                                                       | 143 mm                                                                                                         |
| Motor size                                                                 | 52                                                                                                             |
| Rotor surface                                                              | Painted black                                                                                                  |
| Blade material                                                             | Sheet steel, painted black                                                                                     |
| Fan housing material                                                       | Die-cast aluminum, painted black                                                                               |
| Number of blades                                                           | 5                                                                                                              |
| Airflow direction                                                          | V                                                                                                              |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                                                                          |
| Degree of protection                                                       | IP20                                                                                                           |
| Insulation class                                                           | "B"                                                                                                            |
| Moisture (F) / Environmental (H) protection class                          | H0+                                                                                                            |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                                                                        |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                        |
| Installation position                                                      | Any                                                                                                            |
| Mode                                                                       | S1                                                                                                             |
| Motor bearing                                                              | Ball bearing                                                                                                   |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                                                                      |
| Electrical hookup                                                          | Plug                                                                                                           |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                          |
| Protection class                                                           | Built-in component with basic insulation, protection class results from installation according to intended use |
| Motor capacitor according to EN 60252-1 in safety protection class         | S0                                                                                                             |
| Conformity with standards                                                  | EN 60034-1; EN 60204-1; EN 60335-1; CE                                                                         |



## AC axial compact fan


sickle-shaped blades (S series)

## Product drawing

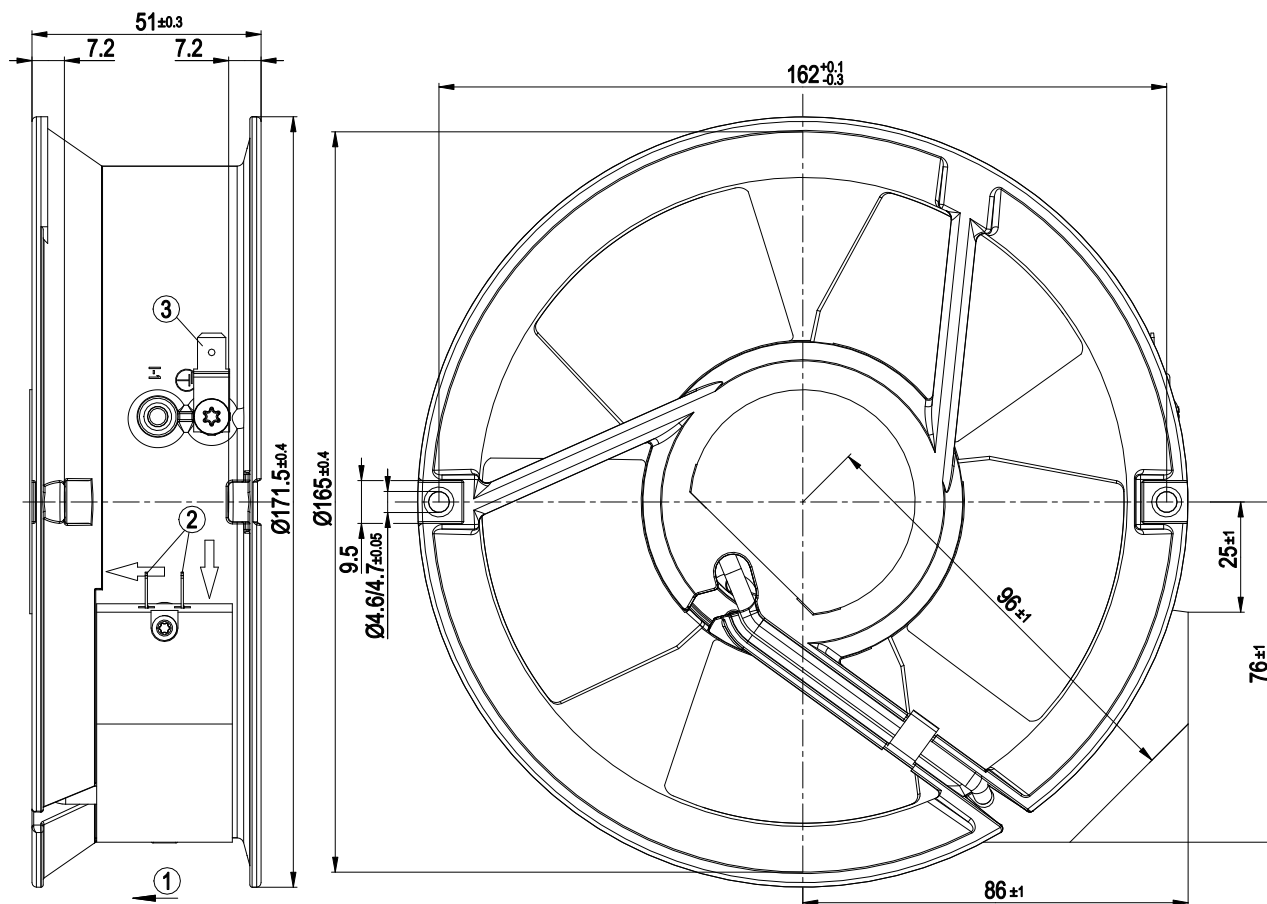


- |   |                                |
|---|--------------------------------|
| 1 | Airflow direction "V"          |
| 2 | Flat plug 2.8 x 0.5 mm         |
| 3 | for ground conductor fastening |

## Connection diagram

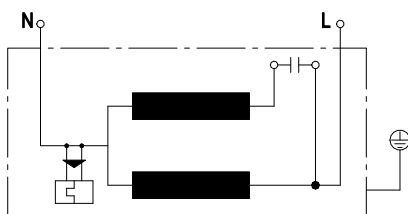

AC axial compact fan  
sickle-shaped blades (S series)

Curves: Air performance 50 Hz

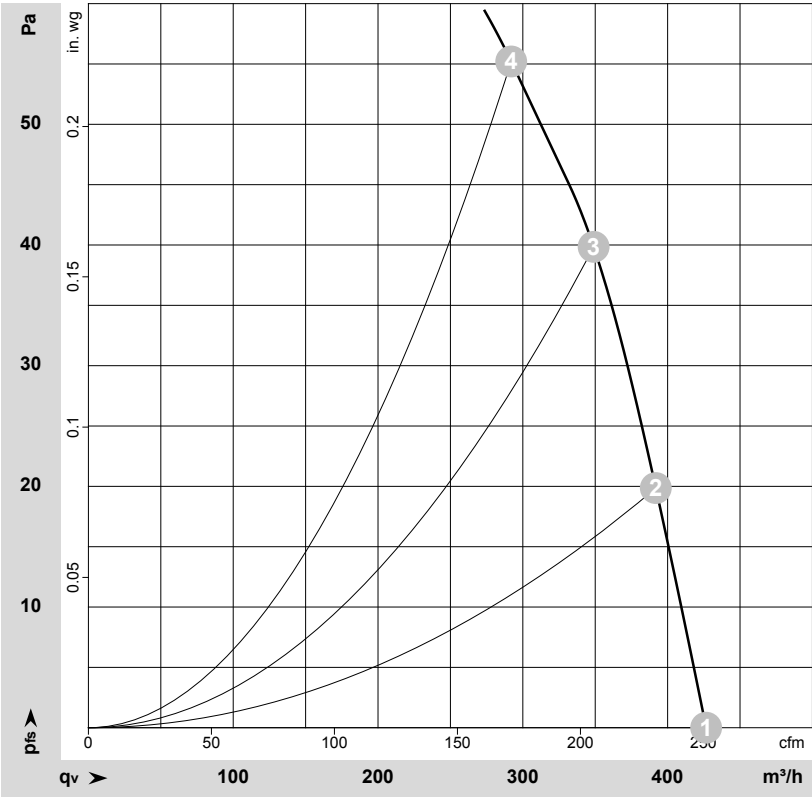

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-76132-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values


|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | in. wg          |
| 1 | 1~    | 200 | 50 | 2800              | 27             | 0.15 | 425            | 0               | 250            | 0.00            |
| 2 | 1~    | 200 | 50 | 2770              | 28             | 0.15 | 390            | 20              | 230            | 0.08            |
| 3 | 1~    | 200 | 50 | 2755              | 28             | 0.16 | 350            | 40              | 205            | 0.16            |
| 4 | 1~    | 200 | 50 | 2740              | 29             | 0.16 | 290            | 55              | 170            | 0.22            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



AC axial compact fan  
sickle-shaped blades (S series)

Curves: Air performance 60 Hz

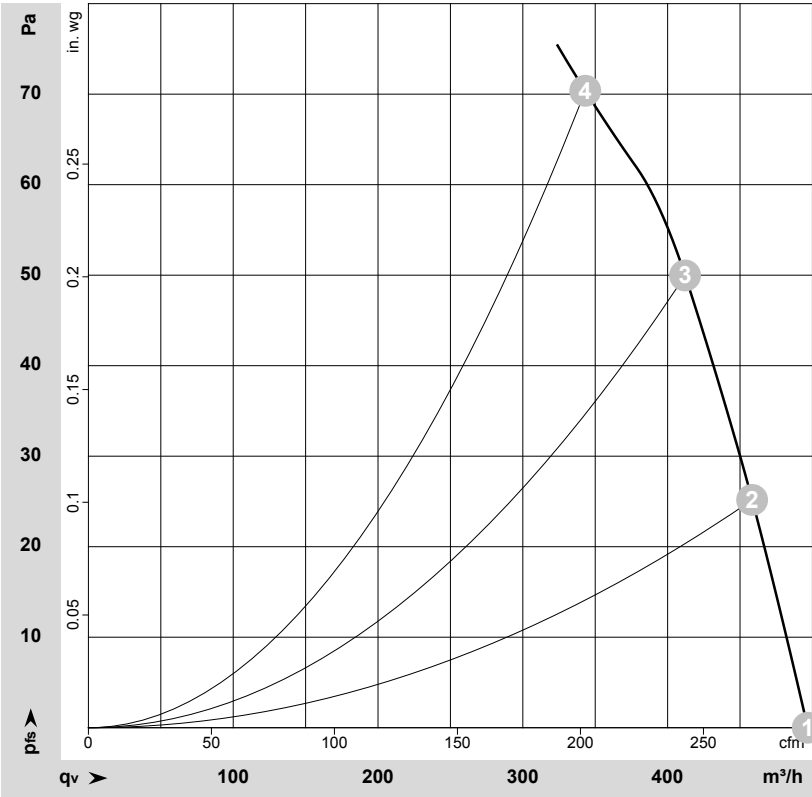

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-76133-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 1~    | 200 | 60 | 3250              | 29             | 0.15 | 495               | 0               | 295            | 0.00            |
| 2 | 1~    | 200 | 60 | 3210              | 31             | 0.15 | 460               | 25              | 270            | 0.10            |
| 3 | 1~    | 200 | 60 | 3180              | 32             | 0.16 | 410               | 50              | 240            | 0.20            |
| 4 | 1~    | 200 | 60 | 3135              | 33             | 0.16 | 345               | 70              | 200            | 0.28            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

