

W2G110-AK67-24 ebmpapst Datasheet FansCo

sales@fansco.com

www.fansco.com

Nominal data

Type	W2G110-AK67-24	
Motor	M2G045-BA	
Nominal voltage	VDC	12
Nominal voltage range	VDC	8 .. 14
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	4400
Power consumption	W	17
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	72

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	0.5 kg
Fan size	110 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Fan housing material	Die-cast aluminum, painted black
Number of blades	5
Airflow direction	"A"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP42; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Electrical hookup	With plug
Motor protection	Reverse polarity and locked-rotor protection
Conformity with standards	EN 60950-1
Approval	UL 507; CSA C22.2 No. 113; EAC




Product drawing

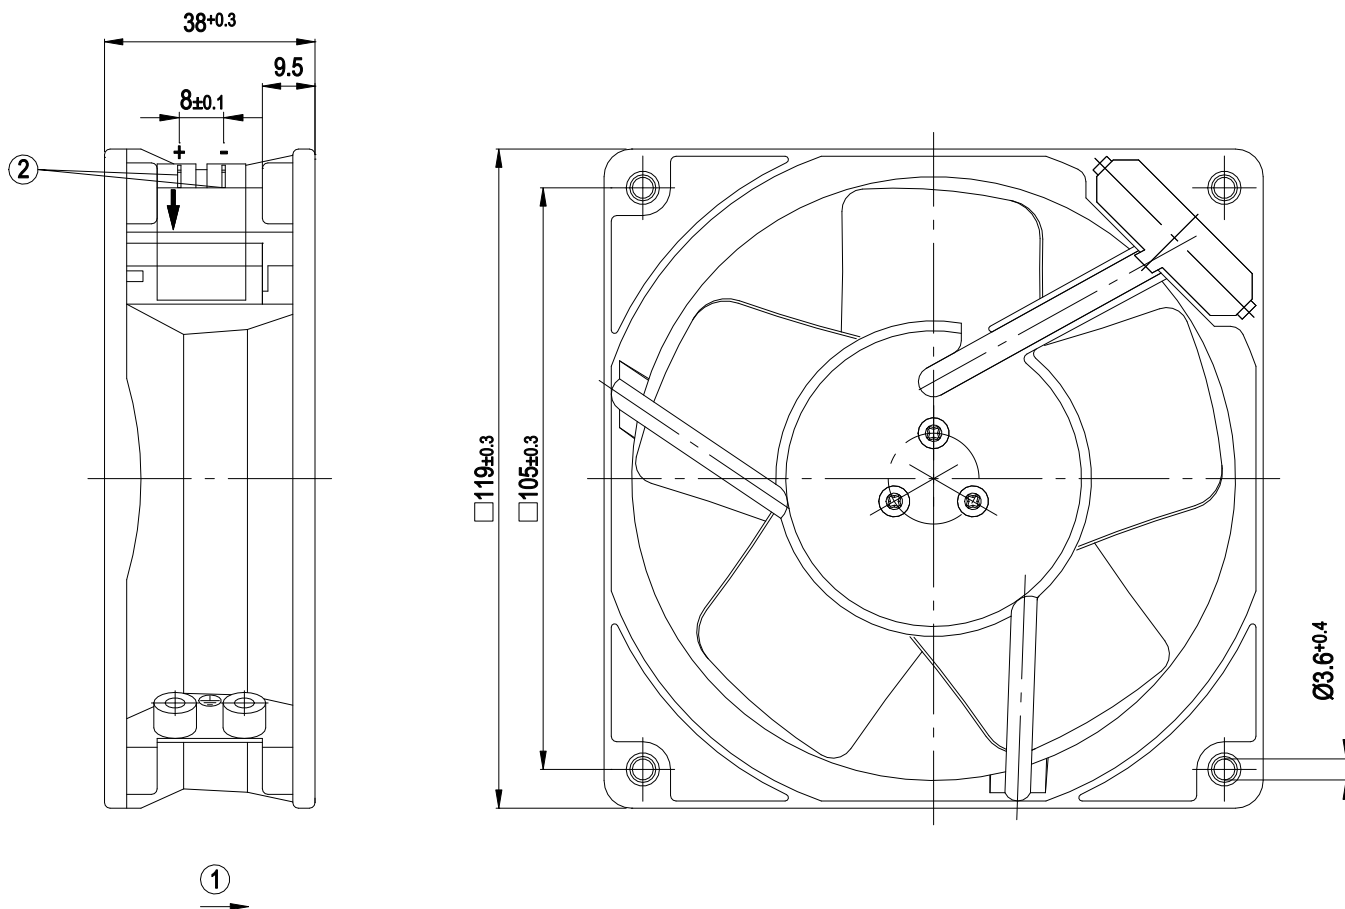

- | | |
|---|---|
| 1 | Direction of air flow "A" |
| 2 | 2x flat plug 2.8 x 0.5 (AMP no. 170058-2) |




Connection diagram

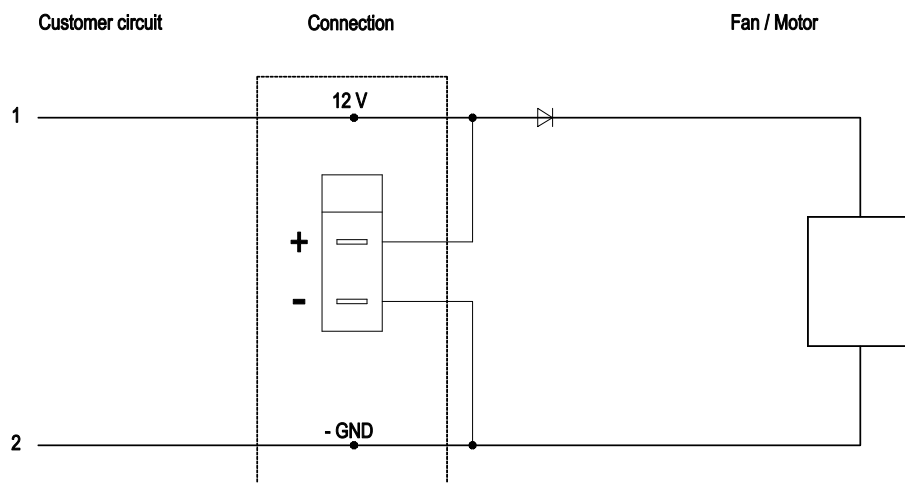

No.	Conn.	Designation	Color	Function/assignment
1	1	UN +12V	red	Power supply +12 V / see nameplate for voltage range, maximum ripple $\pm 3.5\%$
1	2	GND	blue	Reference ground

Curves: Air performance

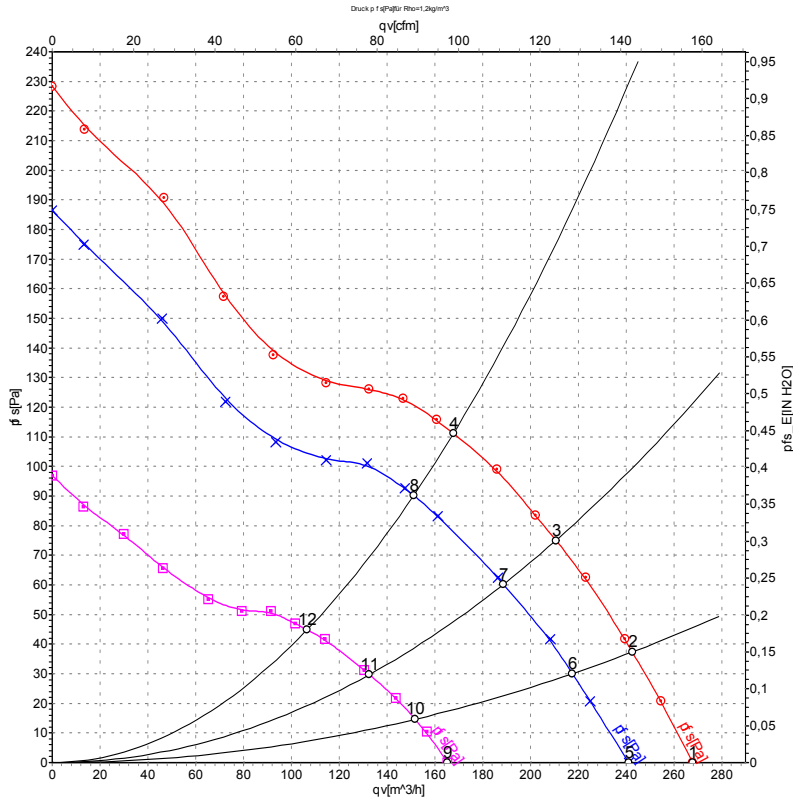

Measurement: LU-14202-1
 Measurement: LU-14201-1
 Measurement: LU-14203-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	14	4985	22	1.60	270	0	160	0.00
2	14	4840	23	1.65	245	37	145	0.15
3	14	4695	24	1.70	210	75	125	0.30
4	14	4570	24	1.73	170	111	100	0.45
5	12	4400	17	1.27	240	0	140	0.00
6	12	4325	17	1.36	220	30	130	0.12
7	12	4195	17	1.41	190	60	110	0.24
8	12	4095	18	1.49	150	90	90	0.36
9	8	3085	4.9	0.61	165	0	95	0.00
10	8	3025	5.7	0.71	150	15	90	0.06
11	8	2965	6.4	0.81	135	30	80	0.12
12	8	2910	6.5	0.81	105	45	65	0.18

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

