

W3G300-BV25-24

EC axial fan

with brushless DC motor
Automotive



W3G300-BV25-24 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G300-BV25-24	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	3940
Power consumption	W	380
Current draw	A	14.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85
-with power derating to	°C	110

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description

Weight	2.0 kg
Size	300 mm
Motor size	84
Impeller material	PA plastic UL94 HB (black)
Fan housing material	PA plastic UL94 HB (black)
Number of blades	7
Airflow direction	V
Balancing grade according to DIN ISO 1940-1	G 10
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K; (Motor); electronics IP 6K9K
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H4
Ambient temperature note	Over +85 °C with power derating
Max. permitted ambient temp. for motor (transport/storage)	+110 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor mounting	Ball bearing
Motor bearing	(sealed)
Life expectancy	40,000 h (typical)
Technical features	- Lowering input - Fault output (high-side switch max. 30 mA) - INVLIN (inverse linear control input) - Power limiter - Load dump (58 V) - Motor current limitation - Soft start - Control input 0-10 VDC/PWM - Temperature derating - Overvoltage detection - Thermal overload protection for electronics - Undervoltage detection
EMC regulations	According to ECE R10 Rev. 3
Electrical hookup	Plug; Standby current less than 500 µA
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral
Approval	E1
Sound level	87 dB(A), sound power level according to ISO 13347
Comment	Type approval number – 036433




EC axial fan

with brushless DC motor

Automotive

Product drawing

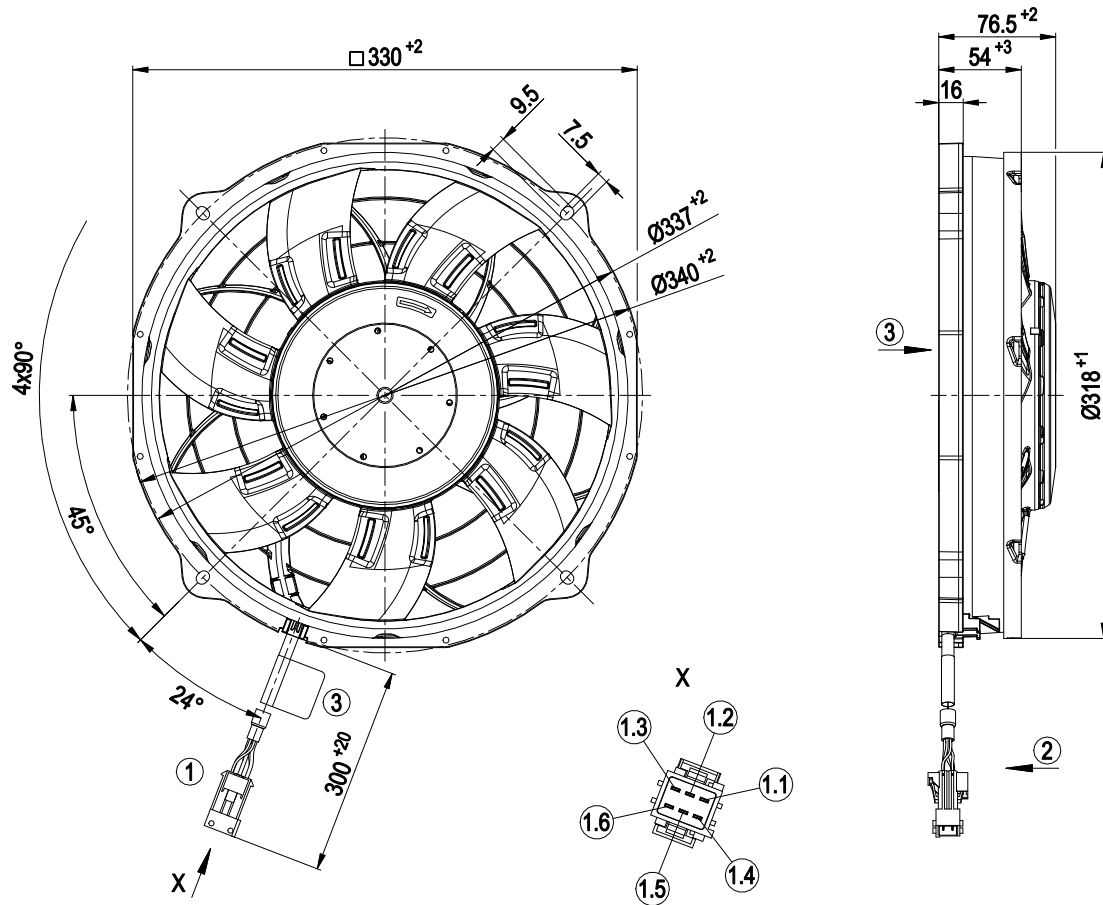


1	Cable with 6-pole coded plug tyco Junior Power Timer 1-962349-1
	cable (460 mm) with mating connector, part no. 02002-4-1021 not included in scope of delivery
1.1	+ UB (black)
1.2	GND (brown)
1.3	PWM/LIN (yellow)
1.4	INVLIN (orange)
1.5	ABSENK (blue)
1.6	Diagnostic output (white)
2	Airflow direction "V"
3	Rating label



EC axial fan

with brushless DC motor
Automotive

Connection diagram

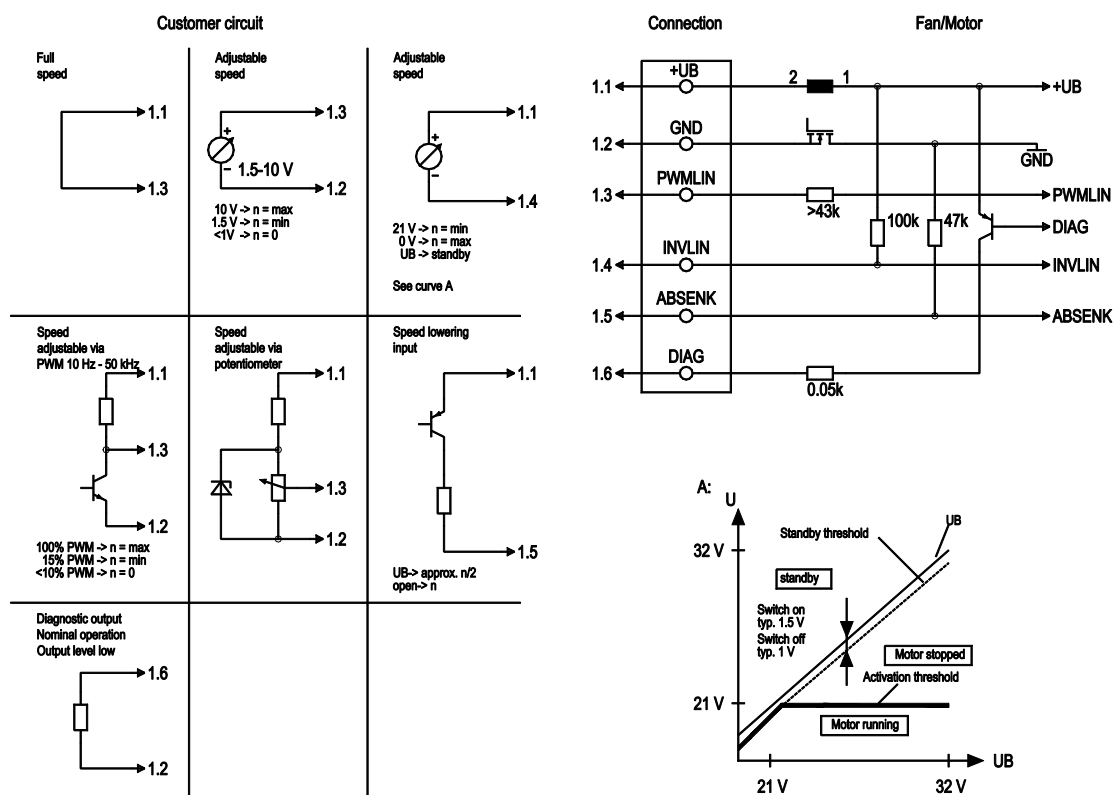


No.	Conn.	Designation	Function/assignment
	1.1	+UB	Power supply
	1.2	GND	Power supply GND, reference ground
	1.3	PWMLIN	Analog voltage control input 0-10 V or PWM
	1.4	INVLIN	Control input, inverse linear
	1.5	ABSENK	Lowering input
	1.6	DIAG	Diagnostic output



EC axial fan

with brushless DC motor
Automotive

Curves: Air performance

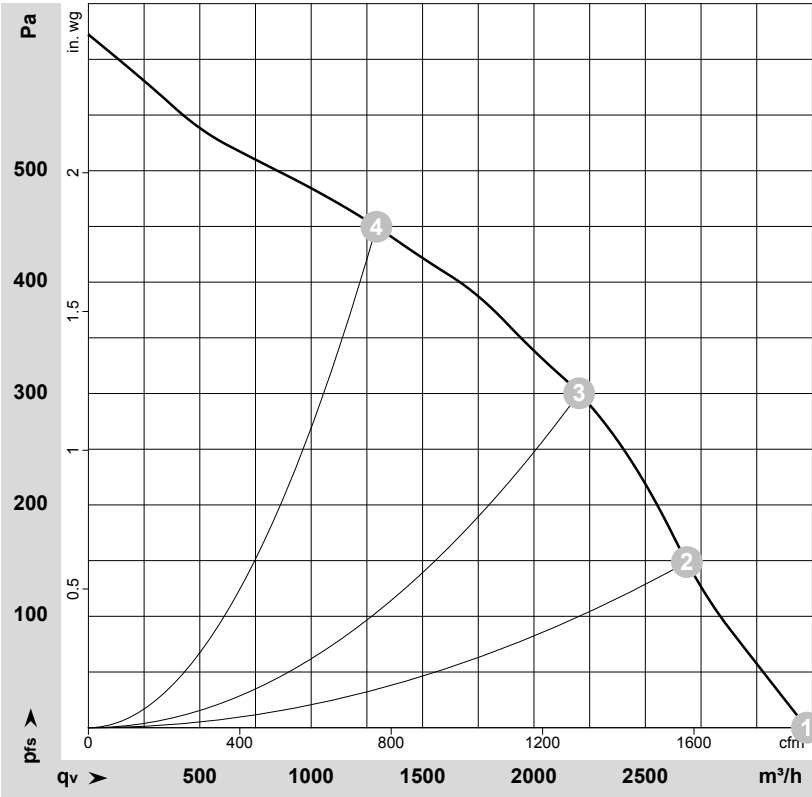

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-141116-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	26	3940	380	14.60	79	87	3225	0	1900	0.00
2	26	3820	405	15.55	79	87	2685	150	1580	0.60
3	26	3725	460	17.63	78	86	2205	300	1295	1.20
4	26	3620	504	19.36	82	89	1295	450	760	1.81

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
p_{fs} = Pressure increase

