

# EC axial fan

sickled blades (S series), single inlet  
Wall ring with guard grille

W3G300-CN02-40 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | W3G300-CN02-40    |            |
| Motor                    | M3G074-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2020       |
| Power input              | W                 | 170        |
| Current draw             | A                 | 1.35       |
| Max. back pressure       | Pa                | 140        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 43.1   | 28.6         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 54.5   | 40           |
| 05 Variable speed drive           |   | Yes    |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power input $P_{ed}$       | kW                | 0.16 |
| 09 Air flow $q_v$             | m³/h              | 1795 |
| 09 Pressure increase $p_{fs}$ | Pa                | 128  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 2060 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-138597



# EC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

## Technical features

|                                                                    |                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 4.1 kg                                                                                                                                                                                                                                                                                                      |
| Size                                                               | 300 mm                                                                                                                                                                                                                                                                                                      |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic                                                                                                                                                                                                                                                     |
| Material of wall ring                                              | Sheet steel, galvanised and coated in black plastic (RAL 9005)                                                                                                                                                                                                                                              |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                                                                                                                                                                                                                                                                    |
| Number of blades                                                   | 5                                                                                                                                                                                                                                                                                                           |
| Direction of air flow                                              | "V"                                                                                                                                                                                                                                                                                                         |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                                                                                                                                                                                                                                                            |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                       |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                         |
| Humidity (F)/environmental protection class (H)                    | F3-1                                                                                                                                                                                                                                                                                                        |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                     |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                     |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                         |
| Condensate discharge holes                                         | None, open rotor                                                                                                                                                                                                                                                                                            |
| Cooling bore / aperture                                            | Rotor-side                                                                                                                                                                                                                                                                                                  |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                          |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> </ul> |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                   |
| Motor protection                                                   | PTC resistor                                                                                                                                                                                                                                                                                                |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                    |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                            |
| Product conforming to standard                                     | EN 60335-1; CE                                                                                                                                                                                                                                                                                              |
| Approval                                                           | C22.2 Nr.77 + CAN/CSA-E60730-1; UL 1004-7 + 60730                                                                                                                                                                                                                                                           |




# EC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

## Product drawing

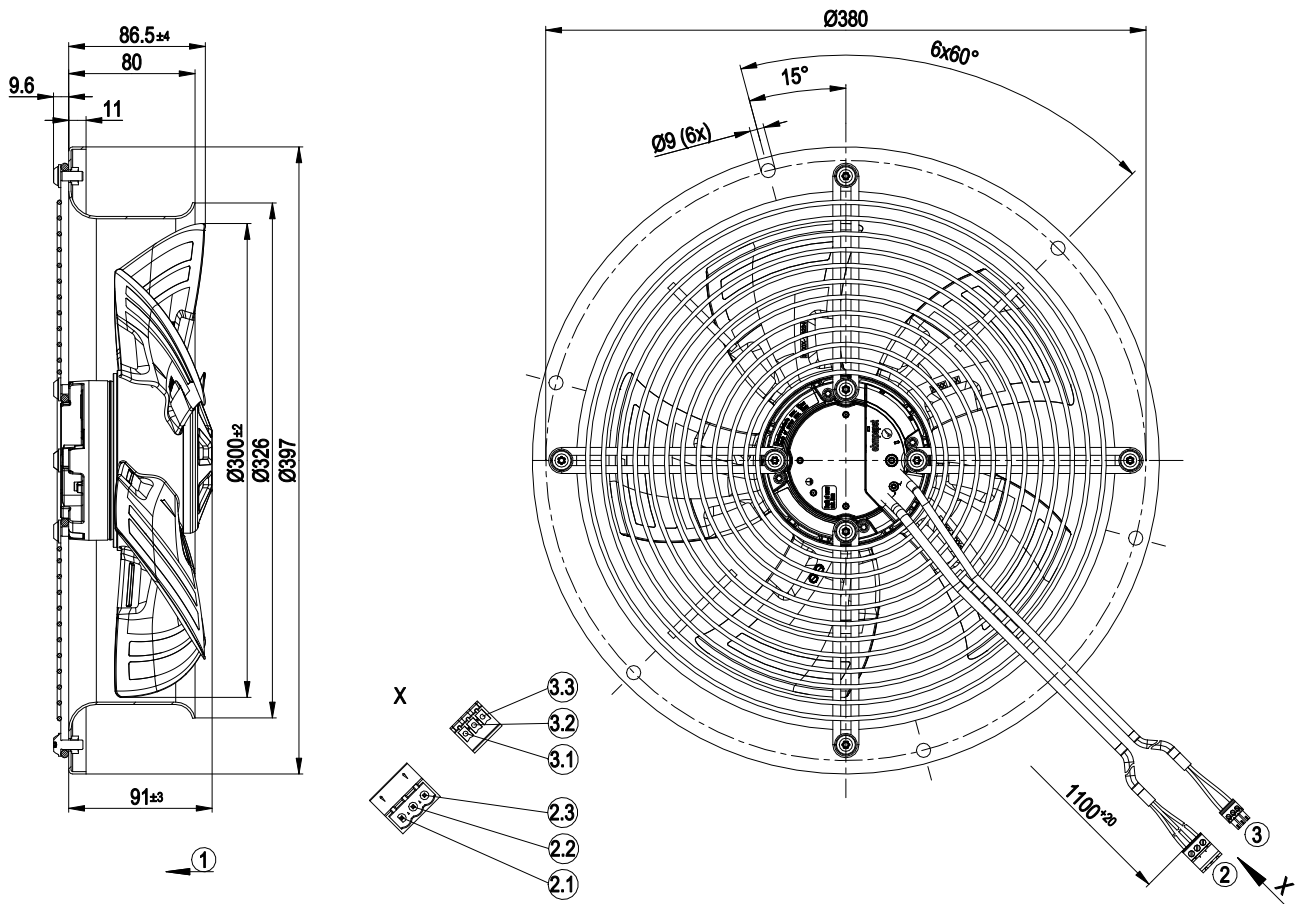


|     |                                                                              |
|-----|------------------------------------------------------------------------------|
| 1   | Direction of air flow "V"                                                    |
| 2   | Connection line PVC AWG20, 3-pole connector housing Phoenix IC 2.5/3-ST-5.08 |
| 2.1 | N (blue)                                                                     |
| 2.2 | L (black)                                                                    |
| 2.3 | PE (green/yellow)                                                            |
| 3   | Connection line PVC AWG22, 3-pole connector housing Phoenix MC 1.5/3-ST-3.81 |
| 3.1 | GND (blue)                                                                   |
| 3.2 | not used                                                                     |
| 3.3 | 0-10 V PWM (yellow)                                                          |

# EC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

## Connection screen

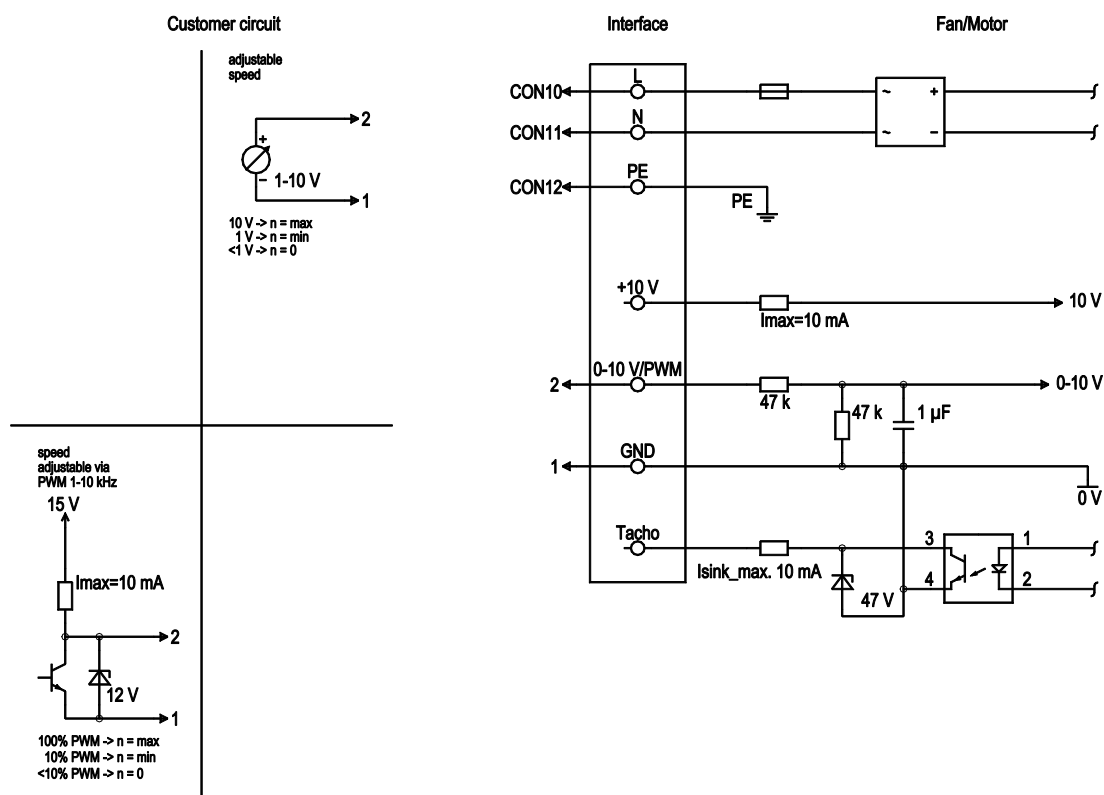


| No. | Conn. | Designation | Colour       | Function / assignment                                                               |
|-----|-------|-------------|--------------|-------------------------------------------------------------------------------------|
|     | CON10 | L           | black        | Mains connection, power supply, phase, see type plate for voltage range             |
|     | CON11 | N           | blue         | Mains connection, power supply, neutral conductor, see type plate for voltage range |
|     | CON12 | PE          | green/yellow | Earth connection                                                                    |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V/PWM control input, Ri=100 kΩ, SELV                                           |
|     | 1     | GND         | blue         | Signal ground for control interface, SELV                                           |

## EC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

## Charts: Air flow 50 Hz

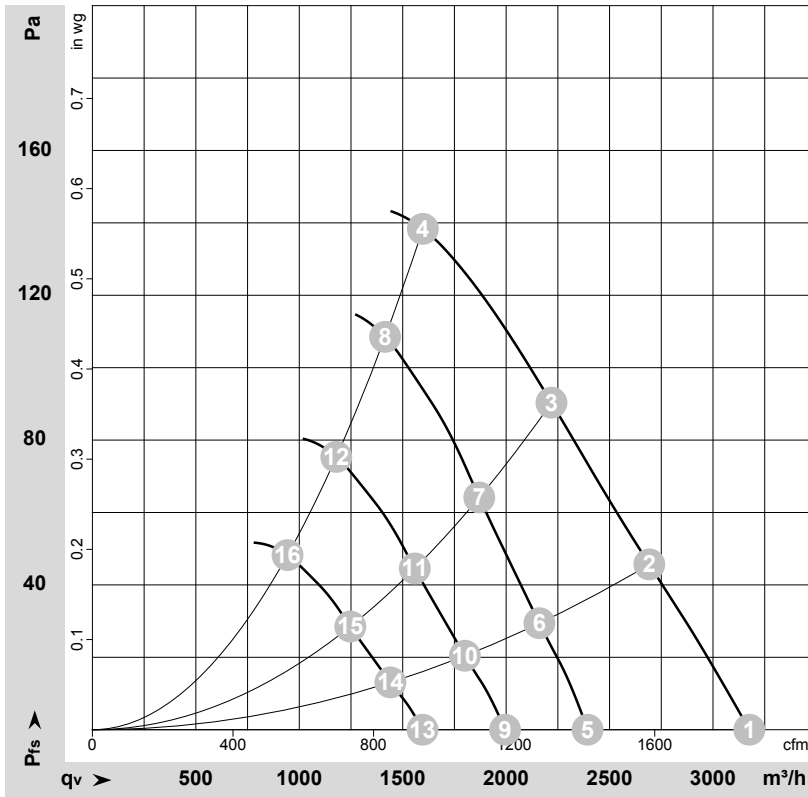

$$\rho = 1.178 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-138597-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|--------------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | inH <sub>2</sub> O |
| 1  | 230 | 50 | 2390              | 170             | 1.30 | 64                | 71                | 3175           | 0               | 1870           | 0.00               |
| 2  | 230 | 50 | 2245              | 170             | 1.35 | 64                | 71                | 2690           | 45              | 1585           | 0.18               |
| 3  | 230 | 50 | 2135              | 170             | 1.35 | 62                | 69                | 2220           | 90              | 1305           | 0.36               |
| 4  | 230 | 50 | 2020              | 170             | 1.35 | 62                | 69                | 1595           | 140             | 940            | 0.56               |
| 5  | 230 | 50 | 1800              | 72              | 0.56 | 57                | 64                | 2395           | 0               | 1410           | 0.00               |
| 6  | 230 | 50 | 1800              | 86              | 0.70 | 58                | 65                | 2160           | 29              | 1270           | 0.12               |
| 7  | 230 | 50 | 1800              | 100             | 0.80 | 58                | 64                | 1870           | 64              | 1100           | 0.26               |
| 8  | 230 | 50 | 1800              | 116             | 0.93 | 59                | 65                | 1415           | 109             | 835            | 0.44               |
| 9  | 230 | 50 | 1500              | 42              | 0.32 | 52                | 60                | 1995           | 0               | 1175           | 0.00               |
| 10 | 230 | 50 | 1500              | 50              | 0.40 | 54                | 61                | 1800           | 20              | 1060           | 0.08               |
| 11 | 230 | 50 | 1500              | 58              | 0.47 | 53                | 60                | 1560           | 44              | 915            | 0.18               |
| 12 | 230 | 50 | 1500              | 67              | 0.54 | 54                | 62                | 1180           | 76              | 695            | 0.31               |
| 13 | 230 | 50 | 1200              | 21              | 0.16 | 47                | 54                | 1595           | 0               | 940            | 0.00               |
| 14 | 230 | 50 | 1200              | 26              | 0.21 | 48                | 55                | 1440           | 13              | 850            | 0.05               |
| 15 | 230 | 50 | 1200              | 30              | 0.24 | 47                | 54                | 1245           | 28              | 735            | 0.11               |
| 16 | 230 | 50 | 1200              | 34              | 0.27 | 48                | 55                | 945            | 49              | 555            | 0.20               |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
p<sub>fs</sub> = Pressure increase

