

EC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

W3G300-HC09-12 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W3G300-HC09-12	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1350
Power consumption	W	38
Current draw	A	0.38
Max. back pressure	Pa	40
Max. back pressure	in. wg	0.16
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

Technical description

Weight	2.2 kg
Size	300 mm
Motor size	55
Rotor surface	Cast in PA plastic
Blade material	PA plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	CE




EC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

Product drawing

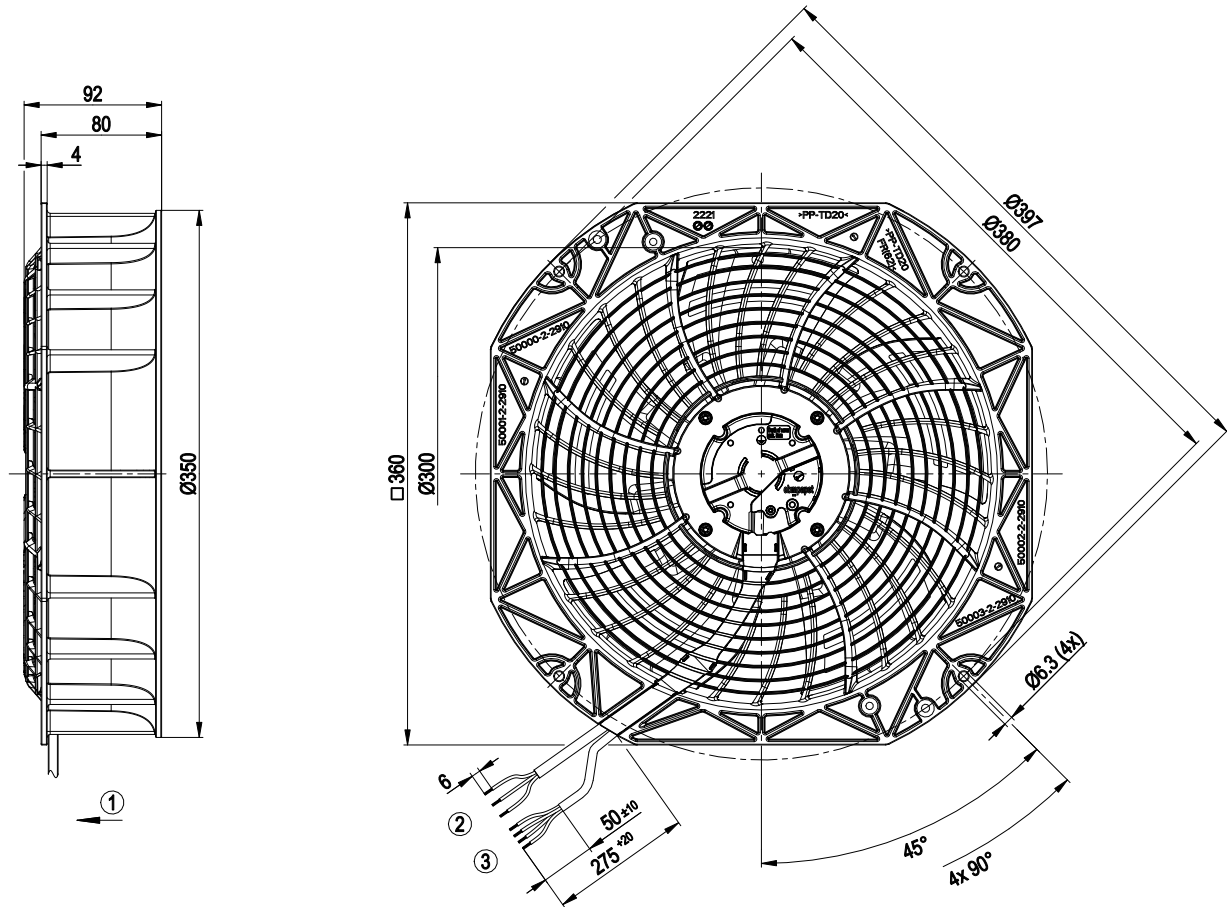

1	Airflow direction "V"
2	Cable halogen-free, 3G 0.5 mm ² , 3x crimped splices
3	Cable halogen-free, 4x 0.25 mm ² , 4x crimped splices




EC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

Connection diagram

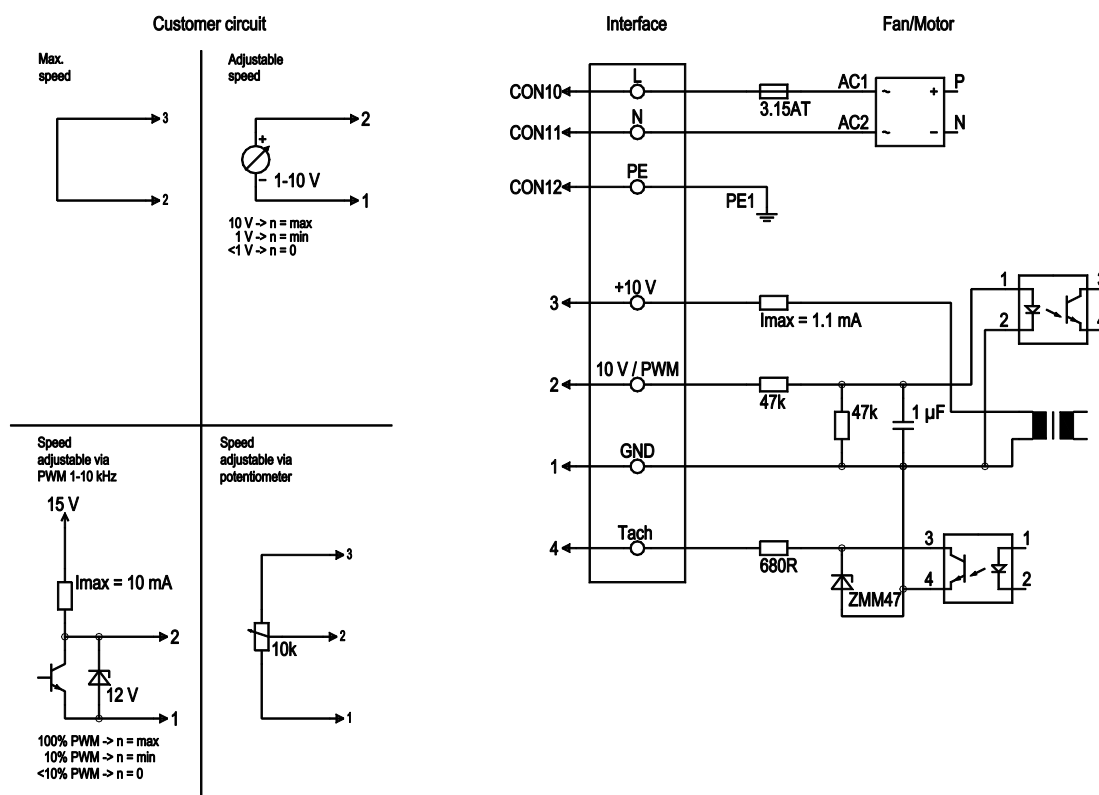

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	brown	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10 V / max. 1,1 mA	red	Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof
	4	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated




EC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

Curves: Air performance 50 Hz

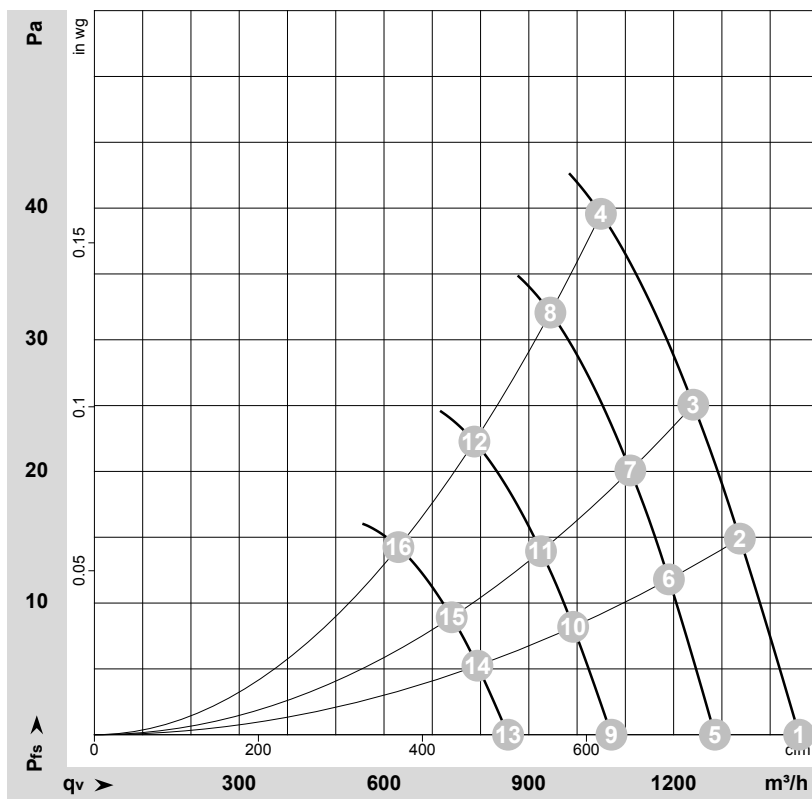

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-177129-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	1365	34	0.34	53	59	1460	0	860	0.00
2	230	50	1345	36	0.36	53	59	1335	15	785	0.06
3	230	50	1340	37	0.37	53	59	1240	25	730	0.10
4	230	50	1350	38	0.38	54	61	1050	40	615	0.16
5	230	50	1200	23	0.23	50	56	1285	0	755	0.00
6	230	50	1200	25	0.26	50	56	1190	12	700	0.05
7	230	50	1200	26	0.27	50	56	1110	20	655	0.08
8	230	50	1200	28	0.28	51	58	945	32	555	0.13
9	230	50	1000	13	0.14	45	51	1070	0	630	0.00
10	230	50	1000	15	0.15	46	52	990	9	585	0.04
11	230	50	1000	15	0.15	45	51	925	14	545	0.06
12	230	50	1000	16	0.16	47	54	785	22	465	0.09
13	230	50	800	7.0	0.07	40	46	855	0	505	0.00
14	230	50	800	8.0	0.08	40	46	795	5	465	0.02
15	230	50	800	8.0	0.08	40	46	740	9	435	0.04
16	230	50	800	8.0	0.08	41	48	630	14	370	0.06

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

