

EC axial fan

sickle-shaped blades (S series)
with round full nozzle

W3G400-CA22-71 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G400-CA22-71	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1630
Power consumption	W	410
Current draw	A	2.6
Max. back pressure	Pa	180
Max. back pressure	in. wg	0.72
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	43.4	31.2	09 Power consumption P_{ed}	kW	0.4
02 Measurement category		A		09 Air flow q_v	m³/h	3265
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	181
04 Efficiency grade N		52.2	40	10 Speed (rpm) n	min ⁻¹	1630
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$ LU-71911



Technical description


Weight	8.9 kg
Size	400 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Painted black
Blade material	Sheet steel, painted black
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Alarm relay - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; CCC; EAC; UL 1004-3 + 60730-1

EC axial fan

sickle-shaped blades (S series)

with round full nozzle

Product drawing

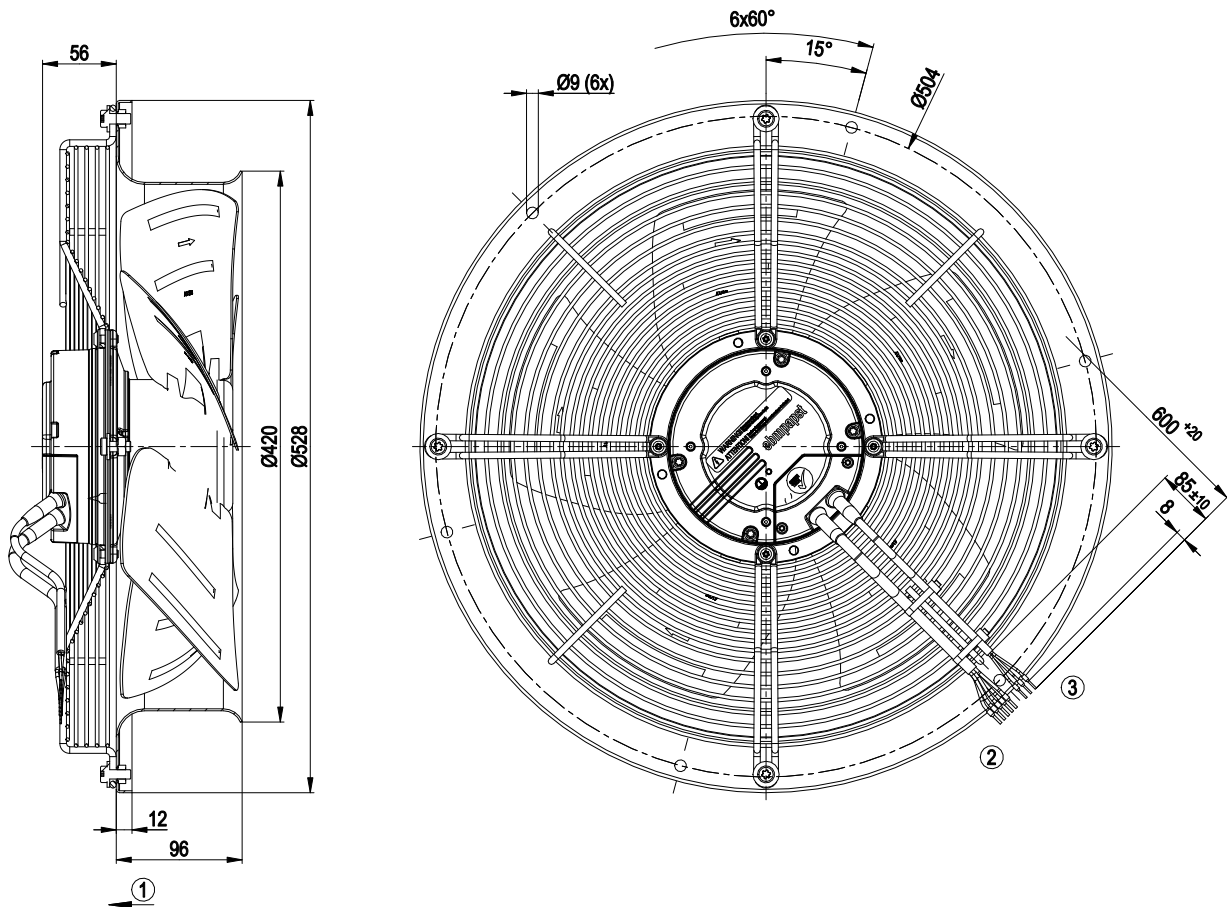


1	Direction of air flow "V"
2	Cable PVC AWG18, 5x crimped ferrules
3	Cable PVC AWG22, 3x crimped ferrules




EC axial fan

sickle-shaped blades (S series)
with round full nozzle

Connection diagram

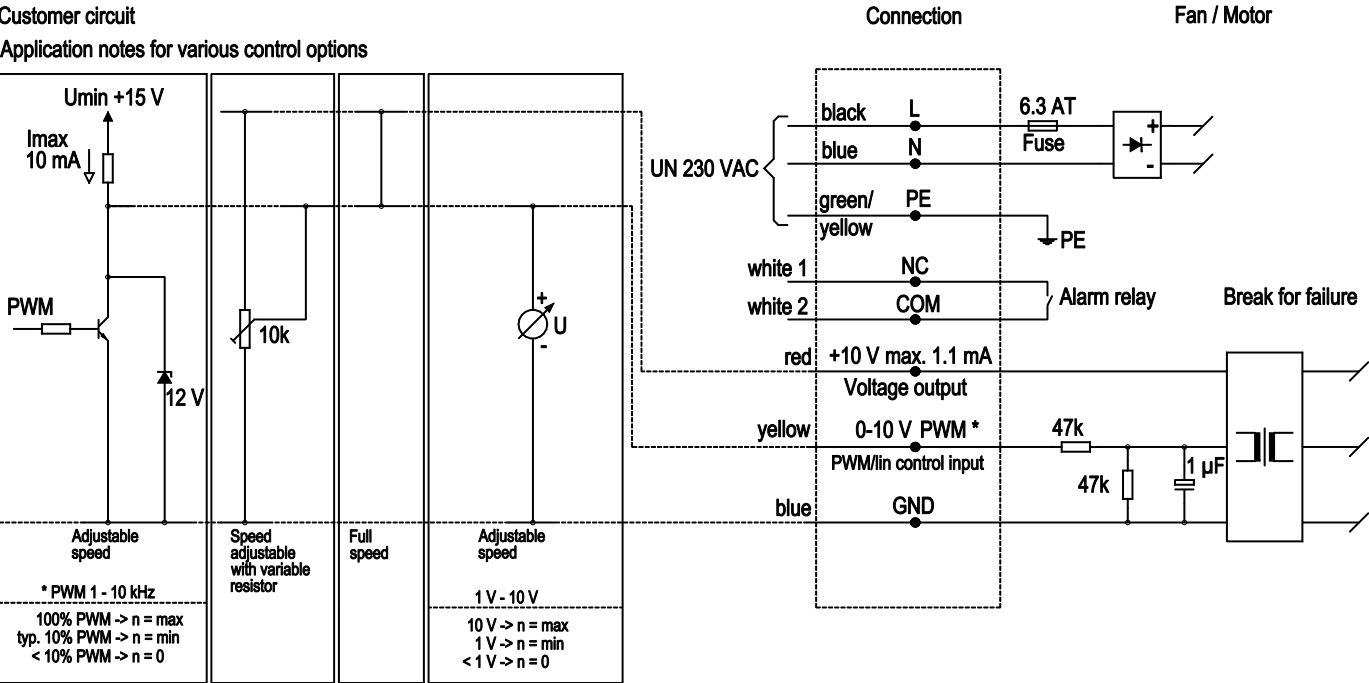

Curves: Air performance 50 Hz

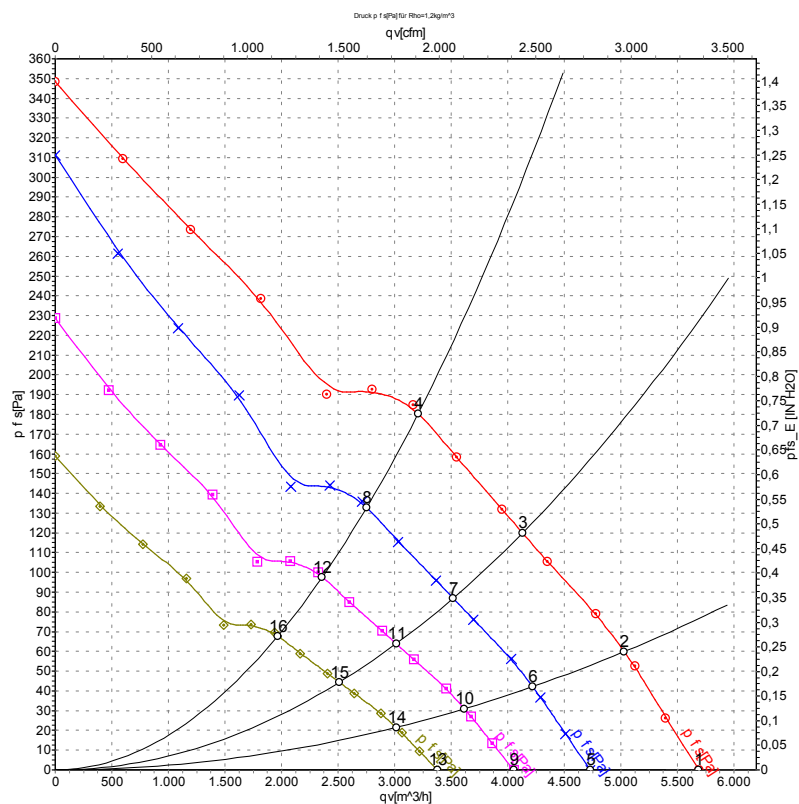

Measurement: LU-63198-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	1685	341	2.08	5690	0	3350	0.00
2	230	50	1670	369	2.24	5030	60	2960	0.24
3	230	50	1645	379	2.31	4130	120	2430	0.48
4	230	50	1630	410	2.60	3210	180	1890	0.72
5	230	50	1400	196	1.20	4730	0	2785	0.00
6	230	50	1400	218	1.32	4220	42	2485	0.17
7	230	50	1400	234	1.43	3520	87	2070	0.35
8	230	50	1400	246	1.49	2755	134	1620	0.54
9	230	50	1200	123	0.75	4055	0	2385	0.00
10	230	50	1200	137	0.83	3620	31	2130	0.12
11	230	50	1200	148	0.90	3015	64	1775	0.26
12	230	50	1200	155	0.94	2360	98	1390	0.39
13	230	50	1000	71	0.44	3380	0	1990	0.00
14	230	50	1000	79	0.48	3015	22	1775	0.09
15	230	50	1000	85	0.52	2515	44	1480	0.18
16	230	50	1000	90	0.54	1965	68	1160	0.27

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

