

EC axial fan - AxiCool

sickled blades (S series)
Wall ring with air-guiding system

W3G450-SC28-35 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G450-SC28-35	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1300
Power input	W	345
Current draw	A	2.2
Max. back pressure	Pa	125
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	42.6	30.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		51.9	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.34
09 Air flow q_v	m³/h	4005
09 Pressure increase p_{fs}	Pa	118
10 Speed (rpm) n	min ⁻¹	1305
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-124620




Technical features

Mass	12.1 kg
Size	450 mm
Surface of rotor	Coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Technical features	- Output 10 VDC, max. 1.1 mA - Motor current limit - PFC, passive - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE

EC axial fan - AxiCool

sickled blades (S series)
Wall ring with air-guiding system

Product drawing

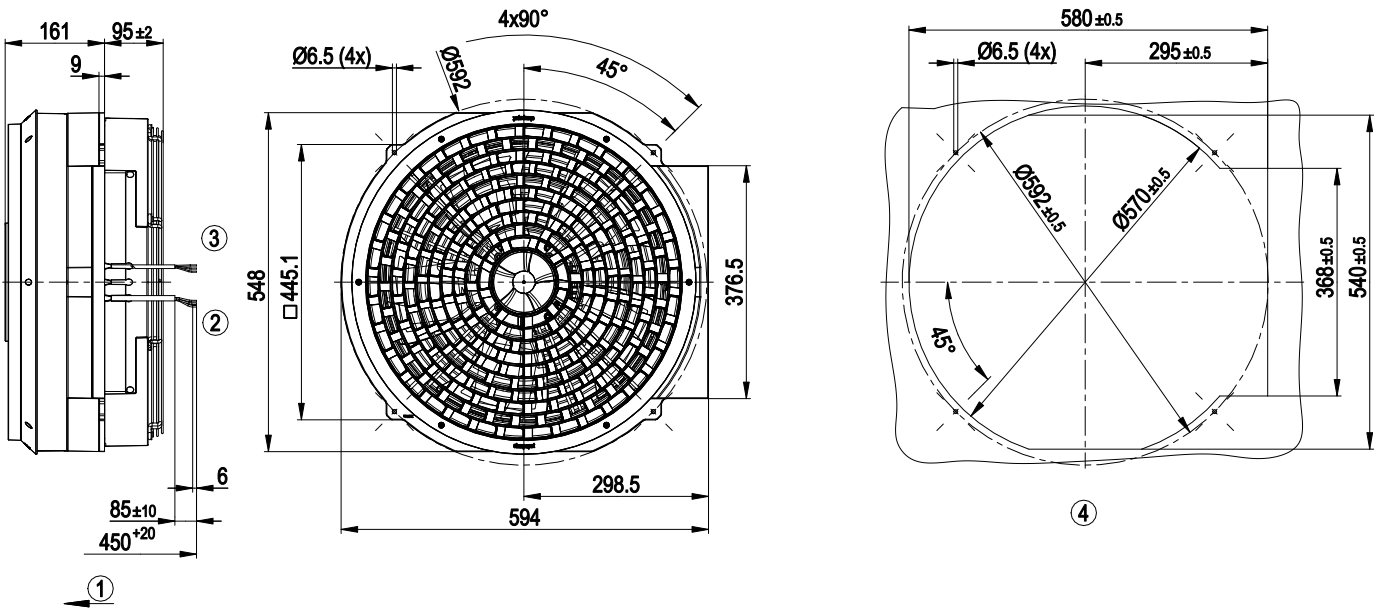


1	Direction of air flow "V"
2	Connection line PVC AWG18, 3x lead tips crimped
3	Control line PVC AWG22, 3x lead tips crimped
4	Mounting dimensions




EC axial fan - AxiCool

sickled blades (S series)
Wall ring with air-guiding system

Connection screen

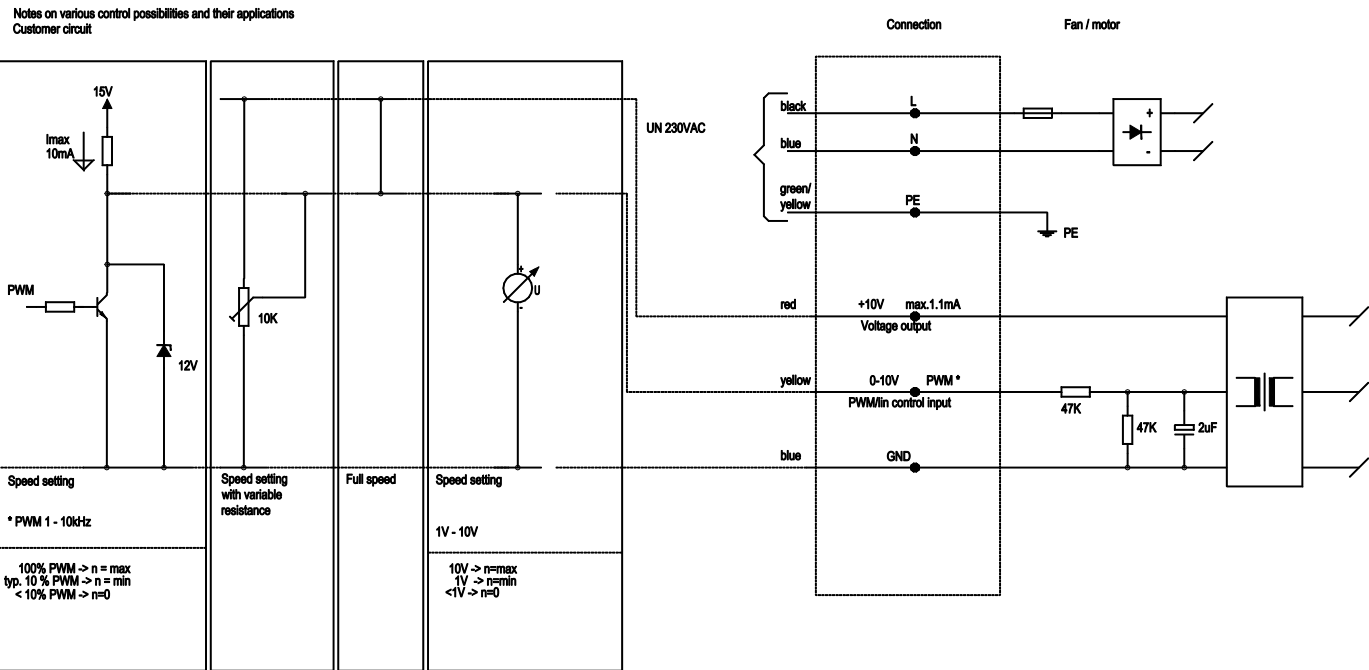

Charts: Air flow 50 Hz

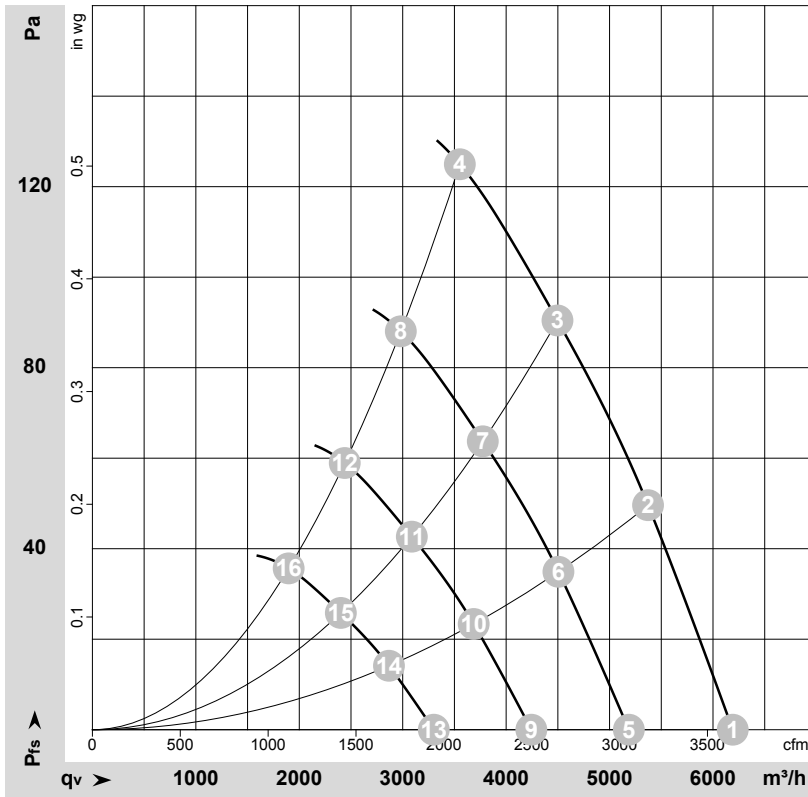

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-146536-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	230	50	1300	265	1.77	64	70	71	6190	0	3645	0.00
2	230	50	1300	301	2.00	62	68	69	5370	50	3160	0.20
3	230	50	1300	325	2.15	61	67	69	4495	90	2645	0.36
4	230	50	1300	345	2.20	64	70	71	3550	125	2090	0.50
5	230	50	1100	156	1.04	60	66	67	5185	0	3055	0.00
6	230	50	1100	178	1.18	57	63	65	4505	35	2650	0.14
7	230	50	1100	192	1.27	57	63	64	3775	64	2220	0.26
8	230	50	1100	205	1.35	59	66	66	2980	88	1755	0.35
9	230	50	900	85	0.57	55	61	62	4245	0	2500	0.00
10	230	50	900	97	0.64	52	58	60	3685	23	2170	0.09
11	230	50	900	105	0.70	52	58	59	3090	43	1820	0.17
12	230	50	900	112	0.74	54	61	61	2440	59	1435	0.24
13	230	50	700	40	0.27	49	54	56	3300	0	1945	0.00
14	230	50	700	46	0.30	46	52	53	2865	14	1685	0.06
15	230	50	700	50	0.33	45	51	53	2400	26	1415	0.10
16	230	50	700	53	0.35	48	55	55	1900	36	1115	0.14

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_v = Air flow · p_{fs} = Pressure increase

