

Fan housing with guard grille

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

|       |                |  |
|-------|----------------|--|
| Type  | W3G450-ZR75-01 |  |
| Motor | M3G112-EA      |  |

|                       |     |            |
|-----------------------|-----|------------|
| Phase                 |     | 3~         |
| Nominal voltage       | VAC | 400        |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency             | Hz  | 50/60      |

|                          |                   |      |
|--------------------------|-------------------|------|
| Method of obtaining data |                   | ml   |
| Speed (rpm)              | min <sup>-1</sup> | 1910 |
| Power consumption        | W                 | 1050 |
| Current draw             | A                 | 1.6  |
| Max. back pressure       | Pa                | 390  |
| Max. back pressure       | in. wg            | 1.57 |
| Min. ambient temperature | °C                | -40  |
| Max. ambient temperature | °C                | 60   |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

**Data according to Commission Regulation (EU) 327/2011 (prEN 17166)**

|                                   |   | Actual | Req. 2015 |                               |                   |      |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 54.8   | 33.7      | 09 Power consumption $P_{ed}$ | kW                | 1.01 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 5590 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 329  |
| 04 Efficiency grade N             |   | 61.1   | 40        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1910 |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.00 |

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-211107

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 11.18 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Size                                                                       | 450 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Motor size                                                                 | 112                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Terminal box material                                                      | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Electronics housing material                                               | Die-cast aluminum, painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Fan housing material                                                       | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Moisture (F) / Environmental (H) protection class                          | H2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- External 24 V input (parameter setting)</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- MODBUS V5.1</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- EEPROM write cycles: 100,000 maximum</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motor protection                                                           | Thermal switch auto reset, internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Protection class assignment                                                | <p>I; If a protective earth is connected.</p> <p>The built-in component has several local protection class assignments.</p> <p>The final protection class is determined by the intended installation.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |


W3G450-ZR75-01

## EC axial panel fan - AxiEco

Fan housing with guard grille

|                           |                                                               |
|---------------------------|---------------------------------------------------------------|
| Conformity with standards | EN 61800-5-1; CE                                              |
| Approval                  | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1 |

## Product drawing

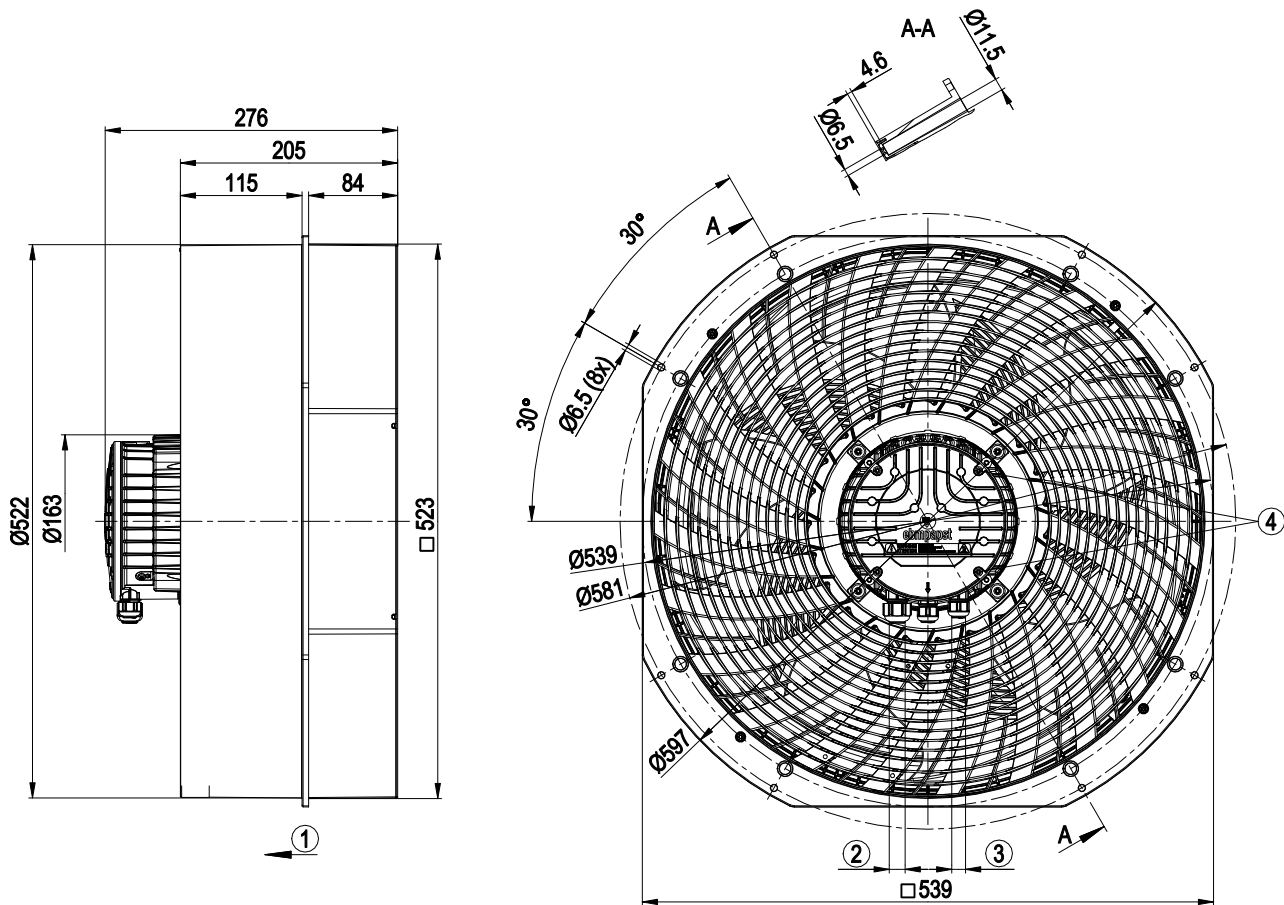


Accessory part: Guard grill 45050-2-4039 with oval head screw 60080-7-6201 (4x), can be fitted on the intake side.  
Not included in scope of delivery.

The installation of accessories may change the air performance and noise values.


- |   |                                                                                                                                                                              |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Airflow direction "V"                                                                                                                                                        |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 10 mm, tightening torque 1.8±0.3 Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 7 mm, tightening torque 1.8±0.3 Nm  |
| 4 | Tightening torque 1.5 ± 0.2 Nm                                                                                                                                               |

## Accessory part

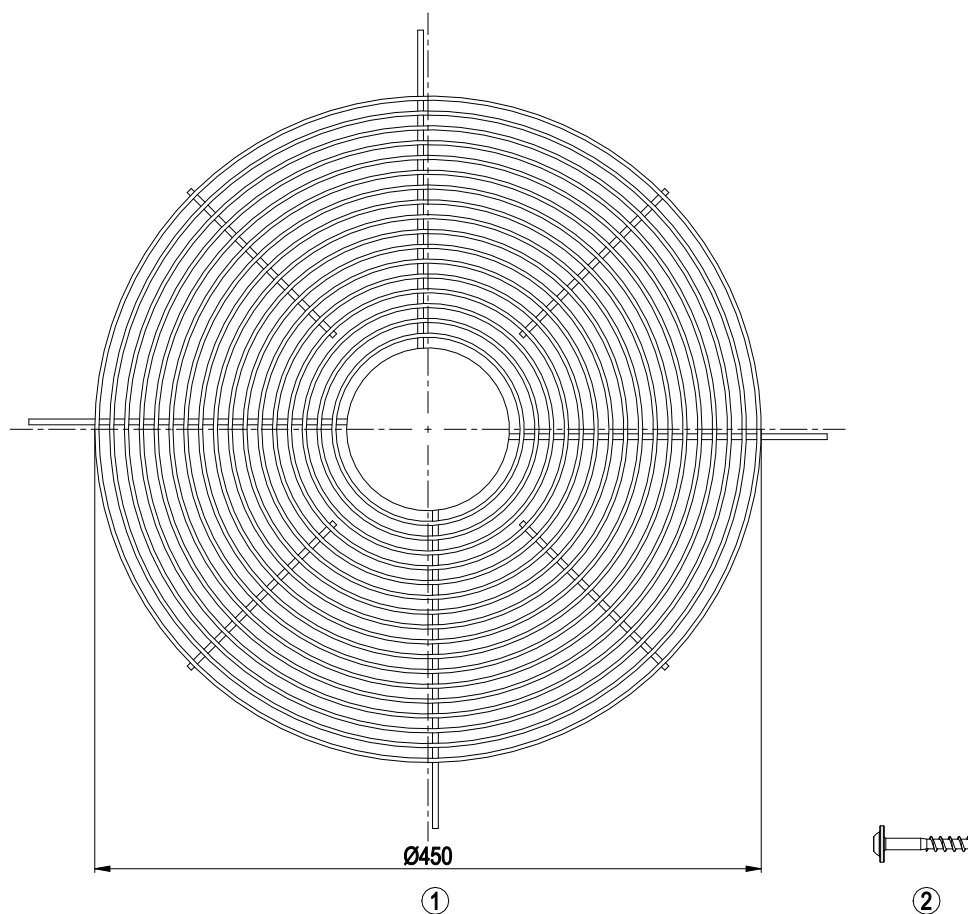

|   |                                   |
|---|-----------------------------------|
| 1 | Guard grill 45050-2-4039          |
| 2 | Oval head screw 60080-7-6201 (4x) |

## Mounting dimensions

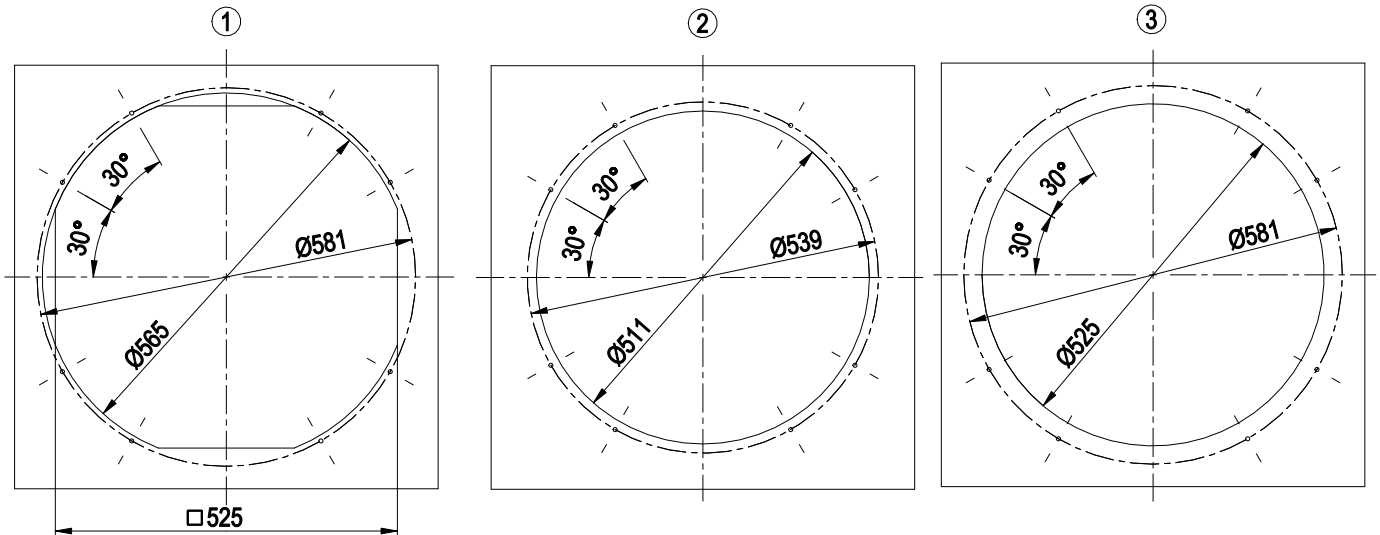

All 8 holes on the relevant pitch circle must always be used for all types of fastening.

1 intake-side mounting on flange


2 intake-side mounting on suction nozzle

The Ø6.5 mm holes must be pierced from the underside with a mandrel or similar tool.

We recommend using M6 cheese-head screws with hexagon socket (DIN 912/DIN EN ISO 4762) for fastening.


3 outlet-side mounting on flange

## Connection diagram

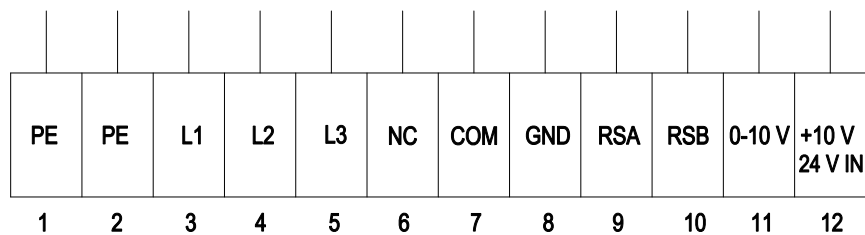

| No. | Conn.  | Designation | Function/assignment                                                                                                                                                                                                      |
|-----|--------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | PE     | PE          | Protective earth                                                                                                                                                                                                         |
| 2   | PE     | PE          | Protective earth                                                                                                                                                                                                         |
| 3   | L1     | L1          | Power supply                                                                                                                                                                                                             |
| 4   | L2     | L2          | Power supply                                                                                                                                                                                                             |
| 5   | L3     | L3          | Power supply                                                                                                                                                                                                             |
| 6   | NC     | NC          | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 7   | COM    | COM         | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 8   | GND    | GND         | Reference ground for control interface, SELV                                                                                                                                                                             |
| 9   | RSA    | RSA         | RS485 interface for MODBUS, RSA; SELV                                                                                                                                                                                    |
| 10  | RSB    | RSB         | RS485 interface for MODBUS, RSB; SELV                                                                                                                                                                                    |
| 11  | 0-10 V | 0-10 V      | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve                                                                                                                                                     |
| 12  | +10 V  | +10 V       | Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot);<br>fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply |

## Curves: Air performance 50 Hz

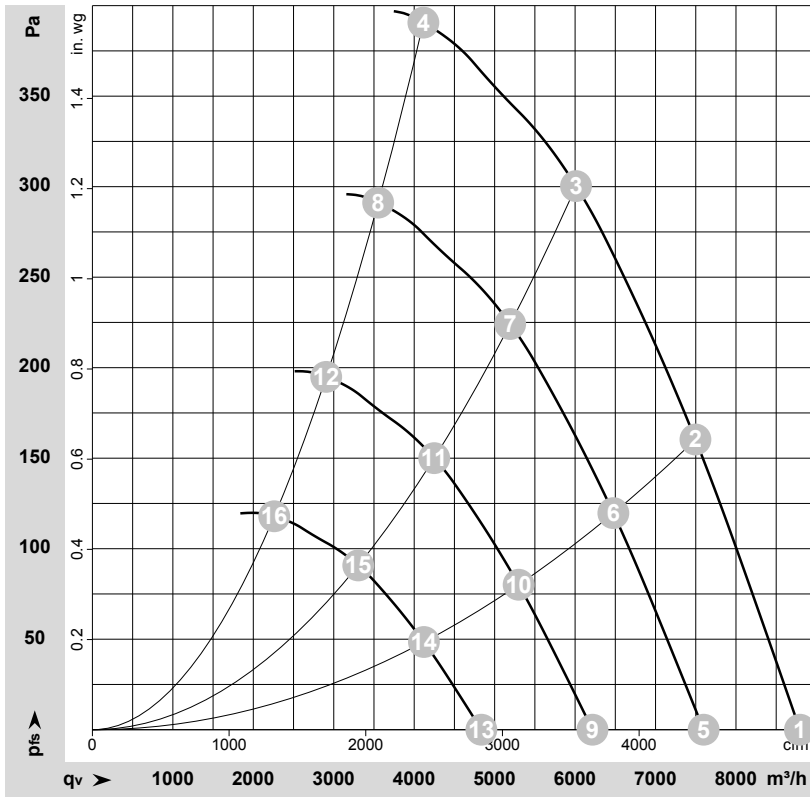

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-211107-1  
Date: 2021-01-18  
Nozzle: 45000-2-2943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 3~    | 400 | 50 | 1910              | 812             | 1.27 | 76                | 82                | 85                 | 8795              | 0               | 5175           | 0.00            |
| 2  | 3~    | 400 | 50 | 1910              | 930             | 1.44 | 74                | 80                | 83                 | 7495              | 160             | 4410           | 0.64            |
| 3  | 3~    | 400 | 50 | 1910              | 996             | 1.54 | 74                | 80                | 83                 | 6010              | 300             | 3540           | 1.20            |
| 4  | 3~    | 400 | 50 | 1910              | 1050            | 1.60 | 77                | 84                | 87                 | 4115              | 390             | 2420           | 1.57            |
| 5  | 3~    | 400 | 50 | 1650              | 524             | 0.82 | 72                | 78                | 81                 | 7600              | 0               | 4470           | 0.00            |
| 6  | 3~    | 400 | 50 | 1650              | 599             | 0.93 | 70                | 77                | 79                 | 6475              | 120             | 3810           | 0.48            |
| 7  | 3~    | 400 | 50 | 1650              | 642             | 0.99 | 70                | 77                | 79                 | 5195              | 224             | 3055           | 0.90            |
| 8  | 3~    | 400 | 50 | 1650              | 665             | 1.03 | 73                | 81                | 83                 | 3550              | 291             | 2090           | 1.17            |
| 9  | 3~    | 400 | 50 | 1350              | 287             | 0.45 | 67                | 73                | 76                 | 6215              | 0               | 3660           | 0.00            |
| 10 | 3~    | 400 | 50 | 1350              | 328             | 0.51 | 65                | 72                | 74                 | 5300              | 80              | 3120           | 0.32            |
| 11 | 3~    | 400 | 50 | 1350              | 352             | 0.54 | 65                | 72                | 74                 | 4250              | 150             | 2500           | 0.60            |
| 12 | 3~    | 400 | 50 | 1350              | 364             | 0.56 | 68                | 76                | 78                 | 2905              | 195             | 1710           | 0.78            |
| 13 | 3~    | 400 | 50 | 1050              | 135             | 0.21 | 61                | 67                | 70                 | 4835              | 0               | 2845           | 0.00            |
| 14 | 3~    | 400 | 50 | 1050              | 154             | 0.24 | 59                | 65                | 68                 | 4120              | 49              | 2425           | 0.20            |
| 15 | 3~    | 400 | 50 | 1050              | 165             | 0.26 | 59                | 65                | 68                 | 3305              | 91              | 1945           | 0.37            |
| 16 | 3~    | 400 | 50 | 1050              | 171             | 0.26 | 62                | 69                | 72                 | 2260              | 118             | 1330           | 0.47            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase