

EC axial fan - HyBlade

sickle-shaped blades (S series)
with round full nozzle, for rail applications

W3G500-CA74-N1 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G500-CA74-N1	
Motor	M3G112-EA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1600
Power consumption	W	1000
Current draw	A	1.6
Max. back pressure	Pa	235
Max. back pressure	in. wg	0.94
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan - HyBlade

sickle-shaped blades (S series)
with round full nozzle, for rail applications

Technical description

Weight	15.7 kg
Size	500 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted black
Impeller material	PA plastic, sheet-metal plate painted black
Support ring material	Stainless steel
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H3
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Output 10 VDC, max. 10 mA - Alarm relay - Integrated PID controller - Run monitoring - Power limiter - Motor current limitation - Emergency operation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC regulations	According to EN 50121-3-2
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 15085-1, CPC3; EN 45545-2, HL3; EN 50155; EN 61373, Cat. 1B
Approval	EAC



EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Comment

A prerequisite for operation is a Class 1 vehicle electrical system architecture according to EN 50533; if supply potential (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation and they then have only basic insulation

The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.




EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Product drawing

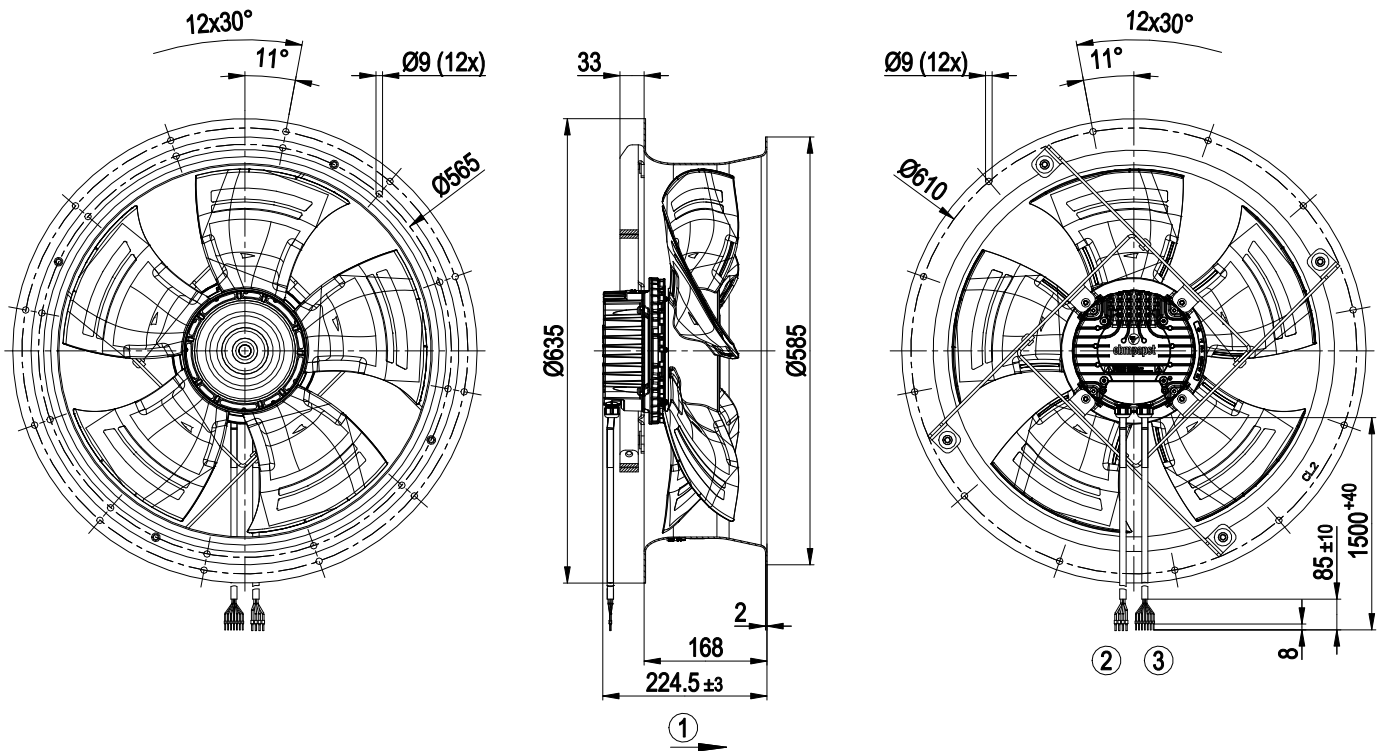

1	Direction of air flow "A"
2	Cable, halogen-free, railway application EN 45545, 4G 1.5 mm ² 4x wire-end ferrule
3	Cable, halogen-free, railway application EN 45545, 7X 0.5 mm ² 7x wire-end ferrule




EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Connection diagram

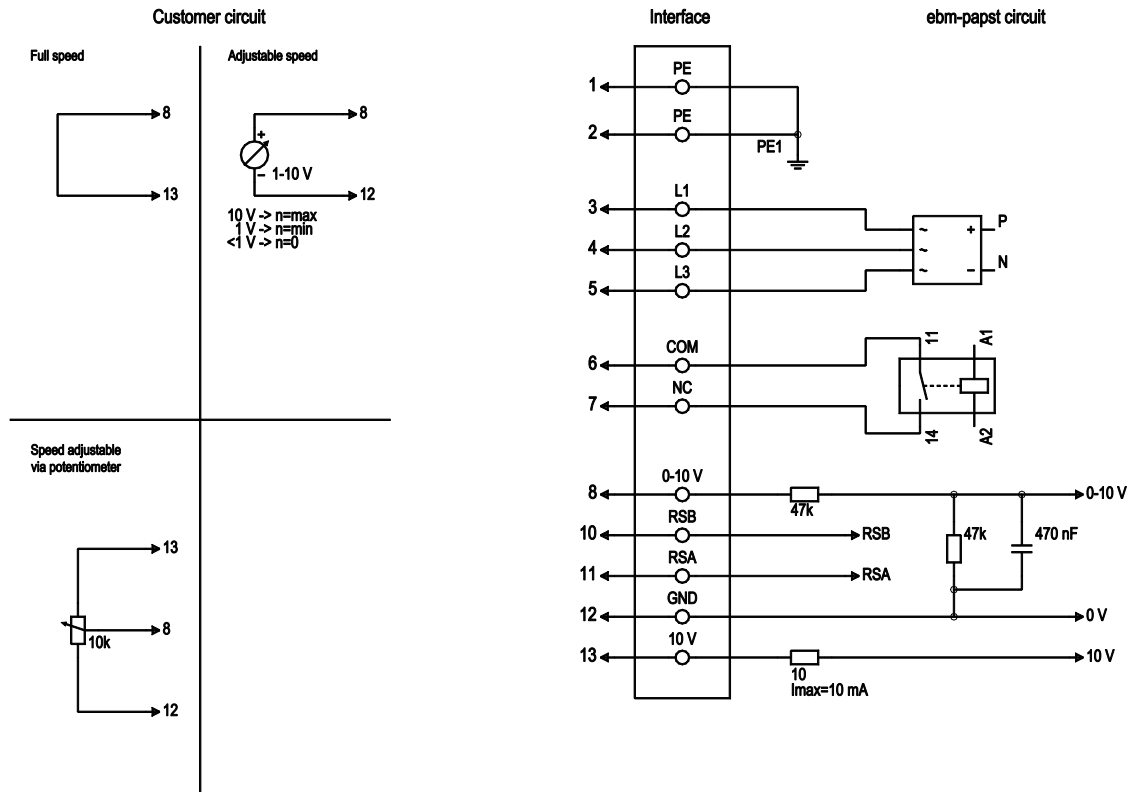

No.	Conn.	Designation	Color	Function/assignment
1	1	PE	green/yellow	Protective earth
1	2	PE	-	not brought out via wire
1	3	L1	black	Power supply, phase 50/60 Hz
1	4	L2	blue	Power supply, phase 50/60 Hz
1	5	L3	brown	Power supply, phase 50/60 Hz
2	6	COM	gray	Status relay, floating status contact, common connection, contact rating 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation on control interface side, basic insulation on supply side according to EN 50124-1
2	7	NC	orange	Status relay, floating status contact, break for failure, contact rating 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation on control interface side, basic insulation on supply side according to EN 50124-1
2	8	0-10V	yellow	Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve
2	10	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V ± 3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV




EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Curves: Air performance 50 Hz

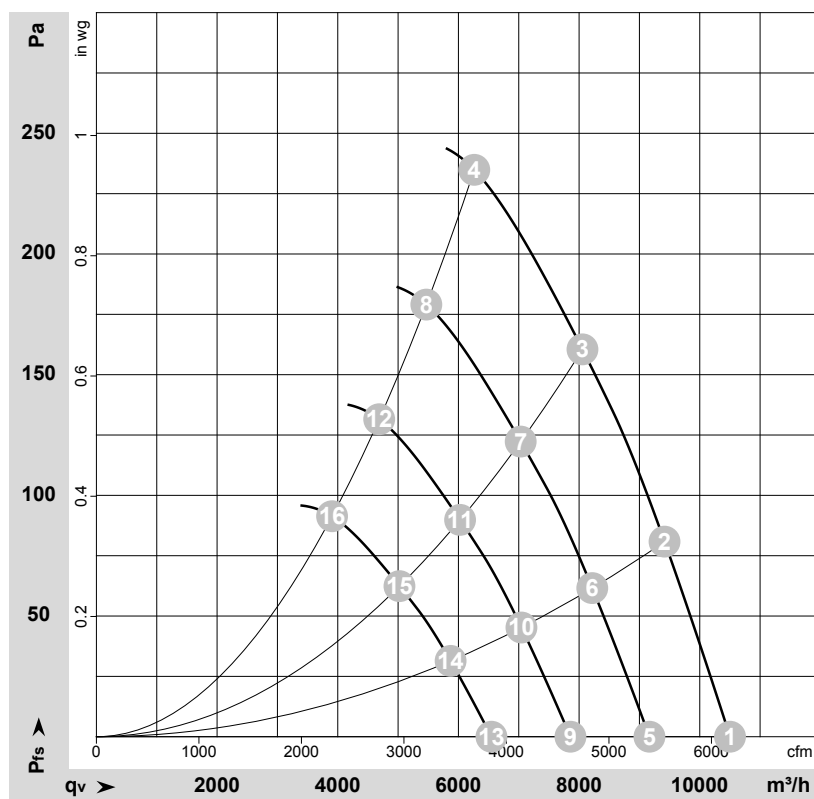

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-182232-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	1600	718	1.12	74	82	82	10500	0	6180	0.00
2	400	50	1600	847	1.31	71	79	79	9415	80	5540	0.32
3	400	50	1600	942	1.45	71	79	79	8055	160	4740	0.64
4	400	50	1600	1000	1.60	73	81	81	6265	235	3685	0.94
5	400	50	1400	478	0.74	71	78	79	9165	0	5395	0.00
6	400	50	1400	563	0.87	68	75	76	8220	64	4840	0.26
7	400	50	1400	626	0.96	68	76	76	7030	123	4140	0.49
8	400	50	1400	664	1.02	70	78	78	5470	179	3220	0.72
9	400	50	1200	301	0.47	67	74	75	7855	0	4625	0.00
10	400	50	1200	355	0.55	64	71	72	7045	47	4145	0.19
11	400	50	1200	394	0.61	64	72	72	6025	90	3545	0.36
12	400	50	1200	418	0.64	66	74	74	4685	132	2760	0.53
13	400	50	1000	174	0.27	62	70	70	6545	0	3855	0.00
14	400	50	1000	205	0.32	59	67	67	5870	33	3455	0.13
15	400	50	1000	228	0.35	59	67	67	5025	63	2955	0.25
16	400	50	1000	242	0.37	61	69	69	3905	91	2300	0.37

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

