

EC axial fan - HyBlade

sickled blades (S series)
with full square nozzle

W3G710-GB77-47 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G710-GB77-47	
Motor	M3G112-EA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	620
Power input	W	250
Current draw	A	1.1
Max. back pressure	Pa	60
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	46.4	29.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		56.8	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.23
09 Air flow q_v	m³/h	6515
09 Pressure increase p_{fs}	Pa	54
10 Speed (rpm) n	min ⁻¹	620
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-161725



EC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	25.6 kg
Size	710 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-5°
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; EN 60335-1; CE
Approval	UL 1004-7 + 60730; C22.2 Nr.77 + CAN/CSA-E60730-1; EAC




EC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Product drawing

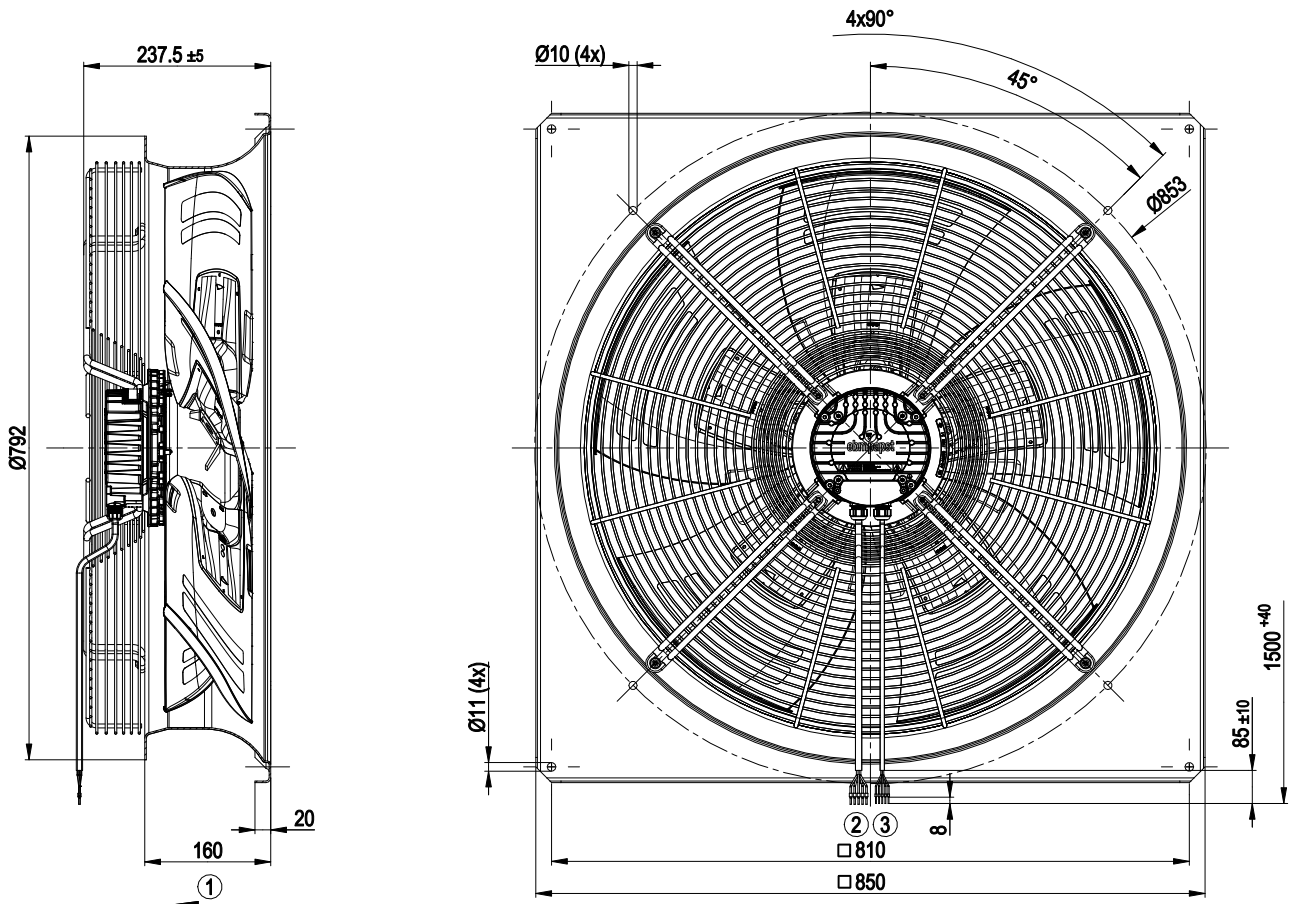


1	Direction of air flow "V"
2	Connection line PVC AWG18, 5x crimped core-end sleeves
3	Connection line PVC AWG22, 5x crimped core-end sleeves

EC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Connection screen

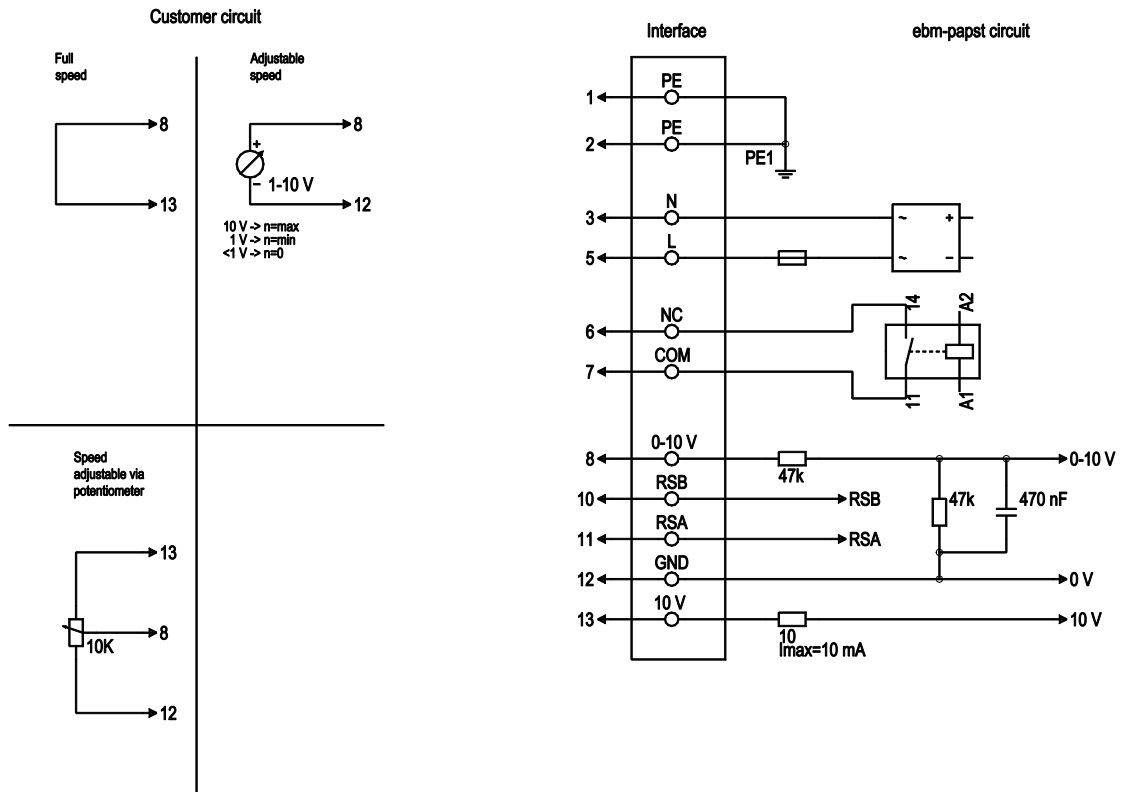

No.	Conn.	Designation	Colour	Function / assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	N	blue	Supply voltage, neutral conductor, 50/60 Hz
1	5	L	black	Supply voltage, phase, 50/60 Hz
1	6	NC	white 1	Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
1	7	COM	white 2	Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
2	8	0-10V	yellow	Analogue input 1 (set value); 0-10 V; R _i =100kΩ; parametrisable curve
2	10	RSB	brown	RS485 interface for Modbus, RSB
2	11	RSA	white	RS485 interface for Modbus, RSA
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC; +10 V +/-3%; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. potentiometer)




EC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Charts: Air flow 50 Hz

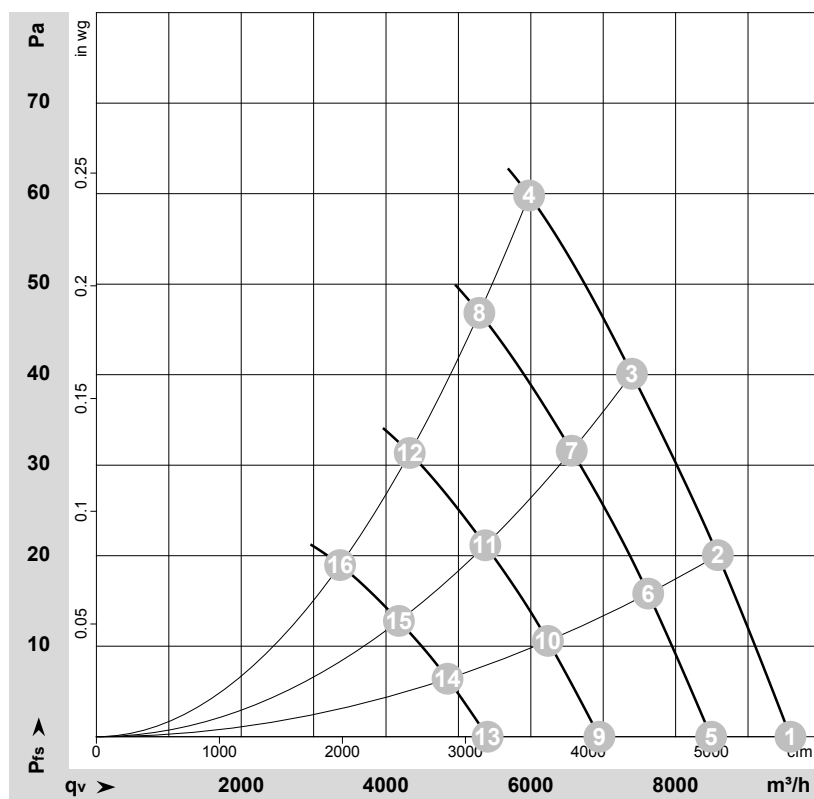

$$\rho = 1.175 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-161725-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	230	50	620	141	0.65	57	63	62	9585	0	5640	0.00
2	230	50	620	177	0.80	54	60	59	8585	20	5050	0.08
3	230	50	620	213	0.95	55	61	60	7395	40	4355	0.16
4	230	50	620	250	1.10	58	65	64	5975	60	3520	0.24
5	230	50	550	98	0.45	54	60	59	8490	0	4995	0.00
6	230	50	550	124	0.56	51	57	56	7620	16	4485	0.06
7	230	50	550	149	0.66	52	58	57	6565	32	3865	0.13
8	230	50	550	172	0.76	55	62	61	5290	47	3115	0.19
9	230	50	450	53	0.25	49	55	54	6945	0	4090	0.00
10	230	50	450	68	0.31	46	52	51	6235	11	3670	0.04
11	230	50	450	82	0.36	47	53	52	5370	21	3160	0.08
12	230	50	450	94	0.42	50	57	56	4325	31	2545	0.12
13	230	50	350	25	0.12	42	49	48	5405	0	3180	0.00
14	230	50	350	32	0.14	39	46	45	4850	6	2855	0.02
15	230	50	350	38	0.17	40	47	46	4180	13	2460	0.05
16	230	50	350	44	0.20	43	50	50	3365	19	1980	0.08

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_v = Air flow · P_{fs} = Pressure increase

