

W3G710-NP19-M1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | W3G710-NP19-M1    |            |
| Motor                    | M3G084-GF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 720        |
| Power consumption        | W                 | 370        |
| Current draw             | A                 | 0.65       |
| Max. back pressure       | Pa                | 100        |
| Max. back pressure       | in. wg            | 0.4        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

|                                   |   | Actual | Req. 2015 |                               |                   |      |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 47.9   | 30.6      | 09 Power consumption $P_{ed}$ | kW                | 0.32 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 7300 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 69   |
| 04 Efficiency grade N             |   | 57.3   | 40        | 10 Speed (rpm) n              | min <sup>-1</sup> | 725  |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.00 |

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-205408

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



## Technical description

|  |  |
|--|--|
| Size   | 710 mm   |
| Motor size   | 84   |
| Rotor surface  | Painted black  |
| Terminal box material  | PP plastic   |
| Electronics housing material   | Die-cast aluminum, painted black   |
| Impeller material  | PP plastic   |
| Fan housing material   | Sheet steel, galvanized and coated with black plastic (RAL 9005)   |
| Guard grille material  | Steel, coated with black plastic (RAL 9005)  |
| Number of blades   | 5  |
| Blade pitch  | 0°   |
| Airflow direction  | V  |
| Direction of rotation  | Clockwise, viewed toward rotor   |
| Degree of protection   | IP55   |
| Insulation class   | "F"  |
| Moisture (F) / Environmental (H) protection class                          | H2   |
| Ambient temperature note   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.   |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C   |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C   |
| Installation position  | Shaft horizontal or rotor on bottom; rotor on top on request   |
| Condensation drainage holes  | On rotor side  |
| Mode   | S1   |
| Motor bearing  | Ball bearing   |
| Technical features   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- External 24 V input (parameter setting)</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- EEPROM write cycles: 100,000 maximum</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference   | According to EN 61000-6-2 (industrial environment)   |
| EMC circuit feedback   | According to EN 61000-3-2/3  |
| EMC interference emission  | According to EN 61000-6-3 (household environment)  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA  |
| Electrical hookup  | Terminal box   |
| Motor protection   | Thermal switch auto reset, internally connected  |

W3G710-NP19-M1

## EC axial fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guard grille

|                                  |   |
|----------------------------------|---|
| <b>Protection class</b>          | I (with customer connection of protective earth)              |
| <b>Conformity with standards</b> | EN 61800-5-1; CE  |
| <b>Approval</b>                  | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1 |




# EC axial fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guard grille


## Product drawing

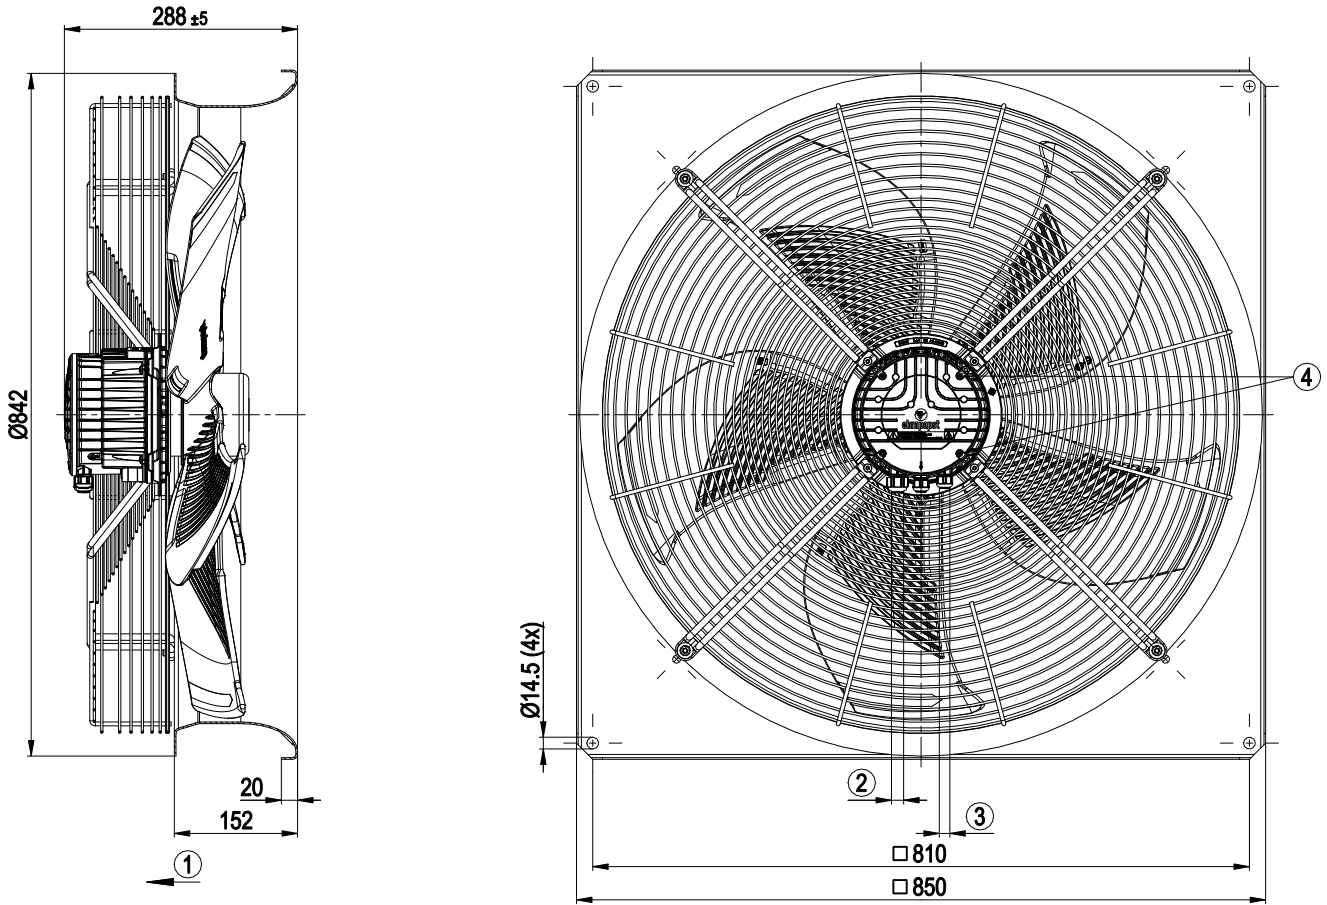

|   |  |
|---|--|
| 1 | Airflow direction "V"  |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 10 mm, tightening torque 1.8±0.3 Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque 1.8±0.3 Nm (use must be made of seal provided)<br>Cable diameter min. 4 mm, max. 7 mm, tightening torque 1.8±0.3 Nm  |
| 4 | Tightening torque 1.5 ± 0.2 Nm   |



## Mounting dimensions

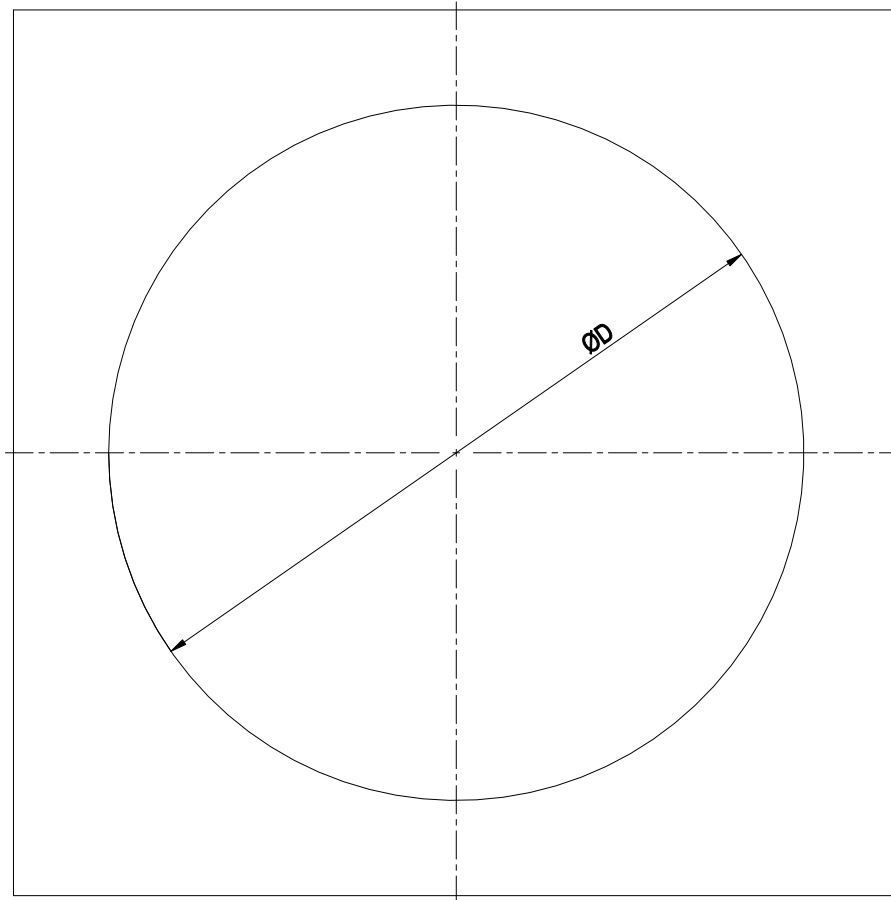

Diameter of the necessary recess for mounting the fan housing in the end device

BG630: D = Ø785 mm

BG710: D = Ø830 mm

BG800: D = Ø950 mm


BG910: D = Ø1050 mm

# EC axial fan - AxiBlade

sickle-shaped blades (S series)

Fan housing with guard grille


## Connection diagram

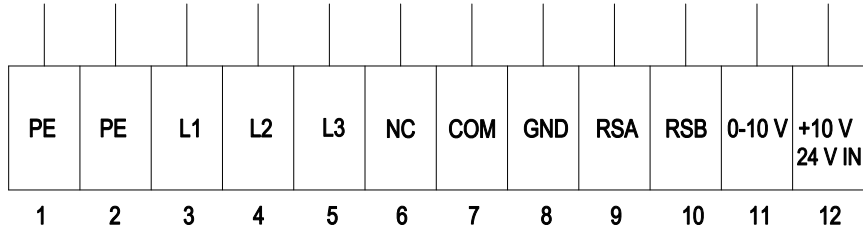

| No. | Conn.  | Designation | Function/assignment  |
|-----|--------|-------------|--|
| 1   | PE     | PE          | Protective earth   |
| 2   | PE     | PE          | Protective earth   |
| 3   | L1     | L1          | Power supply   |
| 4   | L2     | L2          | Power supply   |
| 5   | L3     | L3          | Power supply   |
| 6   | NC     | NC          | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 7   | COM    | COM         | Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side                           |
| 8   | GND    | GND         | Reference ground for control interface, SELV   |
| 9   | RSA    | RSA         | RS485 interface for MODBUS, RSA; SELV  |
| 10  | RSB    | RSB         | RS485 interface for MODBUS, RSB; SELV  |
| 11  | 0-10 V | 0-10 V      | Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve   |
| 12  | +10 V  | +10 V       | Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot);<br>fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply |



## Curves: Air performance 50 Hz

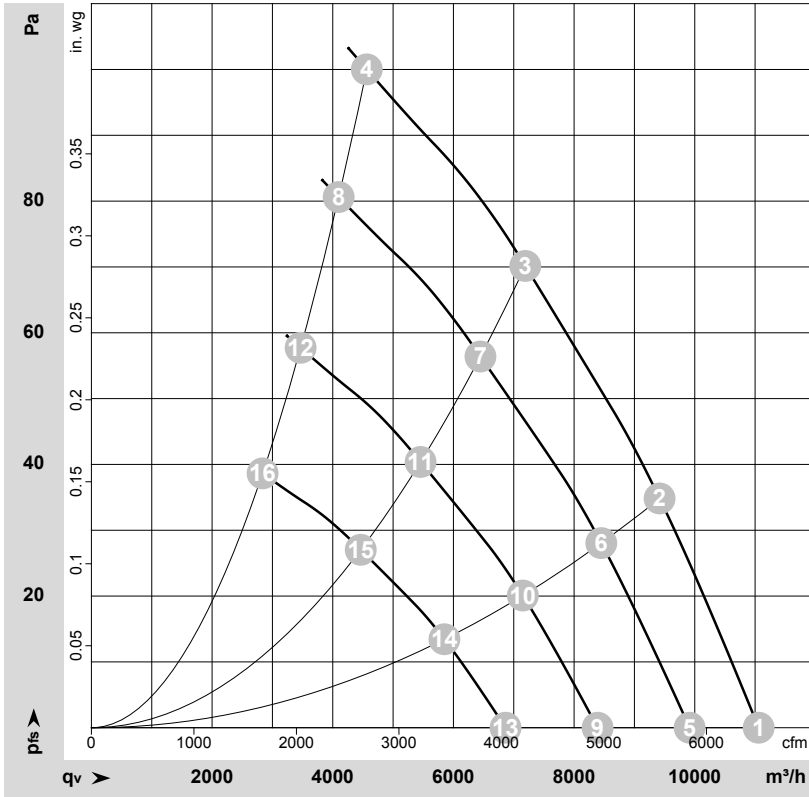

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-205408-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 3~    | 400 | 50 | 720               | 195             | 0.39 | 61                | 67                | 67                 | 11060             | 0               | 6510           | 0.00            |
| 2  | 3~    | 400 | 50 | 720               | 264             | 0.48 | 59                | 65                | 65                 | 9415              | 35              | 5545           | 0.14            |
| 3  | 3~    | 400 | 50 | 720               | 328             | 0.56 | 60                | 67                | 67                 | 7190              | 70              | 4230           | 0.28            |
| 4  | 3~    | 400 | 50 | 720               | 370             | 0.65 | 68                | 75                | 75                 | 4565              | 100             | 2685           | 0.40            |
| 5  | 3~    | 400 | 50 | 650               | 141             | 0.28 | 58                | 64                | 64                 | 9915              | 0               | 5835           | 0.00            |
| 6  | 3~    | 400 | 50 | 650               | 191             | 0.34 | 56                | 62                | 62                 | 8450              | 28              | 4975           | 0.11            |
| 7  | 3~    | 400 | 50 | 650               | 236             | 0.40 | 57                | 64                | 64                 | 6450              | 56              | 3795           | 0.22            |
| 8  | 3~    | 400 | 50 | 650               | 266             | 0.45 | 65                | 72                | 72                 | 4100              | 81              | 2410           | 0.33            |
| 9  | 3~    | 400 | 50 | 550               | 85              | 0.17 | 54                | 60                | 60                 | 8390              | 0               | 4940           | 0.00            |
| 10 | 3~    | 400 | 50 | 550               | 116             | 0.21 | 52                | 58                | 58                 | 7150              | 20              | 4210           | 0.08            |
| 11 | 3~    | 400 | 50 | 550               | 143             | 0.24 | 53                | 60                | 60                 | 5455              | 40              | 3210           | 0.16            |
| 12 | 3~    | 400 | 50 | 550               | 161             | 0.27 | 61                | 68                | 68                 | 3465              | 58              | 2040           | 0.23            |
| 13 | 3~    | 400 | 50 | 450               | 47              | 0.09 | 49                | 55                | 55                 | 6865              | 0               | 4040           | 0.00            |
| 14 | 3~    | 400 | 50 | 450               | 63              | 0.11 | 47                | 53                | 53                 | 5850              | 13              | 3445           | 0.05            |
| 15 | 3~    | 400 | 50 | 450               | 78              | 0.13 | 48                | 55                | 55                 | 4465              | 27              | 2625           | 0.11            |
| 16 | 3~    | 400 | 50 | 450               | 88              | 0.15 | 56                | 63                | 63                 | 2835              | 39              | 1670           | 0.16            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side · LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

