

EC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

W3G800-CG02-80 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G800-CG02-80	
Motor	M3G112-IA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		fa
State		prelim.
Speed (rpm)	min ⁻¹	770
Power input	W	600
Current draw	A	0.95
Max. back pressure	Pa	100
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	45.9	33.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		52.7	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.83
09 Air flow q_v	m³/h	12290
09 Pressure increase p_{fs}	Pa	103
10 Speed (rpm) n	min ⁻¹	770
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-173107



EC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Technical features

Mass	31.9 kg
Size	800 mm
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Press-fitted, coated sheet steel blank, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and plastic-coated in white aluminium (RAL 9006)
Material of guard grille	Steel, coated in white aluminium plastic (RAL 9006)
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2+
Note ambient temperature	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at ambient temperatures below -25°C (e.g. refrigeration applications) we recommend our fan version with special low-temperature bearings.
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, passive - RS485 MODBUS RTU - Soft start -Maximum EEPROM write cycles 100,000 - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	UL 1004-7 + 60730; C22.2 Nr.77 + CAN/CSA-E60730-1; EAC



W3G800-CG02-80

EC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Remark

Standard conformity as per EN 60335-1 in preparation




EC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Product drawing

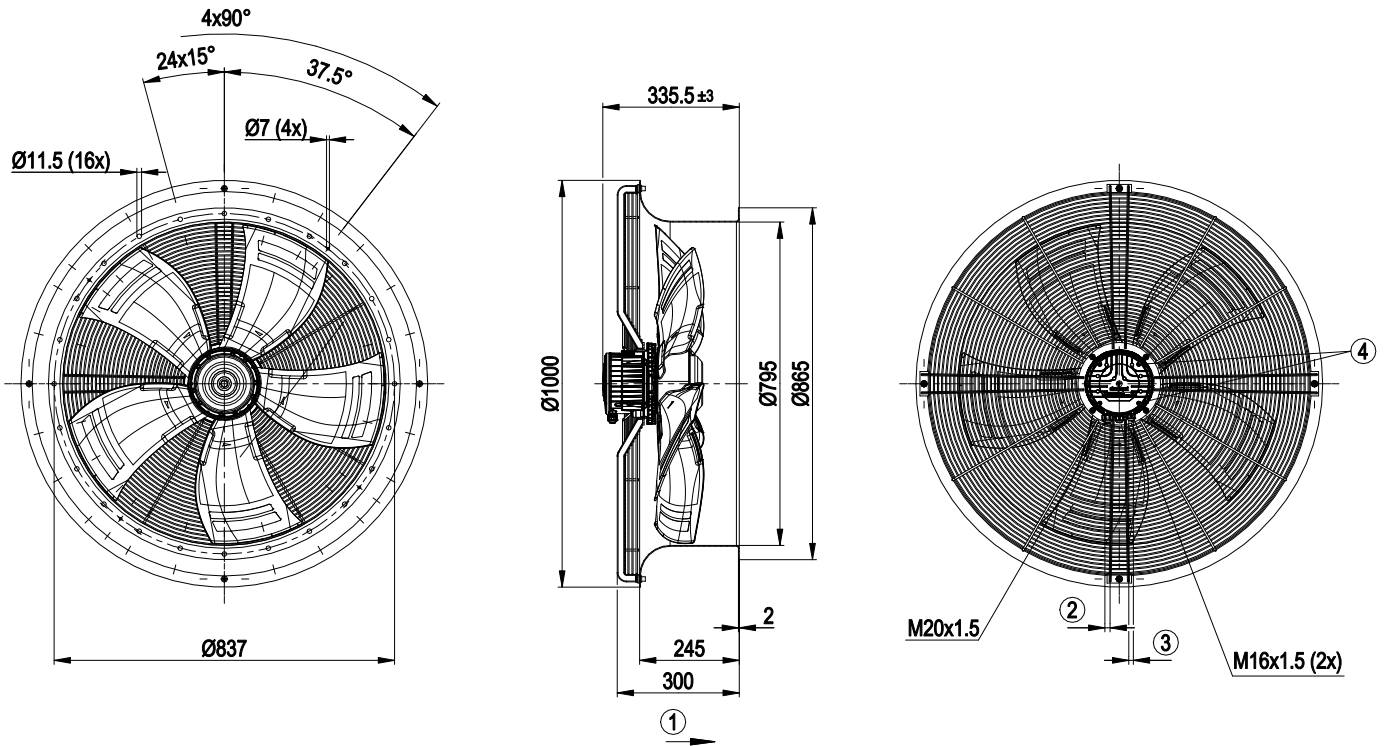

1	Direction of air flow "A"
2	Cable diameter min. 8 mm, max. 12 mm, tightening torque 2.5 ± 0.4 Nm
3	Cable diameter min. 6 mm, max. 10 mm, tightening torque 2.5 ± 0.4 Nm Cable diameter min. 4 mm, max. 7 mm, tightening torque 2.5 ± 0.4 Nm (use must be made of sealing ring provided)
4	Tightening torque 1.5 ± 0.2 Nm

EC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Connection screen

PE	PE	L1	L2	L3	NC	COM	GND	RSA	RSB	0-10 V	+10 V 24 V IN	
1	2	3	4	5	6	7	8	9	10	11	12	


No.	Conn.	Designation	Function / assignment
	1	PE	Protective earth
	2	PE	Protective earth
	3	L1	Power supply
	4	L2	Power supply
	5	L3	Power supply
	6	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on mains side and basic insulation on control interface side
	7	COM	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on mains side and basic insulation on control interface side
	8	GND	Signal ground for control interface, SELV
	9	RSA	RS-485 interface for MODBUS, RSA; SELV
	10	RSB	RS-485 interface for MODBUS, RSB; SELV
	11	0-10 V	Analogue input (set value) SELV, 0-10 V, Ri=100kΩ, parametrisable curve
	12	+10 V	Fixed voltage output 10 VDC, SELV, +10 V +/-3%, max. 10 mA short-circuit-proof, power supply for ext. devices (e.g. potentiometer); Fixed voltage input 24 VDC for parameter setting via MODBUS without mains power supply

EC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Charts: Air flow 50 Hz

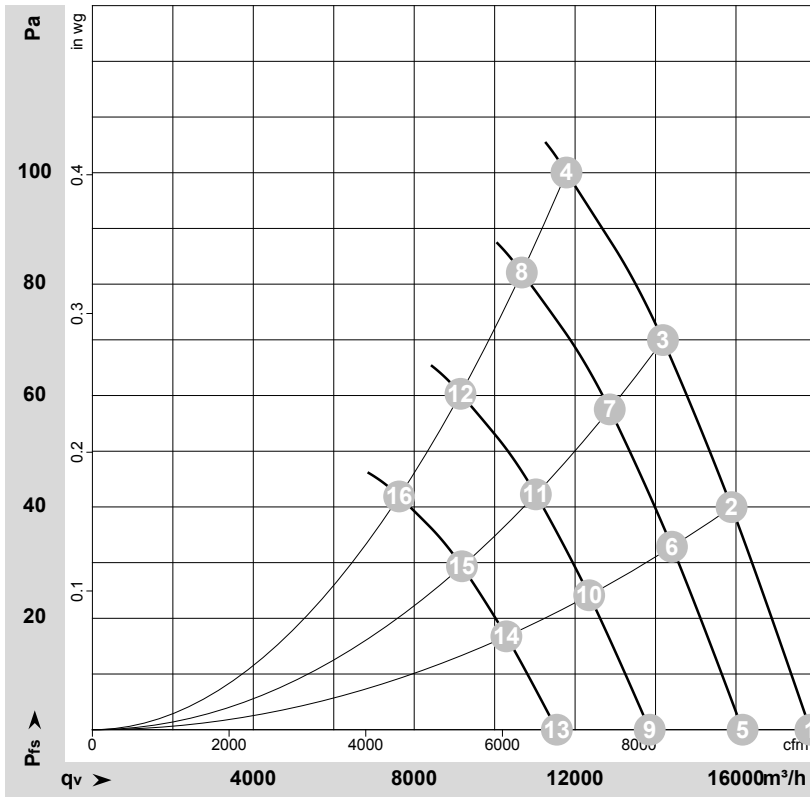

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-173749-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	400	50	770	600	0.95	69	75	74	17850	0	10505	0.00
2	400	50	770	692	1.08	67	73	73	15890	40	9355	0.16
3	400	50	770	755	1.17	66	72	72	14185	70	8350	0.28
4	400	50	770	826	1.28	67	72	72	11785	100	6935	0.40
5	400	50	700	443	0.70	66	73	72	16165	0	9515	0.00
6	400	50	700	516	0.81	64	71	70	14410	33	8480	0.13
7	400	50	700	563	0.87	64	70	69	12860	58	7570	0.23
8	400	50	700	614	0.95	64	70	69	10675	82	6285	0.33
9	400	50	600	279	0.44	62	69	68	13855	0	8155	0.00
10	400	50	600	325	0.51	60	67	67	12350	24	7270	0.10
11	400	50	600	355	0.55	60	66	65	11025	42	6490	0.17
12	400	50	600	387	0.60	61	66	66	9150	60	5385	0.24
13	400	50	500	161	0.25	58	64	63	11545	0	6795	0.00
14	400	50	500	188	0.29	56	62	62	10290	17	6060	0.07
15	400	50	500	205	0.32	55	61	61	9185	29	5405	0.12
16	400	50	500	224	0.35	56	61	61	7625	42	4490	0.17

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_v = Air flow · p_{fs} = Pressure increase

