

W3G800-GV05-75

Heatcraft AU/NZ

# EC axial fan - HyBlade®

sickled blades (S series)

with full square nozzle

W3G800-GV05-75 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
County court Stuttgart · HRB 590142



## Nominal data

Type	W3G800-GV05-75	
Motor	M3G150-NA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min <sup>-1</sup>	1090
Power input	W	2980
Current draw	A	4.5
Max. back pressure	Pa	260
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	65

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

		Actual	Request 2013	Request 2015
Installation category	A			
Efficiency category	Static			
Variable speed drive	Yes			
Specific ratio*	1.00			
Overall efficiency $\eta_{es}$	%	44.3	32.3	36.3
Efficiency grade N		48	36	40
Power input $P_{ed}$	kW	2.64		
Air flow $q_v$	m <sup>3</sup> /h	18445		
Pressure increase $p_{fs}$	Pa	217		
Speed n	min <sup>-1</sup>	1090		

Data definition with optimum efficiency. LU-142822  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

\* Specific ratio =  $1 + p_b / 100\,000\text{ Pa}$



W3G800-GV05-75

Heatcraft AU/NZ

## EC axial fan - HyBlade®

sickled blades (S series)

with full square nozzle

### Technical features

Mass	48.5 kg
Size	800 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of mounting ring	Steel, coated in black plastic (RAL 9005)
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Operation and alarm display</li><li>- External 24 V input (programming)</li><li>- External release input</li><li>- Alarm relay</li><li>- Integrated PID controller</li><li>- Motor current limit</li><li>- PFC, passive</li><li>- RS485 MODBUS RTU</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Over-temperature protected electronics / motor</li><li>- Line undervoltage / phase failure detection</li></ul>
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC interference emission	Acc. to EN 61000-6-4 (industrial environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE




W3G800-GV05-75  
Heatcraft AU/NZ

# EC axial fan - HyBlade®

sickled blades (S series)  
with full square nozzle


## Product drawing

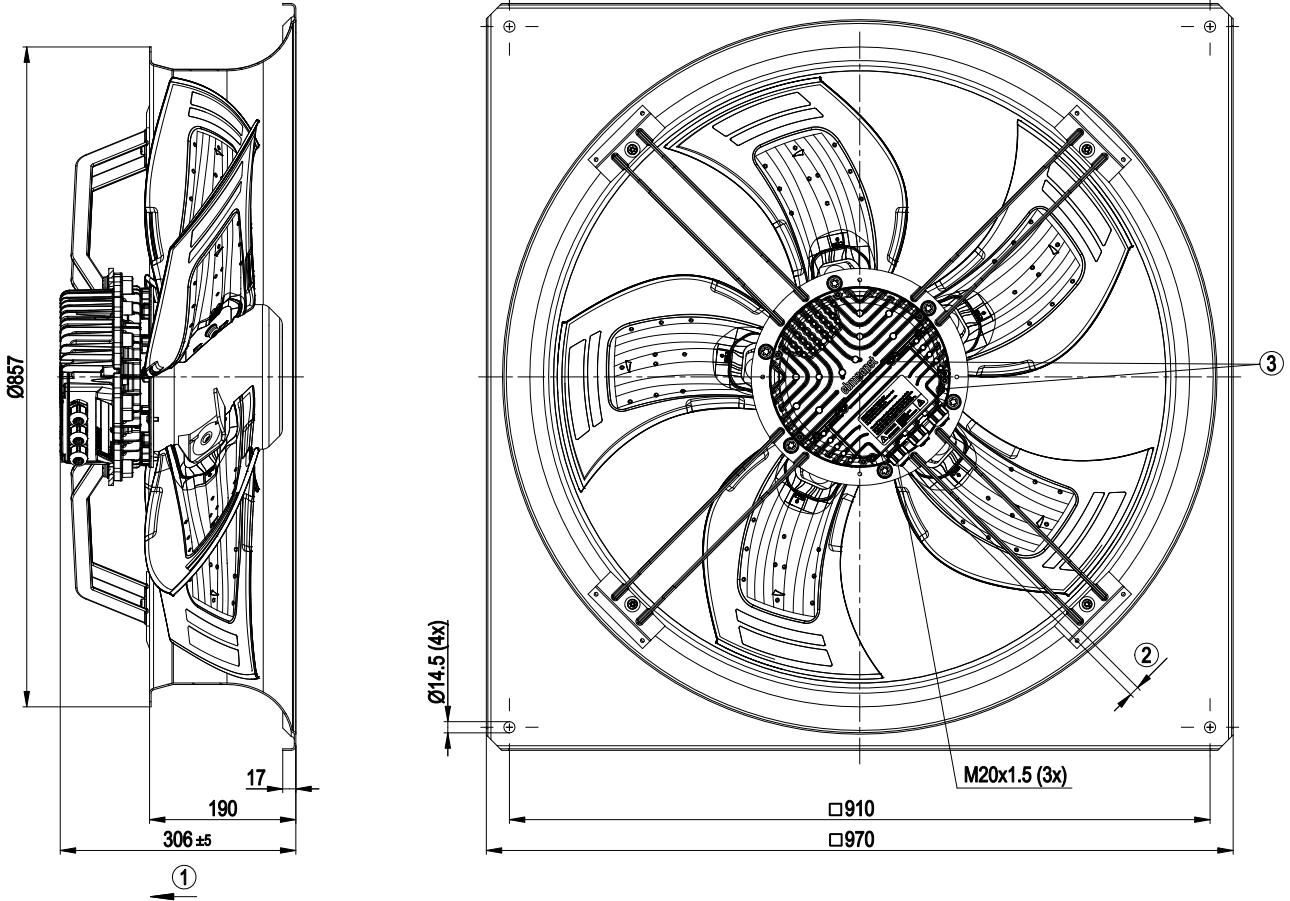

1	Direction of air flow "V"
2	Cable diameter min. 4 mm, max. 10 mm; tightening torque 4±0.6 Nm
3	Tightening torque 3.5±0.5 Nm




## Connection screen

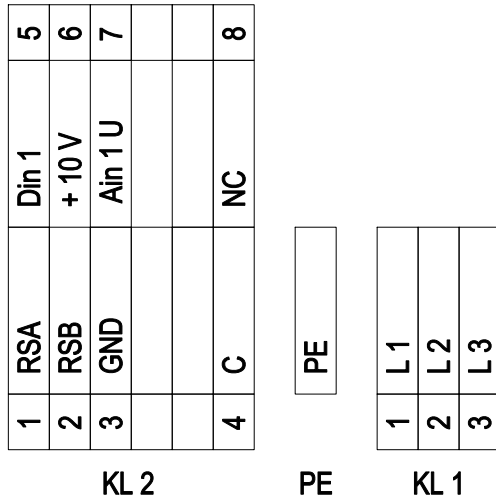

No.	Conn.	Designation	Function / assignment
KL 1	1	L1	Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz
KL 1	2	L2	Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz
KL 1	3	L3	Mains supply connection, supply voltage 3~380-480 VAC; 50/60 Hz
PE		PE	Earth connection, PE connection
KL 2	1	RSA	Bus connection RS-485, RSA, MODBUS RTU; SELV
KL 2	2	RSB	Bus connection RS-485, RSB, MODBUS RTU; SELV
KL 2	3	GND	Signal ground for control interface; SELV
KL2	4	C	Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / 2 A (AC1)
KL 2	5	Din1	Digital input 1 enabling of electronics, enabling: open pin or applied voltage 5-50 VDC disabling: bridge to GND or applied voltage <1 VDC reset function: triggers software reset after a level change to <1 V; SELV
KL 2	6	+ 10 V	Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer), SELV
KL 2	7	Ain1 U	Analogue input 1 (set value) 0-10 V, Ri = 100 kΩ, parametrisable curve, only usable as alternative to input Ain1 I SELV
KL2	8	NC	Status relay, floating status contact; break for failure

## Charts: Air flow 50 Hz

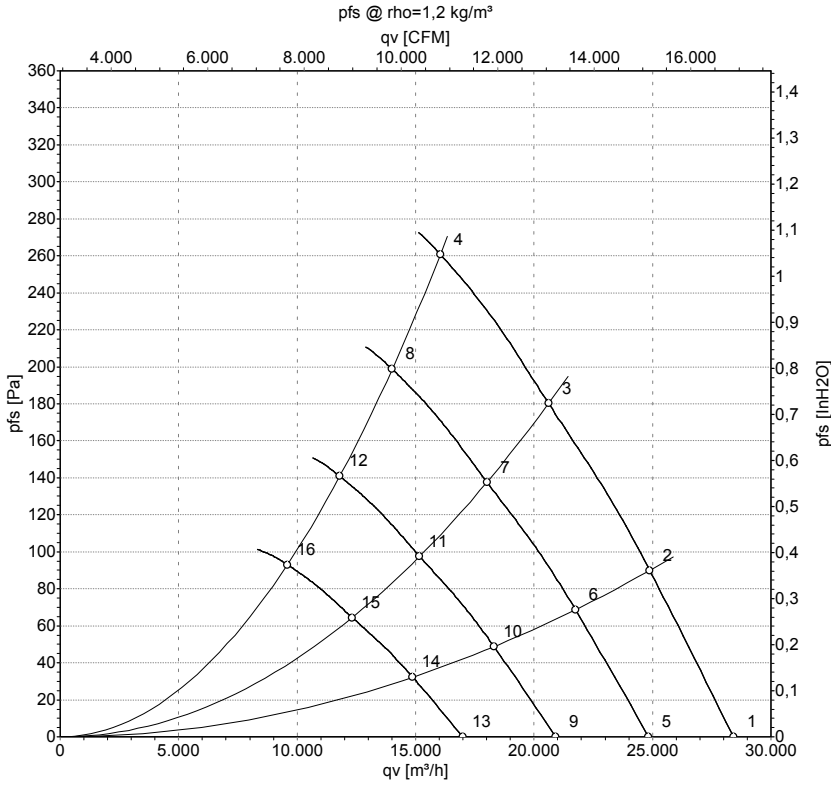

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	400	50	1090	1911	3.00	64	77	77	28415	0
2	400	50	1090	2240	3.49	64	76	76	24885	90
3	400	50	1090	2531	3.92	65	78	77	20615	180
4	400	50	1090	2980	4.50	71	83	82	16050	260
5	400	50	950	1276	2.00	61	73	74	24835	0
6	400	50	950	1496	2.33	60	73	73	21745	69
7	400	50	950	1690	2.62	62	74	73	18015	137
8	400	50	950	1879	2.90	68	80	79	14015	199
9	400	50	800	762	1.20	57	69	70	20910	0
10	400	50	800	893	1.39	56	68	68	18315	49
11	400	50	800	1009	1.56	58	70	69	15170	97
12	400	50	800	1122	1.73	63	76	75	11800	141
13	400	50	650	409	0.64	51	64	65	16990	0
14	400	50	650	479	0.75	51	63	63	14880	32
15	400	50	650	541	0.84	53	65	64	12325	64
16	400	50	650	602	0.93	58	70	69	9590	93

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
qv = Air flow · p<sub>fs</sub> = Pressure increase

