

AC axial fan

sickled blades (S series), single inlet
Wall ring with guard grille

W4D250-CM40-01 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W4D250-CM40-01				
Motor	M4D068-CF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1370	1530	1370	1530
Power input	W	25	33	25	33
Current draw	A	0.1	0.1	0.06	0.06
Max. back pressure	Pa	40	50	40	50
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	70	70	70	70
Starting current	A	0.26	0.26	0.15	0.15

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan

sickled blades (S series), single inlet

Wall ring with guard grille

Technical features


Mass	2.9 kg
Size	250 mm
Surface of rotor	Coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	7
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H0+
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1, motor does not have factory-installed overheating protection; CE
Approval	CCC; EAC



AC axial fan

sickled blades (S series), single inlet
Wall ring with guard grille

Product drawing

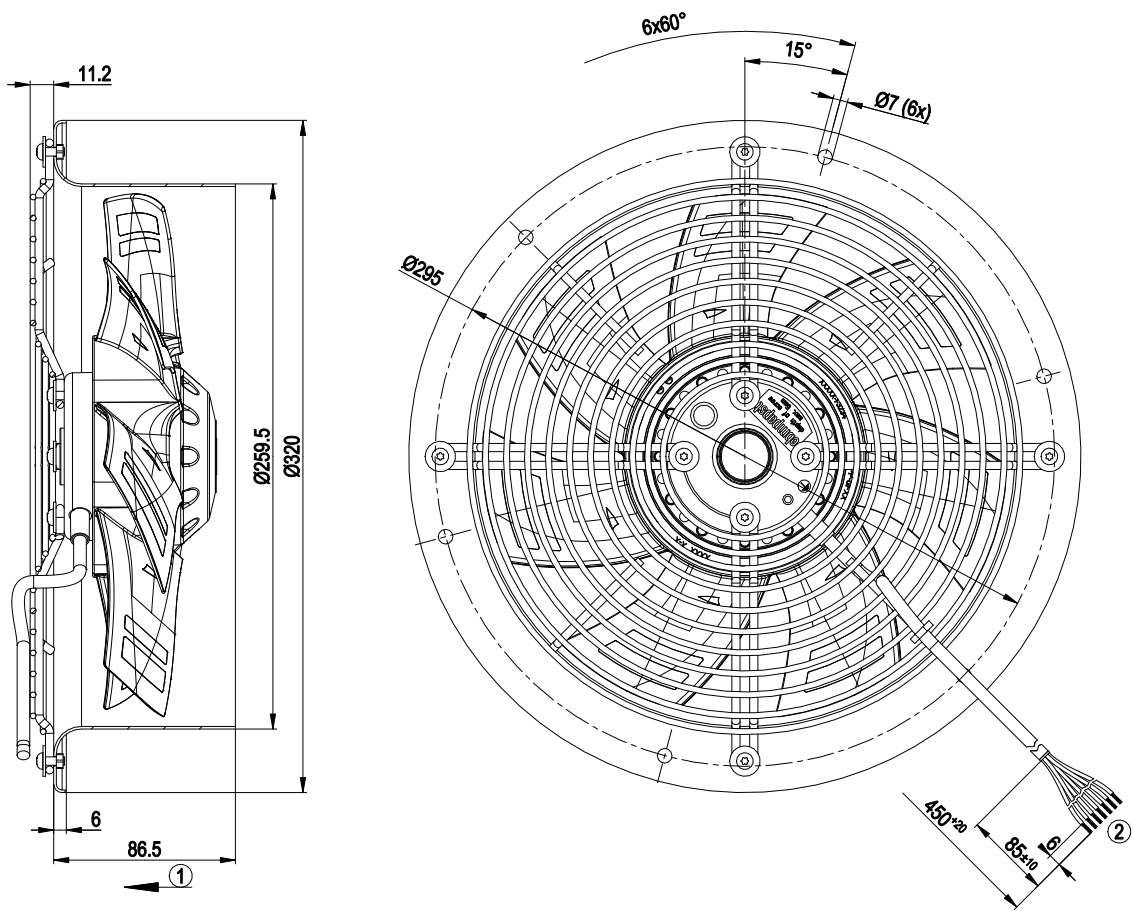

1	Direction of air flow "V"
2	Connection line PVC 7G 0.5 mm², 7x lead tips crimped



AC axial fan

sickled blades (S series), single inlet
Wall ring with guard grille

Connection screen




Change direction of rotation by reversing two phases

	Three-phase motor	Δ	Delta connection	Y	Star connection
L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
U2	green	V2	white	W2	yellow
PE	green/yellow				



AC axial fan
sickled blades (S series), single inlet
Wall ring with guard grille

Charts: Air flow 50 Hz

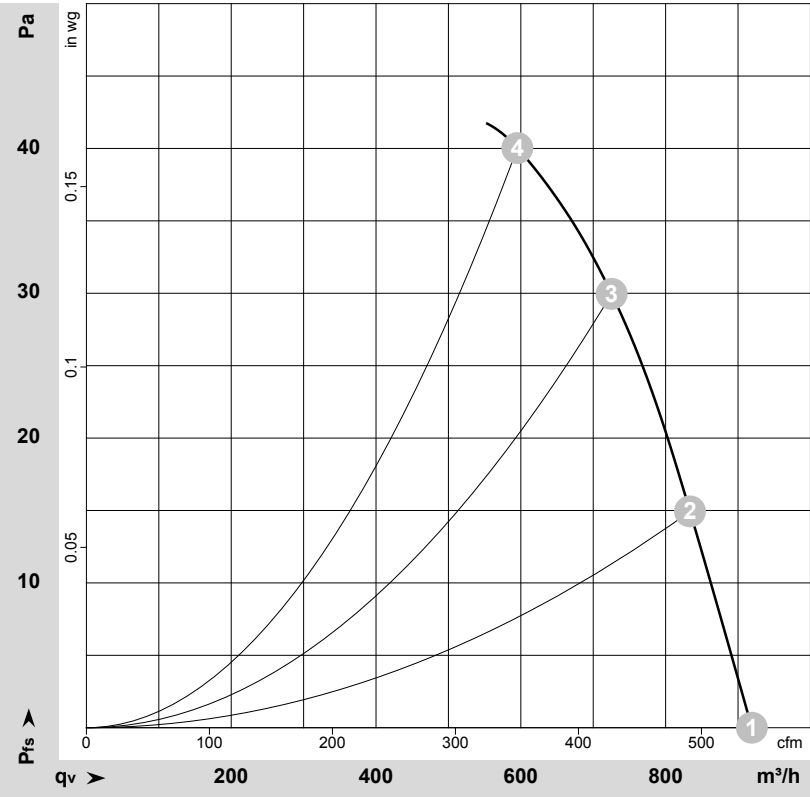

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-168462-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values


	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Y	400	50	1410	21	0.06	49	56	920	0	540	0.00
2	Y	400	50	1390	23	0.06	49	56	835	15	490	0.06
3	Y	400	50	1380	24	0.06	48	55	725	30	425	0.12
4	Y	400	50	1370	25	0.06	50	57	595	40	350	0.16

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
q_v = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series), single inlet
Wall ring with guard grille

Charts: Air flow 60 Hz

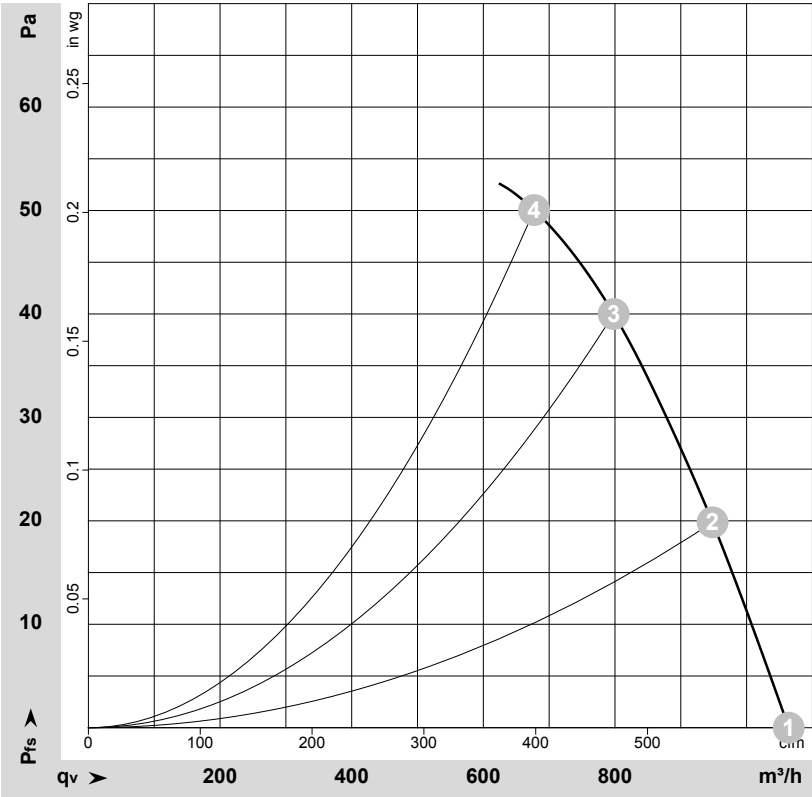

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-168592-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Y	400	60	1615	26	0.05	53	60	1065	0	625	0.00
2	Y	400	60	1575	30	0.06	52	59	950	20	560	0.08
3	Y	400	60	1545	32	0.06	52	59	800	40	470	0.16
4	Y	400	60	1530	33	0.06	53	60	675	50	400	0.20

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
q_v = Air flow · p_{fs} = Pressure increase

