

AC axial fan

straight blades (A series)
with full round nozzle

W4D300-CA04-01 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W4D300-CA04-01				
Motor	M4D068-DF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	1350	1520	1350	1520
Power input	W	68	93	68	93
Current draw	A	0.28	0.30	0.16	0.18
Max. ambient temperature	°C	85	80	85	80

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



AC axial fan

straight blades (A series)

with full round nozzle


Technical features

Size	300 mm
Surface of rotor	Coated in black
Material of impeller	Sheet steel, hot-dip galvanised
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"B"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1
Approval	CCC



AC axial fan
straight blades (A series)
with full round nozzle

Product drawing

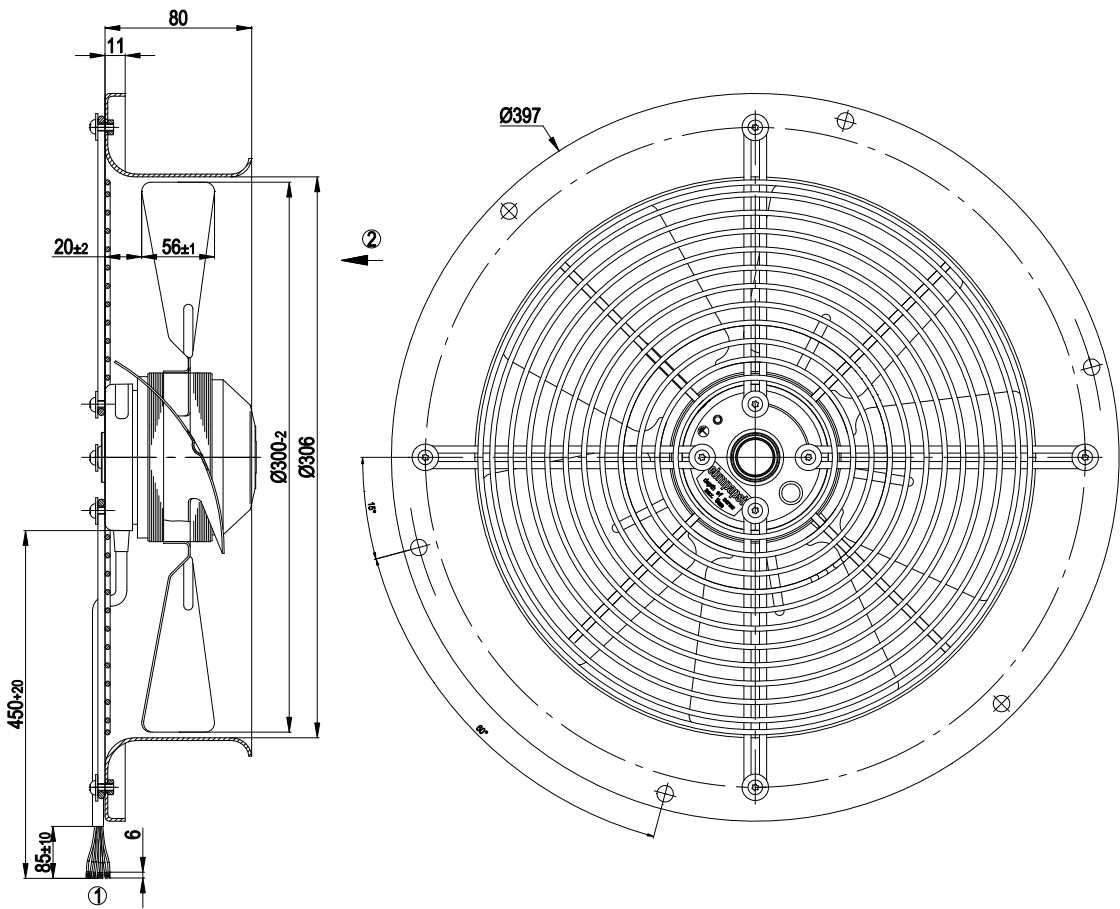


- | | |
|---|---|
| 1 | Connection line PVC, 7x brass lead tips crimped |
| 2 | Direction of air flow "V" |



AC axial fan

straight blades (A series)
with full round nozzle

Connection screen



Changing the direction of rotation by reversing the two phases


PE	green/yellow	L1	black	L2	blue
L3	brown	Y	Star connection		



AC axial fan

straight blades (A series)
with full round nozzle

Charts: Air flow 50 Hz

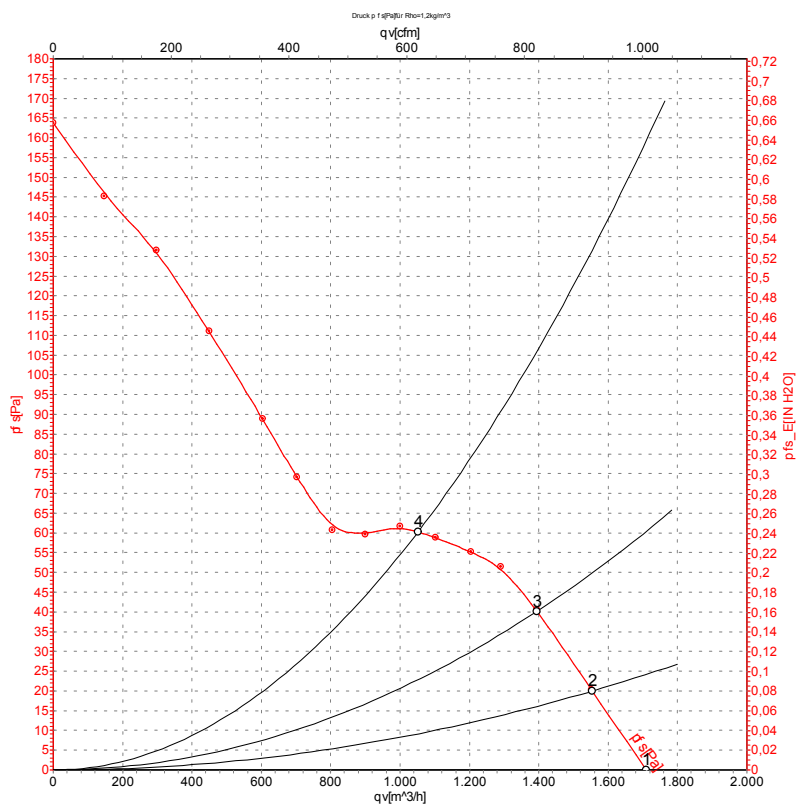

Measurement: LU-120379

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	400	50	1350	68	0.16	1710	0
2	400	50	1350	73	0.16	1555	20
3	400	50	1340	76	0.16	1395	40
4	400	50	1335	79	0.16	1050	60

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan
straight blades (A series)
with full round nozzle

Charts: Air flow 60 Hz

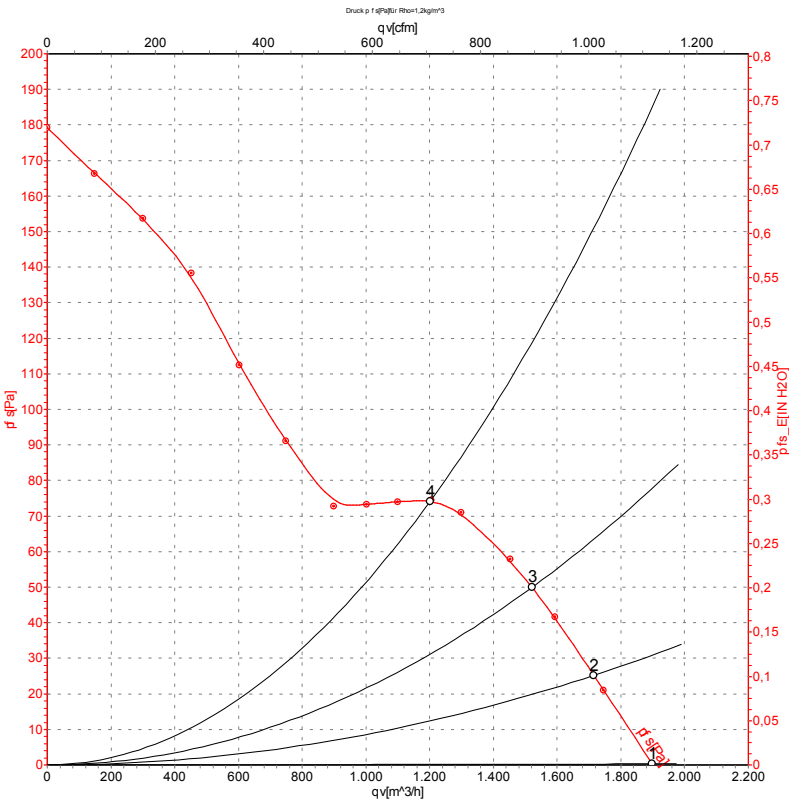

Measurement: LU-120380

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	400	60	1520	93	0.18	1900	0
2	400	60	1495	101	0.18	1715	25
3	400	60	1475	106	0.18	1520	50
4	400	60	1455	110	0.18	1200	75

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

