

AC axial fan

sickled blades (S series)
Wall ring with guard grille

W4D315-CS28-35 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W4D315-CS28-35			
Motor	M4D068-DF			
Phase		3~	3~	3~
Nominal voltage	VAC	400	400	480
Connection		Y	Y	Y
Frequency	Hz	50	60	60
Type of data definition		ml	ml	ml
Valid for approval / standard		CE	CE	CE
Speed (rpm)	min ⁻¹	1320	1450	1540
Power input	W	95	127	145
Current draw	A	0.2	0.22	0.23
Max. back pressure	Pa	60	70	80
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	70	70	70
Starting current	A	0.5	0.49	0.6

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan

sickled blades (S series)

Wall ring with guard grille

Technical features

Mass	4.4 kg
Size	315 mm
Surface of rotor	Coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F2-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE




AC axial fan

sickled blades (S series)

Wall ring with guard grille

Product drawing

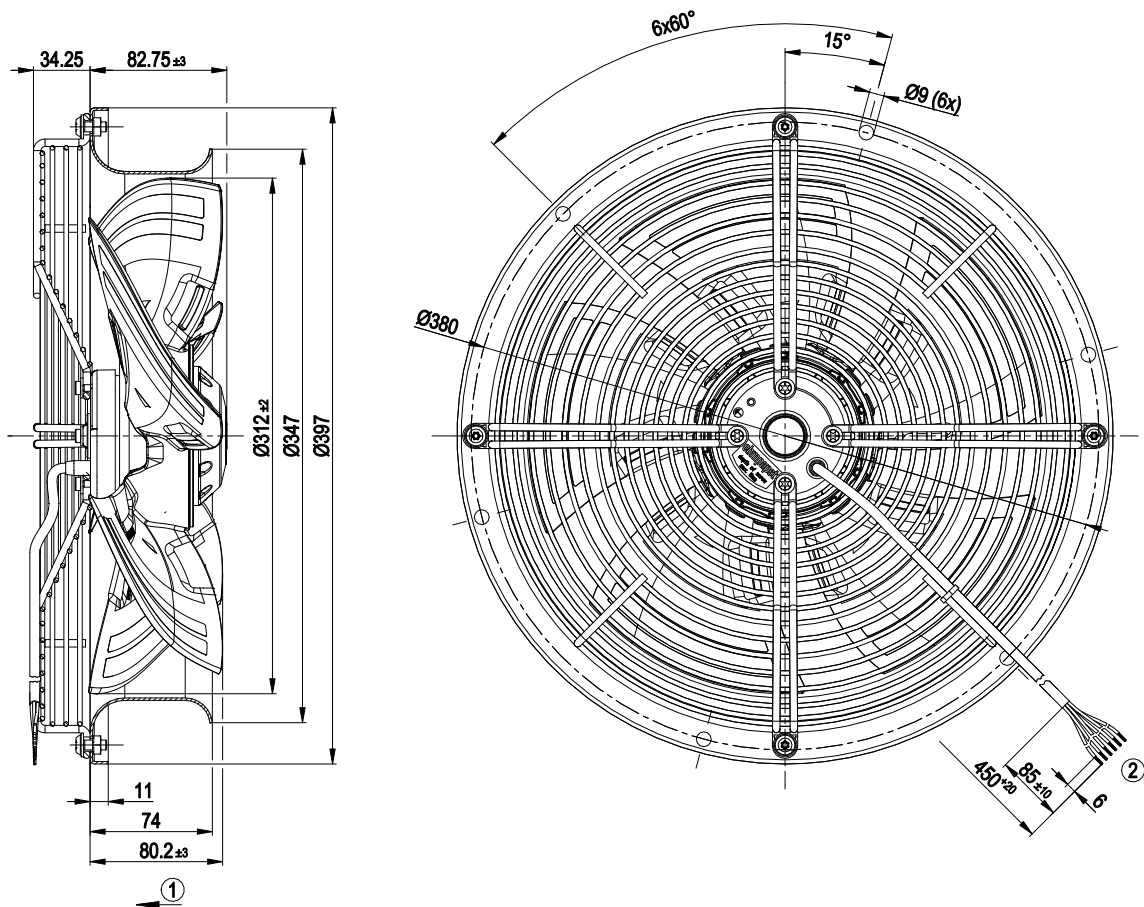


- | | |
|---|--|
| 1 | Direction of air flow "A" |
| 2 | Connection line halogen- and silicone-free 6G 0.5 mm ² , 6x lead tips crimped |



AC axial fan

sickled blades (S series)
Wall ring with guard grille

Connection screen

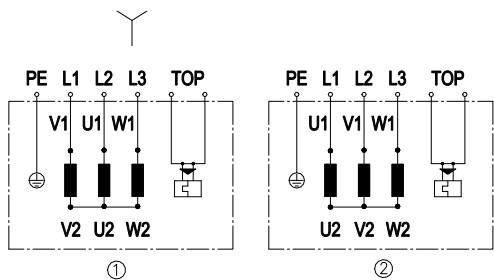

Change direction of rotation by reversing two phases

	Three-phase motor
Y	Star connection
1	Anti-clockwise operation
L1	= V1 = blue
L2	= U1 = black
L3	= W1 = brown
2	Clockwise operation
L1	= U1 = black
L2	= V1 = blue
L3	= W1 = brown
PE	green/yellow
TOP	2x grey




AC axial fan

sickled blades (S series)

Wall ring with guard grille

Charts: Air flow 50 Hz

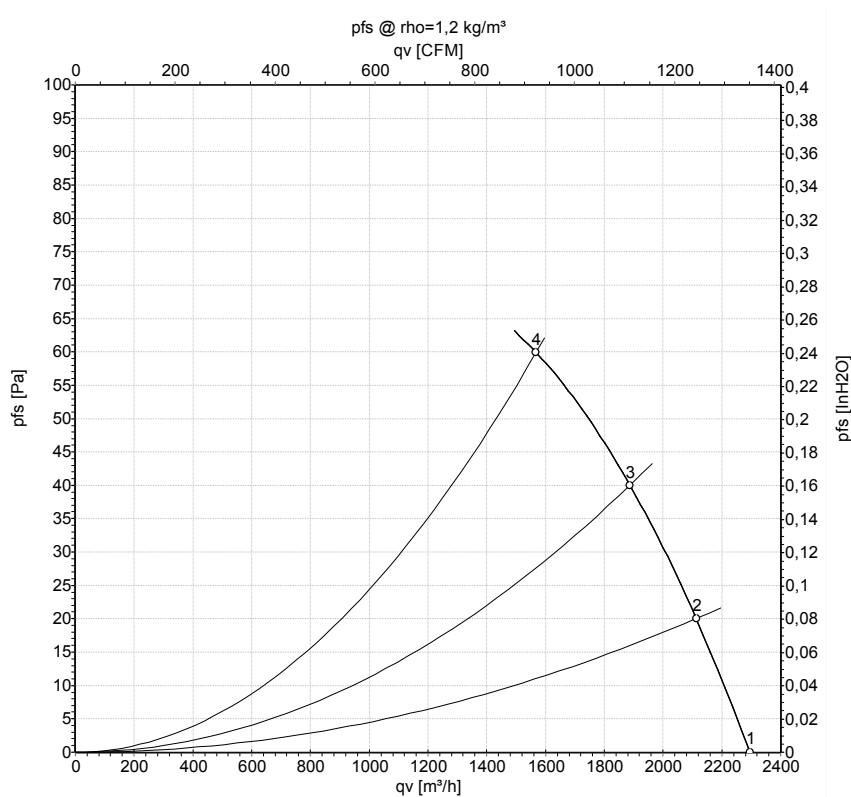

Measurement: LU-160764-1

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{WA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values


	Conn.	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	Y	400	50	1370	77	0.17	2295	0	1350	0.00
2	Y	400	50	1355	81	0.18	2115	20	1245	0.08
3	Y	400	50	1345	86	0.18	1885	40	1110	0.16
4	Y	400	50	1320	95	0.20	1570	60	925	0.24

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series)
Wall ring with guard grille

Charts: Air flow 60 Hz

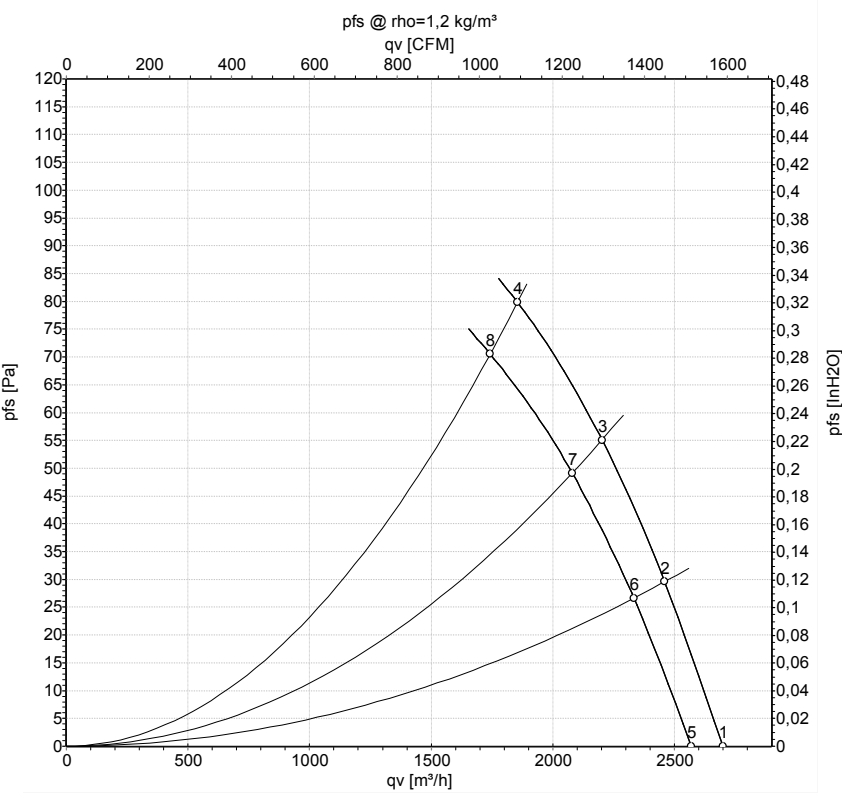

Measurement: LU-160800-1
Measurement: LU-160793-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	Y	480	60	1605	118	0.19	2700	0	1590	0.00
2	Y	480	60	1585	127	0.20	2460	30	1450	0.12
3	Y	480	60	1570	133	0.20	2205	55	1295	0.22
4	Y	480	60	1540	145	0.23	1855	80	1090	0.32
5	Y	400	60	1530	105	0.18	2570	0	1515	0.00
6	Y	400	60	1505	112	0.19	2335	27	1375	0.11
7	Y	400	60	1480	118	0.20	2080	49	1225	0.20
8	Y	400	60	1450	127	0.22	1745	70	1025	0.28

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

